

| | | |
|---------------------------|---------------------------------|---|
| 53001010 | DATA SHEET |  |
| Valid from: 02.07.2019 | SKINDICHT® O-RING NBR PG | |


The SKINDICHT® O-Ring are sealing rings of NBR used for reliable sealing against oil, dust and water on the connecting thread of glands or similar components.



Technical features:

| | |
|-------------------|--|
| Material | NBR , halogen-free, UV-resistant, Ozone-resistant |
| Color | Black |
| Sizes | PG7 up to PG48 |
| Temperature range | -20 °C up to +100 °C |

| Article designation | Inner Ø x cord thickness [mm] | Article No. |
|---------------------|-------------------------------|-------------|
| PG 7 | 10 x 1,5 | 53001010 |
| PG 9 | 13 x 1,5 | 53102011 |
| PG 11 | 16 x 1,5 | 53001020 |
| PG 13,5 | 18 x 1,5 | 52005740 |
| PG 16 | 20 x 1,5 | 53001030 |
| PG 21 | 26 x 2 | 52005750 |
| PG 29 | 34 x 2 | 53001040 |
| PG 36 | 44 x 2 | 52005760 |
| PG 42 | 50 x 2 | 53001050 |
| PG 48 | 55 x 2 | 52005770 |

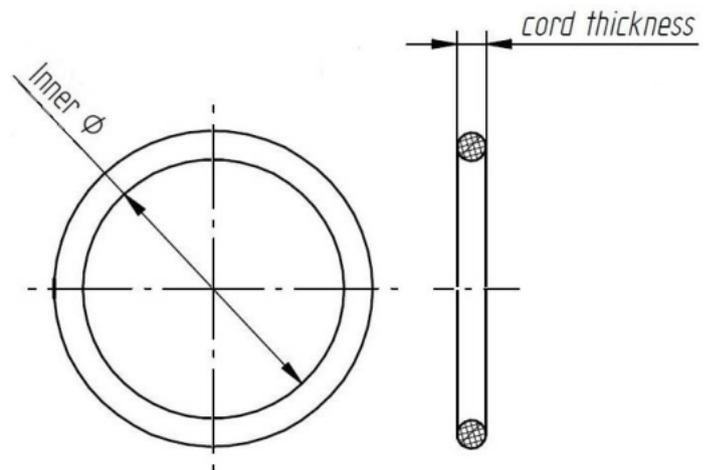

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

AbN
automation

| | | |
|--|---------------------------------------|-------------|
| Creator: MAU1/PDP Released: DAMU1/PDP | Document: DB53001010EN Version: 05 | Page 1 of 1 |
|--|---------------------------------------|-------------|