

55503476	DATA SHEET	
Valid from: 03.07.2018	SILVYN® LCC CONNECTOR	

The SILVYN® LCC Connector is a conduit coupler, for the extension of conduits.


- Material:** Body – Nickel plated brass
Seal – Elastomer
- Features** High tensile strength
Resistant to oil
Corrosion resistant
Chemical resistant
Conforms to DIN EN 61386-23



Temperature range: -50°C up to +135 °C

Note: Free of halogen, Sulphur and Phosphorous

Protection class: IP 65

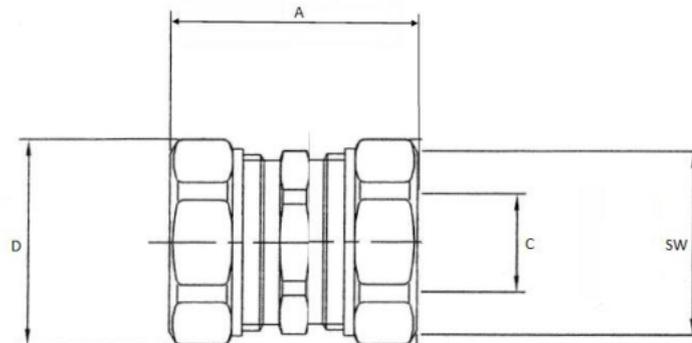

Dimension table:

Part No.	Part name	Nominal size	Length A mm	Inner Ø C mm	Outer Ø D mm	SW
5550 3476	SILVYN® LCC Connector	16	39,0	11,5	26	24
5550 3477	SILVYN® LCC Connector	20	39,5	15,3	29	26
5550 3478	SILVYN® LCC Connector	25	46,9	19,1	35	33
5550 3479	SILVYN® LCC Connector k	32	56	26	42	40

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

AbN
automation

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55503476EN Version: 01	Page 1 of 1
---	---------------------------------------	-------------