

61801999	DATA SHEET
Valid from: 08.08.2025	TWIN conductor end sleeves

Insulated TWIN conductor end sleeves.



Material:

Sleeve	Copper, tin-plated
Feed funnel	Polypropylene

Technical features:

Nominal sizes	0,5 mm ² up to 16 mm ²
Temperature range	-5°C up to +105°C
Conductor class	Class 2, 5 and 6

Licence to practice medicine:



E507990

Reference standards:

DIN 46228 - Part 4

Suitable tools:


PEW 8.185 Crimping pliers
PEW 8.186 Crimping pliers
PEW 8.87 Crimping pliers
CK 90 pliers

AbN
automation

Please refer to our current catalogue for further details.
Our laboratory will be happy to advise you on questions of resistance to aggressive media or certain oils.

61801999	DATA SHEET
Valid from: 08.08.2025	TWIN conductor end sleeves

Technical drawing:

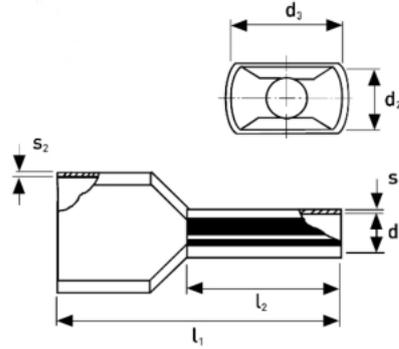

Dimension table

Article no.	For mm ²	Colour	UL	l_1	l_2	d_1	d_2	d_3	s_1	s_2
61801999	0,5	White	Yes	15	8	1,4	2,5	4,7	0,15	0,25
61802000	0,75	Grey	Yes	15	8	1,7	2,8	5	0,15	0,25
61802010	1	Red	Yes	15	8	1,95	3,4	5,4	0,15	0,3
61802020	1,5	Black	Yes	16	8	2,2	3,6	6,6	0,15	0,3
61802030	2,5	Blue	Yes	18,5	10	2,8	4,2	7,8	0,2	0,3
61802032	4	Grey	Yes	23	12	3,7	4,9	8,8	0,2	0,4
61802033	6	Yellow	Yes	26	14	4,8	6,9	10	0,2	0,4
61802034	10	Red	Yes	26	14	6,4	7,2	13	0,2	0,4
61802035	16	Blue	Yes	30	14	8,2	9,6	18,4	0,2	0,4