

6180 6550	DATA SHEET	
Valid from: 25.04.2018	SILVYN® SINUS PA6	

The SILVYN® SINUS PA6 is a parallel corrugated protection conduit with a sinusoidal slit for the subsequent assembling on installed cable and wire.



Material: Polyamide 6

Technical features:

Profile Parallel corrugated with sinusoidal slit
 Nominal size NW 7,5 up to NW 23
 Temperature range -40°C up to +140°C


Additional features:

Fire classification HB acc. to UL94
 Free of halogen und cadmium
 UV-Resistant

Color: Black

Suitable glands: SILVYN® SPLIT GMP-M
 SILVYN® SPLIT COS
 SILVYN® FCL

Product drawing:

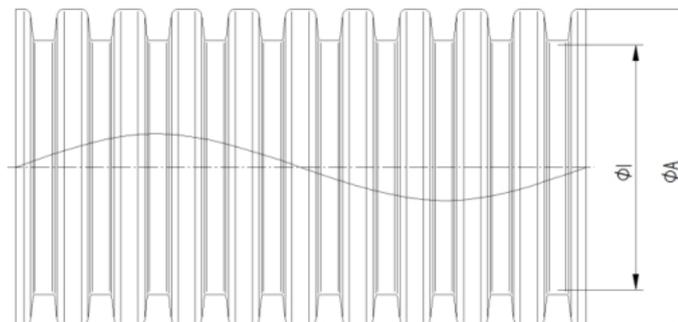

Dimension table:

Part No.	NW	Diameter mm		Max. Bending radius mm	Weight g/m
		ØI	ØA		
6180 6550	7,5	6,7	10,0	21	22
6180 6555	8,5	8,4	11,4	24	25
6180 6560	10	9,9	13,0	26	28
6180 6565	12	12,2	15,7	38	38
6180 6570	17	16,6	21,2	52	58
6180 6575	22	21,3	25,4	57	70
6180 6580	23	23,2	28,3	60	90

Automation

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB61806550EN Version: 03	Page 1 of 1
------------------------------------------	---------------------------------------	-------------