

63207020	DATA SHEET
Valid from: 09.02.2024	Tube cable lug Ni


Cable lug for high temperature applications.

Material: Nickel

Technical Features:

Application	For stranded and multi-stranded Copper conductors (class 2 and 5)
Cross section	0,5 up to 16mm ²
Mounting hole	M3 up to M10
Temperature range	up to +650°C

Technical drawing:

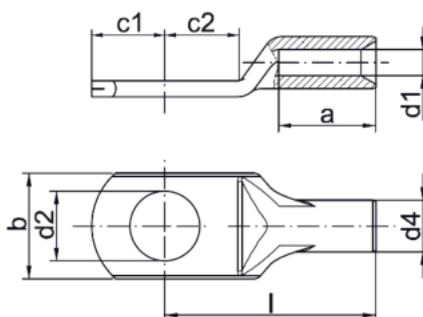

Dimension table:

Part No.	Nominal cross-section mm ²	Screw hole Ø	Dimension mm							
			d1	a	b	d2	d4	c1	c2	l
63207020	0,5 – 1	M3	1,6	4	6,5	3,2	3,2	3,5	4,5	13
63207021		M4	1,6	6	6,5	4,3	3,2	4,5	4,5	13
63207022		M5	1,6	6	7,5	5,3	3,2	5,0	5,5	14
63207023	1,5 – 2,5	M3	2,3	6	7,0	3,2	3,9	3,5	5,0	13
63207024		M4	2,3	6	7,0	4,3	3,9	4,5	5,0	13
63207025		M5	2,3	6	7,5	5,3	3,9	5,0	5,5	14
63207026		M6	2,3	6	9,5	6,5	3,9	6,0	6,5	16
63207027	4 – 6	M4	3,6	9	9,5	4,3	5,6	4,5	5,0	18
63207028		M5	3,6	9	9,5	5,3	5,6	5,0	5,5	19
63207029		M6	3,6	9	9,5	6,5	5,6	6,0	6,5	19
63207030		M8	3,6	6	14	8,5	5,6	8,5	9,0	22
63207031	10	M5	4,5	10	12	5,5	6,5	5,5	6,5	21
63207032		M6	4,5	10	12	6,5	6,5	6,5	7,5	22
63207033	16	M5	5,5	13	12	5,5	7,5	5,5	6,5	26
63207034		M6	5,5	13	12	6,5	7,5	6,5	7,5	27
63207035		M8	5,5	13	13,5	8,5	7,5	8,5	9,5	29
63207036		M10	5,5	11	17	10,5	7,5	12,0	12,0	31

Commodity product, not a Lapp product.

AbN
automation

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Document: DB63207020EN Version: 00	Page 1 of 1
---------------------------------------	-------------