

75009699

DATA SHEETValid from:
31.10.2018**EPIC® SIGNAL M23 KIT A1 8+1 PINS SOLDER
TERMINATION****LAPP****Description**

- Circular connector for servo cables and encoders
- Low-resistance screen contact
- Optimum EMC protection
- Use of high quality materials for increased reliability
- Complete connector with housing and insulation body, equipped with suitable solder contacts

**Components of the Combination**

Article number of the combination	75009699
Housing	SIGNAL M23 A1 (72004000)
Insert	8+1 Pin (E-Part) with solder termination (73002744)

General characteristics

Series	SIGNAL M23
Type	A1, Panel mounted
Version	Male
Connection type	Solder termination
Coding	Black (N)
Pin-arrangement	8+1 (E-Part)
Contact diameter, 8 Contacts	1 mm
Contact diameter, 1 Contact	2 mm
Termination cross section, 8 Contacts	Up to 1 mm ²
Termination cross section, 1 Contact	Up to 2,5 mm ²
Mounting type	Panel mount; through hole for: 4x M 2,5
Degree of protection	IP 68 (10 h / 1 m) (latched)
Cycles of mechanical operation	100
Temperature range	-25 °C to +125 °C

Materials and surfaces

Housing, base material	Zinc die-cast
Housing, surface	Nickel
Sealing	FPM/FKM
Insert	PA
Contact, base material	Brass
Contact, surface	Gold

Electrical characteristics

Rated voltage	IEC: 150 V
Rated impulse voltage	2,5 kV
Rated current	20 A (2 mm Contact) 7 A (1 mm Contacts)
Contact resistance	< 4 mOhm
Verschmutzungsgrad	3

AbN
automationCreator: STKU3/PDP
Released: IVSE1/PDPDocument: DB75009699EN
Version: 00

Page 1 of 3

We reserve all rights according to DIN ISO 16016.

PD 0019/05_04.18EN

75009699

DATA SHEET

Valid from:
31.10.2018EPIC® SIGNAL M23 KIT A1 8+1 PINS SOLDER
TERMINATION

Approvals


VDE-Approval, VDE-REG.-Nr.
UL File NumberC024
E249137

Standards

Safety Standard IEC 61984; UL 1977

Technical Drawings

Housing

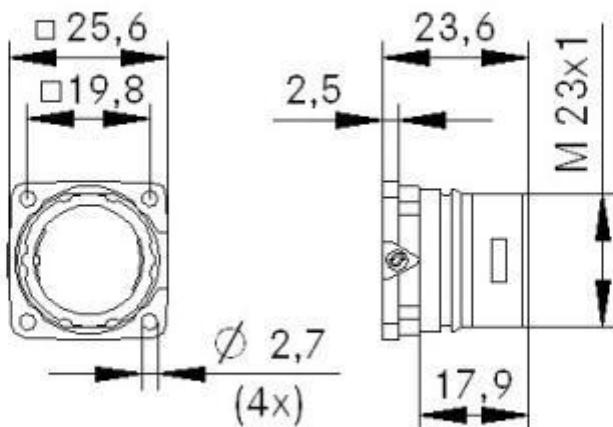


Insert




75009699

DATA SHEETValid from:
31.10.2018**EPIC® SIGNAL M23 KIT A1 8+1 PINS SOLDER
TERMINATION****LAPP**

Good chemical resistance



Industrial machinery and plant engineering



Optimum strain relief



Mechanical resistance



Assembly time



Robust



Integrated SKINTOP® cable gland



Wind energy



Variety of approval certifications

Info

Robust metal connector with integrated EMC cable gland

Application range

Plant engineering

Servo drives and Servo assemblies

Measurement and control technology

Apparatus construction

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

AbN
automationCreator: STKU3/PDP
Released: IVSE1/PDPDocument: DB75009699EN
Version: 00

Page 3 of 3

We reserve all rights according to DIN ISO 16016.

PD 0019/05_04.18EN