
# Selection diagram

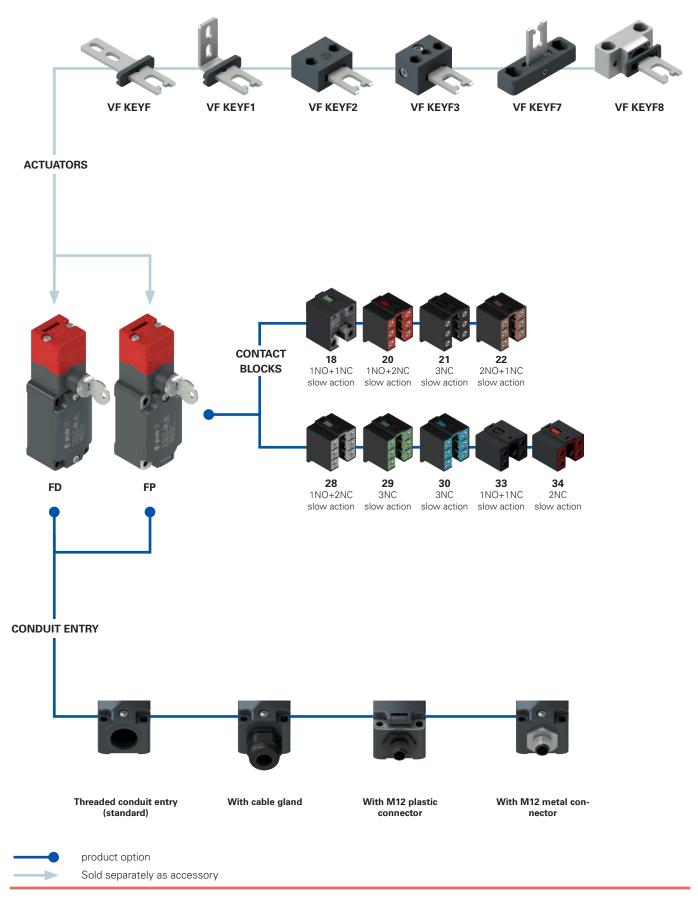

## **Code structure**

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

FD 1899-F1GM2K50T6V200

#### Housing

FD metal, one conduit entry

FP technopolymer, one conduit entry

Contact block					
	Contacts activated by the lock	Contacts activated by actuator extraction			
18	1NO+1NC				
20	1NO+2NC				
21	3NC				
22	2NO+1NC				
28	1NO+1NC	1NC			
29	2NC	1NC			
30	1NC	2NC			
33	1NO+1NC				

2NC

34

Act	uators		
	without actuator (standard)		
F	straight actuator VF KEYF		
F1	angled actuator VF KEYF1		
F2	jointed actuator VF KEYF2		
F3	jointed actuator adjustable in two directions VF KEYF3		
F7	jointed actuator adjustable in one direction VF KEYF7		
F8	universal actuator VF KEYF8		

#### Lock key coding

one standard key coding (371)

V200 up to 8 different key codings

#### Ambient temperature

	-25°C	+80°C	(standard)
T6	-40°C	+80°C	

# Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 12 mm
17-0	1440

K50 M12 metal connector, 5-pole
...

For the complete list of possible combinations please contact our tech-

# Threaded conduit entry

M2	M20x1.5 (standard)
	PG 13.5

# Contact type

	silver	contacts	(standa	rd)
--	--------	----------	---------	-----

silver contacts with 1 µm gold coating

silver contacts, 2.5 µm gold coating (not for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)



#### Main features

- Metal housing or technopolymer housing, one conduit entry
- Protection degree IP67
- 9 contact blocks available
- 6 stainless steel actuators available
- Versions with assembled M12 connector
- Versions with gold-plated silver contacts
- Strong actuator locking (1000 N)
- Release of the actuator by key

#### Quality marks:



IMQ approval: EG605 UL approval: E131787

ССС approval: 2020970305002282 EAC approval: RU C-IT.AД35.B.00454

#### **Technical data**

#### Housing

FP series housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation:

FD series: metal housing, baked powder coating.

Metal head, baked epoxy powder coating.

One threaded conduit entry: M20x1.5 (standard)
Protection degree: IP67 acc. to EN 60529 with

cable gland of equal or higher protec-

tion degree

#### General data

SIL (SIL CL) up to:

Performance Level (PL) up to:

Interlock with mechanical lock, coded:

Coding level:

SIL 3 acc. to EN 62061

PL e acc. to EN ISO 13849-1

type 2 acc. to EN ISO 14119

low acc. to EN ISO 14119

Safety parameters:

 ${\rm B_{10D}}$ : 1,000,000 for NC contacts Mission time: 20 years

Ambient temperature: -25°C ... +80°C (standard)

 $\begin{array}{ccc} & -40^{\circ}\text{C} \dots +80^{\circ}\text{C} \ (\text{T6 option}) \\ \text{Max. actuation frequency:} & 3600 \ \text{operating cycles/hour} \\ \text{Mechanical endurance:} & 500,000 \ \text{operating cycles} \end{array}$ 

Max. actuation speed: 0.5 m/s
Min. actuation speed: 1 mm/s

Maximum force before breakage  $F_{1max}$  1000 N acc. to EN ISO 14119 Max. holding force  $F_{7k}$ : 770 N acc. to EN ISO 14119

Max. clearance of the actuator: 4.5 mm
Actuator extraction force: 30 N

Tightening torques for installation: see page 379 Wire cross-sections and

wire stripping lengths: see page 399

#### In compliance with standards:

IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, BG-GS-ET-15, UL 508, CSA 22.2 No.14.

#### Approvals:

EN 60947-5-1, UL 508, CSA 22.2 No.14, GB/T14048.5

#### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

# f f not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 377 to 392.

#### **Electrical data** Utilization category Thermal current (I,,): Rated insulation voltage (U): 500 Vac 600 Vdc Alternating current: AC15 (50÷60 Hz) 400 Vac 500 Vdc (contact blocks 20, 21, 22, 28, 29, 30, 33, 34) U (V) 250 400 500 without (A) 6 4 1 Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV 4 kV (contact blocks 20, 21, 22, 28, 29, 30, 33, 34) Direct current: DC13 1000 A acc. to EN 60947-5-1 Conditional short circuit current: 250 U (V) 24 125 type aM fuse 10 A 500 V Protection against short circuits: [ (A) 3 0.3 0.55 Pollution degree: Alternating current: AC15 (50÷60 Hz) with M12 connector, 4 and 5-pole U (V) 24 120 250 Thermal current (I,,): Rated insulation voltage (U.): 250 Vac 300 Vdc (A) 4 type gG fuse 4 A 500 V Protection against short circuits: Direct current: DC13 Pollution degree: 125 250 U (V) 24 (A) 3 0.55 0.3 Alternating current: AC15 (50÷60 Hz) with M12 con-nector, 8-pole Thermal current (I,,): U (V) 24 Rated insulation voltage (U<sub>i</sub>): 30 Vac 36 Vdc (A) 2 Protection against short circuits: type gG fuse 2 A 500 V Direct current: DC13 Pollution degree: U (V) 24 (A)

#### Features approved by IMQ

Rated insulation voltage (Ui):

Conventional free air thermal current (Ith): Protection against short circuits: Rated impulse withstand voltage (U<sub>imp</sub>):

Protection degree of the housing: MV terminals (screw terminals) Pollution degree: Utilization category: Operating voltage (Ue): Operating current (le): 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 33, 34, 37) 10 A type aM fuse 10 A 500 V 6 kV 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34) IP67

3 AC15 400 Vac (50 Hz) 3 A

500 Vac

Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X. Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

#### Features approved by UL

Electrical Ratings: Q300 pilot duty (69 VA, 125-250 V dc)

A600 pilot duty (720 VA, 120-600 V ac)

Environmental Ratings: Types 1, 4X, 12, 13

Use 60 or 75  $^{\circ}$ C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm).

For FP series: the hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.


## **Description**



In these switches, equipped with a sturdy lock, the actuator can be removed from the head only after a complete 180° rotation of the key in the lock. The electrical contacts are switched as the key is turned; the actuator is released only after the NC contacts have been positively opened. Contacts activated by the lock are reset to the initial position only with inserted actuator and with the key in the locking position. It is impossible to rotate the key when the key locking device is unlocked and the actuator is removed (C state). These switches are considered interlocks with guard locking in accordance with ISO 14119, and the product is marked on the side with the symbol shown.




#### Head and release devices with variable orientation



The head can be quickly turned to each of the four sides of the switch by unfastening the two fastening screws.

The auxiliary key release device can be rotated in 90° steps as well. This enables the switch to assume 32 different configurations.

## Adjustment range



The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

# **Protection degree IP67**

IP67 Thestoug

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They


can therefore be used in all environments where maximum protection degree of the housing is required.

# Contact block



Contact blocks with captive screws, finger protection, twin bridge contacts and double interruption for higher contact reliability.

#### Holding force of the unlocked actuator



The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

#### **Extended temperature range**

-40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.


They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

#### Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

# Safety screws for actuators





As required by ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 359.

# Safety switches with separate actuator and key release

#### **Operation**

The switch is fastened to the machine body (A), while the stainless steel actuator is fastened to the guard (B). Once installed, the switch will firmly lock the actuator. To remove the actuator, the lock must be unlocked by turning the key (C). When the actuator is removed, the key cannot be put into the initial position anymore. The example shows how the contacts of the lock and actuator are switched and how the switch can be installed within the machine in such a way that only the release device is visible from the outside.

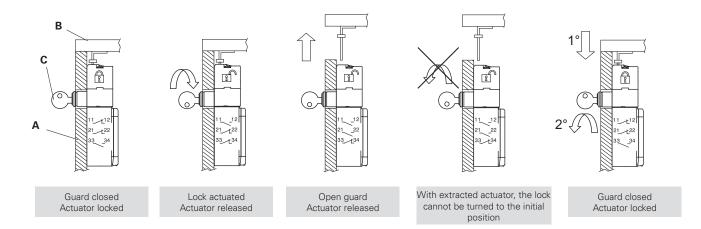

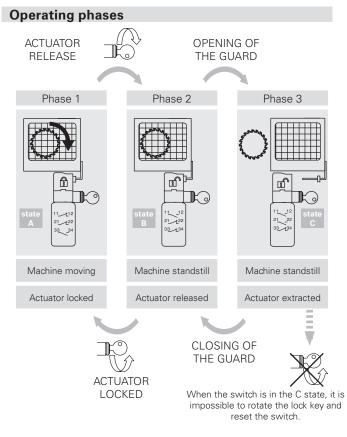

### Limits of use

Do not use where dust and dirt may penetrate in any way into the head and deposit there. Especially not where powder, shavings, concrete or chemicals are sprayed. Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks. Do not use in environments with presence of explosive or flammable gas. In these cases, use ATEX products (see dedicated Pizzato catalogue).


Attention! These switches alone are not suitable for applications where operators may physically enter the dangerous area, because an eventual closing of the door behind them could restart the machine operation. In these cases, the maintenance personnel must use the actuator entry locking device VF KB1 shown on page 120.

# Contact positions related to switch states

	Operating state  Actuator		A	B	C
			Inserted and locked	Inserted and released	Extracted
	Lock		Closed	Open	Open
	Contact blocks				
	FD 1899 1NO+1NC controlled by the lock	<b>∞</b> <b>∞</b>	11— <b>t</b> -12 23— <b>-</b> 24	11 <u>12</u> 12	11 <u>12</u> 12
	FD 2099 1NO+2NC controlled by the lock		11— <b>t</b> -12 21— <b>t</b> -22 33—-34	11 — 12 21 — 22 33 — 34	11 — 12 21 — 22 33 — 34
	FD 2199 3NC controlled by the lock		11— <b>t</b> -12 21— <b>t</b> -22 31— <b>t</b> -32	11 — 12 21 — 22 31 — 32	11 — 12 21 — 22 31 — 32
	FD 2299 2NO+1NC controlled by the lock		11————————————————————————————————————	11 — 12 23 — 24 33 — 34	11 — 12 23 — 24 33 — 34
	FD 2899 1NO+1NC controlled by the lock 1NC controlled by the actuator	> ==== •===	11————————————————————————————————————	11 — 12 21 — 22 33 — 34	11 — 12 21 — 22 33 — 34
	FD 2999 2NC controlled by the lock 1NC controlled by the actuator		11— <b>t</b> <sub>12</sub> 21— <b>t</b> <sub>22</sub> 31— <b>t</b> <sub>32</sub>	11 — 12 21 — 22 31 — 32	11 — 12 21 — 22 31 — 32
	FD 3099 1NC controlled by the lock 2NC controlled by the actuator		11— <b>t</b> -12 21— <b>t</b> -22 31— <b>t</b> -32	11 — 12 21 — 22 31 — 32	11 — 12 21 — 22 31 — 32

The key can be extracted from the lock with locked or released actuator.

6

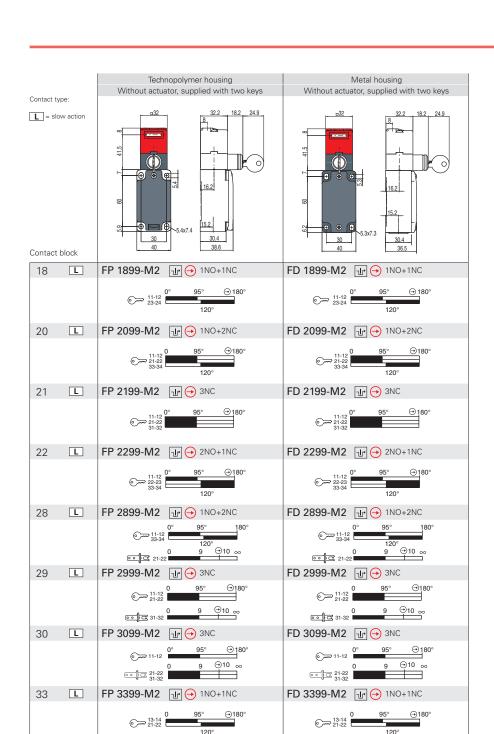


Legend: With positive opening according to EN 60947-5-1, 1 interlock with lock monitoring acc. to EN ISO 14119

## How to read travel diagrams

Actuating force

**L FP 3499-M2 →** 2NC

All values in the diagrams are in mm or in degrees

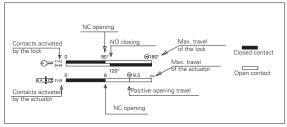

0 95° ⊕180° 0 21-22

30 N (40 N 🕣)

#### IMPORTANT:

30 N (40 N →)

FD 3499-M2 → 2NC

The state of the NC contact ( ) refers to the switch with inserted actuator and locked lock. In safety applications, actuate the switch at least up to the positive opening travel shown in the travel diagrams with symbol ). Actuate the switch at least with the positive opening force, reported in brackets below each article, next to the actuating force value.

All values in the drawings are in mm


Accessories See page 359


→ The 2D and 3D files are available at www.pizzato.com


# Safety switches with separate actuator and key release

#### Stainless steel actuators


**IMPORTANT:** These actuators can be used only with items of the FD, FP, FL, FC, and FS series (e.g. FD 1899-M2). Low level of coding acc. to EN ISO 14119.

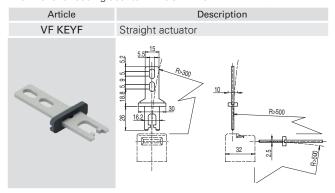

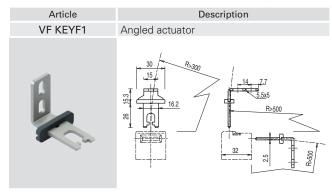


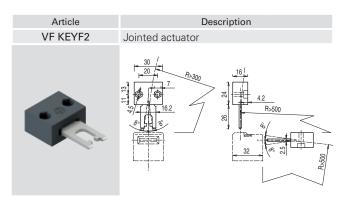

The actuator can flex in four directions for applications where the guard alignment is not precise.

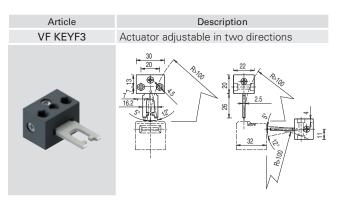

Actuator adjustable in two directions for guards with reduced dimensions.

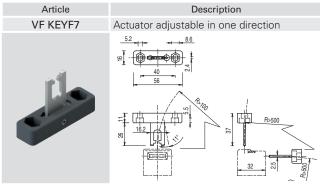


Actuator adjustable in one direction for guards with reduced dimensions.





#### **Universal actuator VF KEYF8**


**IMPORTANT:** These actuators can be used only with items of the FD, FP, FL, FC, and FS series (e.g. FD 1899-M2). Low level of coding acc. to EN ISO 14119.


Article	Description
VF KEYF8	Universal actuator
	39 39 42 48 61 62 88 61 62 88 61 62 63 64 64 64 64 64 64 64 64 64 64




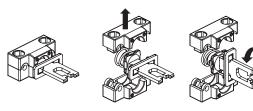


















### Accessories

Article VF KB1	Description Lock out device	
	Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area. Hole diameter for padlocks: 9 mm.	

Article VF KLA371	

Set of two locking keys

Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.

Description