


Single-Ended Cordsets
BCC W314-0000-10-003-SW0434-050
Order Code: BCC0J02

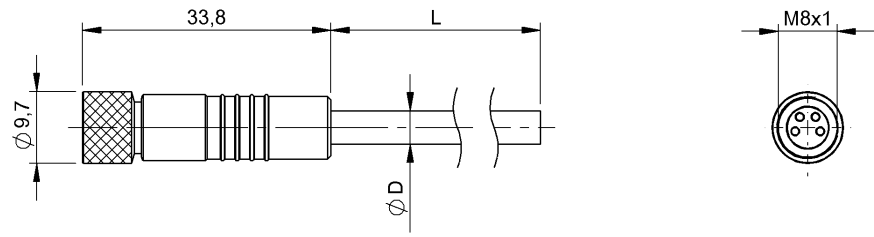

Basic features

Application	Welding area
Approval/Conformity	CE cULus WEEE

Electrical connection

Bending radius min., fixed cable	10 x D
Bending radius min., flexible cable	15 x D
Cable	Silicone welding spark resistant black, 5 m
Cable diameter D	5.70 mm ±0.25 mm
Conductor cross-section	0.34 mm²
Connection	M8x1-Female, straight, 4-pin, A- coded
Connector configuration	Straight
Number of conductors	4
Number of pins	4
System	Molded

Electrical data

Operating voltage Ub	60 VDC / 60 VAC
Rated current (40 °C)	4.0 A

Remarks

Cable construction acc. to UL-AWM Style 4535
Halogen-free per IEC 60754
Maximum temperature at outer jacket from weld spatter/beads short-time 800°C.
Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Environmental conditions

Cable temperature UL max., fixed routing	150 °C
Cable temperature UL max., flexible routing	150 °C
Cable temperature, fixed routing	-40...200 °C
Cable temperature, flexible routing	-25...200 °C
IP rating	IP65


Material

Cable jacket material, note	welding spark resistant
Cable jacket, material	Silicone
Material contact carrier	PUR, special
Material contacts	Bronze
Material cover nut	Brass PTFE coated
Material grip	PUR, special

Mechanical data

Cable jacket, color	black
Cable length L	5.00 m
Tightening torque pigtail	0.4 Nm

Connector Drawings



PIN 1: brown
PIN 2: white
PIN 3: blue
PIN 4: black

Wiring Diagrams

