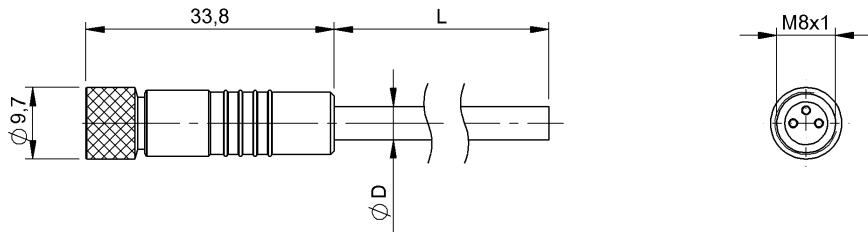


Single-Ended Cordsets

BCC W313-0000-10-004-TW0334-020

Order Code: BCC0KA3

BALLUFF

Basic features

Application	Welding area
Approval/Conformity	CE cULus WEEE

Display/Operation

Function indicator (Pin 4)	LED yellow
Power indicator	Green LED

Electrical connection

Bending radius min., fixed cable	7.5 x D
Bending radius min., flexible cable	15 x D
Cable	FEP welding spark resistant black, 2 m
Cable diameter D	3.75 mm ±0.25 mm
Conductor cross-section	0.34 mm ²
Connection	M8x1-Female, straight, 3-pin, A-coded
Connector configuration	Straight
Number of conductors	3
Number of pins	3
System	Molded

Electrical data

Operating voltage Ub	30 VDC
Rated current (40 °C)	4.0 A

Environmental conditions

Cable temperature, fixed routing	-100...200 °C
Connector 01, temperature max.	100 °C
IP rating	IP65

Material

Cable jacket material, note	welding spark resistant
Cable jacket, material	FEP
Material contact carrier	PUR, special
Material contacts	Bronze
Material cover nut	Brass
Material grip	PTFE coated
	PUR, special

Mechanical data

Cable jacket, color	black
Cable length L	2.00 m
Tightening torque pigtail	0.4 Nm

Remarks


Cable construction acc. to UL-AWM Style 2749

Maximum temperature at outer jacket from weld spatter/beads short-time 800°C.

Flame-retarding

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings




PIN 1: brown

PIN 3: blue

PIN 4: black

Wiring Diagrams

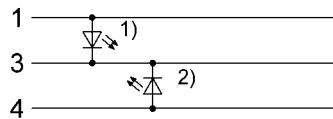

1) Green LED = Power

2) Yellow LED = Function