




1) Sensing surface

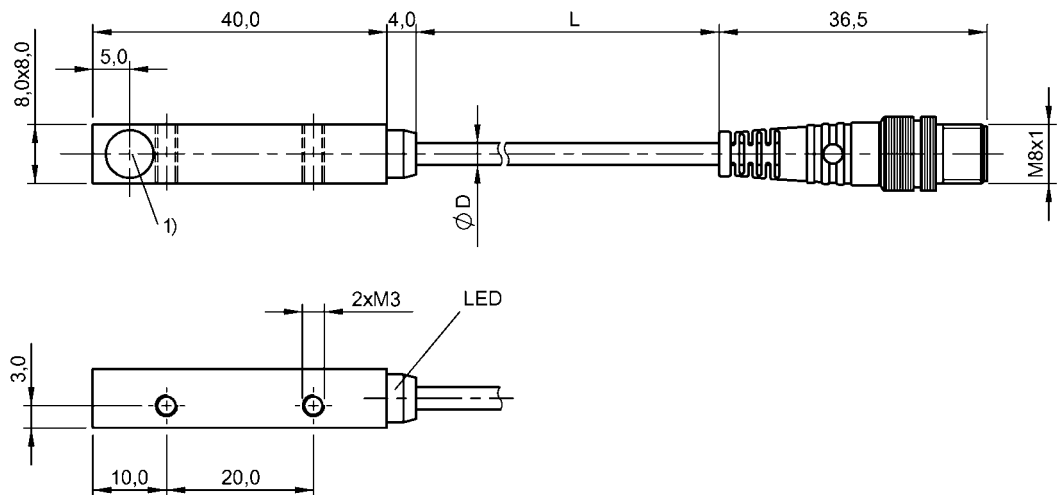

#### Basic features

|                     |                             |
|---------------------|-----------------------------|
| Approval/Conformity | cULus<br>CE<br>UKCA<br>WEEE |
| Basic standard      | IEC 60947-5-2               |

#### Display/Operation

|                    |     |
|--------------------|-----|
| Function indicator | yes |
| Power indicator    | no  |

#### Electrical connection

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Cable diameter D                  | 3.00 mm                           |
| Cable length L                    | 0.3 m                             |
| Conductor cross-section           | 0.14 mm <sup>2</sup>              |
| Connection                        | M8x1-Male, 3-pin                  |
| Connection type                   | Cable with connector, 0.30 m, TPE |
| Number of conductors              | 3                                 |
| Polarity reversal protected       | yes                               |
| Protection against device mix-ups | yes                               |
| Short-circuit protection          | yes                               |

#### Electrical data

|                                               |               |
|-----------------------------------------------|---------------|
| Load capacitance max. at U <sub>e</sub>       | 0.5 µF        |
| Min. operating current I <sub>m</sub>         | 0 mA          |
| No-load current I <sub>o</sub> max., damped   | 12 mA         |
| No-load current I <sub>o</sub> max., undamped | 8 mA          |
| Operating voltage U <sub>b</sub>              | 10...30 VDC   |
| Output resistance R <sub>a</sub>              | 33.0 kOhm + D |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC       |
| Rated operating current I <sub>e</sub>        | 200 mA        |
| Rated operating voltage U <sub>e</sub> DC     | 24 V          |
| Rated short circuit current                   | 100 A         |
| Ready delay t <sub>v</sub> max.               | 10 ms         |
| Residual current I <sub>r</sub> max.          | 20 µA         |
| Ripple max. (% of U <sub>e</sub> )            | 15 %          |
| Switching frequency                           | 1000 Hz       |
| Utilization category                          | DC -13        |
| Voltage drop static max.                      | 2.5 V         |

#### Environmental conditions

|                         |                                       |
|-------------------------|---------------------------------------|
| Ambient temperature     | -25...70 °C                           |
| Contamination scale     | 3                                     |
| EN 60068-2-27, Shock    | Half-sinus, 30 g <sub>n</sub> , 11 ms |
| EN 60068-2-6, Vibration | 55 Hz, amplitude 1 mm, 3x30 min       |
| IP rating               | IP67                                  |

#### Functional safety

|              |       |
|--------------|-------|
| MTTF (40 °C) | 730 a |
|--------------|-------|

Inductive Sensors  
BES Q08ZC-PSC30B-EZ00,3-GS49-519  
Order Code: BES055A



Interface

Switching output                      PNP normally open (NO)

Material

Housing material                      Zinc, Die casting, coated  
Material jacket                        TPE, Flame-resistant  
Material sensing surface              PBT, coated

Mechanical data

Dimension                                40 x 8 x 8 mm  
Installation                               for flush mounting  
Size                                         8x8

Range/Distance

Assured operating distance Sa              2.4 mm  
Hysteresis H max. (% of Sr)                15.0 %  
Rated operating distance Sn                3 mm  
Real switching distance sr                  3 mm  
Repeat accuracy max. (% of Sr)            5.0 %  
Switching distance marking                ■■  
Temperature drift max. (% of Sr)           10 %  
Tolerance Sr                                 ±10 %

Remarks

The sensor is functional again after the overload has been eliminated.  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

