

## IB08010H

### Inductive sensors • Increased switching distance

sensor inductive, M8x1 45long, Quasi-flat, Sn: 4, 10-30V DC, PNP NO, Cable 2m PVC, IP67, Nickel silver Chrome-plated

including 2x Nut, 2x Toothed washer



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	10%
Correction factor (aluminum)	0.2
Correction factor (copper)	0.22
Correction factor (brass)	0.35
Correction factor (St37)	1
Correction factor (stainl. steel)	0.65
Short-circuit protection	Yes
No-load current	10mA
Line diameter	3.5mm
Relative repeat accuracy	5%
Switching distance	4mm
Switching frequency	500Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

## Mechanical features

Number of cores	3
Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	45mm
Thread pitch	1mm
Cable length	2m
Cable infeed	axial
Length	45mm
Mechanical mounting condition for sensor	semi-flush
Surface	Chrome-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBTP)
Housing material	Nickel silver
Material of cable sheath	Plastic (PVC)
Thread dimension	M8
Ambient temperature	-25 - 70°C

## Other features

Reference medium / object	Standard measuring plate FE360 16x16x1mm
Ambient temperature	-25 - 70°C


## Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

## More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	210 x 180 x 10 mm
gross weight	55 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

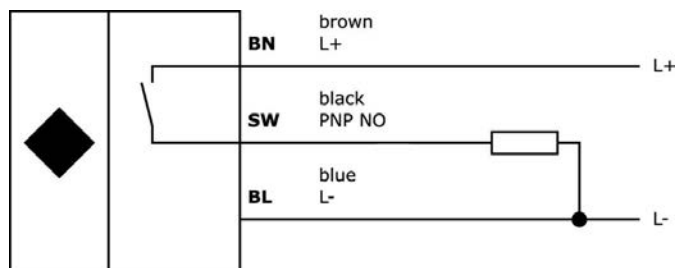

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

**Dimensional drawing**