

IB12010H

Inductive sensors • Increased switching distance

sensor inductive, M12x1 50long, Quasi-flat, Sn: 8, 10-30V DC, PNP NO, Cable 2m PVC, IP67, Brass Chrome-plated

including 2x Nut, 2x Toothed washer



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	10%
Correction factor (aluminum)	0.2
Correction factor (copper)	0.23
Correction factor (brass)	0.36
Correction factor (St37)	1
Correction factor (stainl. steel)	0.67
Short-circuit protection	Yes
No-load current	10mA
Line diameter	5mm
Relative repeat accuracy	5%
Switching distance	8mm
Switching frequency	400Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Number of cores	3
Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	50mm
Thread pitch	1mm
Cable length	2m
Cable infeed	axial
Length	50mm
Maximum tightening torque	6Nm
Mechanical mounting condition for sensor	semi-flush
Surface	Chrome-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBTP)
Housing material	Brass
Material of cable sheath	Plastic (PVC)
Thread dimension	M12
Ambient temperature	-25 - 70°C

Other features

Reference medium / object	Standard measuring plate FE360 32x32x1mm
Ambient temperature	-25 - 70°C


Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	123 x 77 x 25 mm
gross weight	110 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

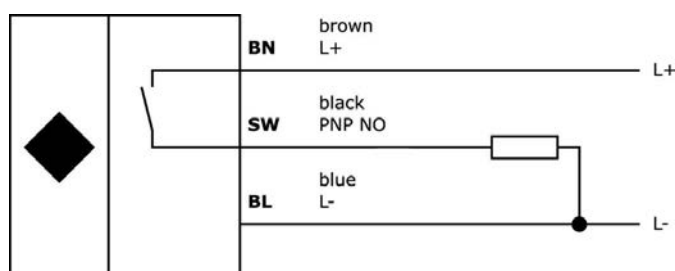

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

