

AbN automation

# IN080184

# Inductive sensors • Norm switching distance

sensor inductive, M8x1 30long, Non-flush, Sn: 4, 10-30V DC, PNP NO, Connector M8, IP68, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

### **Electrical features**

Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	15%
Short-circuit protection	Yes
No-load current	10mA
Relative repeat accuracy	5%
Switching distance	4mm
Switching frequency	1500Hz
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

## **Mechanical features**

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable infeed	axial
Length	30mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP68
Active area material of sensor	Plastic (PBT)
Housing material	Stainless steel 1.4305
Thread dimension	M8
Ambient temperature	-25 - 70°C



#### Other features

Reference medium / object	Standard measuring plate FE360 8x8x1mm
Ambient temperature	-25 - 70°C


#### Classification

ETIM 8	EC002714 Inductive proximity switch
	• • • • • • • • • • • • • • • • • • • •

#### More

IPF Product Group	200 inductive sensors
packaging dimensions	120 x 100 x 17 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

#### Connection

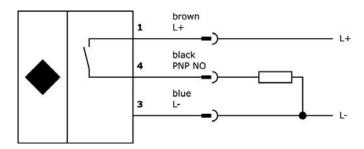

Installation Disposal



Mounting / installation may only be carried out by a qualified electrician!



### Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.