

IN08E099

Inductive sensors • Increased switching distance

sensor inductive, M8x1 46long, Non-flush, Sn: 6, 6-36V DC, PNP NO, Connector M8 3pin, IP67, Chromium-nickel steel, Static

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Response/decay time	1.25ms
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	100mA
Relative hysteresis	20%
Correction factor (aluminum)	0.5
Correction factor (St37)	1
Correction factor (stainl. steel)	0.8
Short-circuit protection	Yes
No-load current	12mA
Number of pins	3
Relative repeat accuracy	1%
Switching distance	6mm
Switching frequency	400Hz
Switching behavior of the output	Static
Voltage drop	2V
Reverse polarity protection	Yes
Decay time	1.25ms
Operating voltage (DC)	6 - 36V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	30mm
Thread pitch	1mm
Cable infeed	axial
Length	46mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBT)
Housing material	Stainless steel
Thread dimension	M8
Ambient temperature	-25 - 75°C

Other features

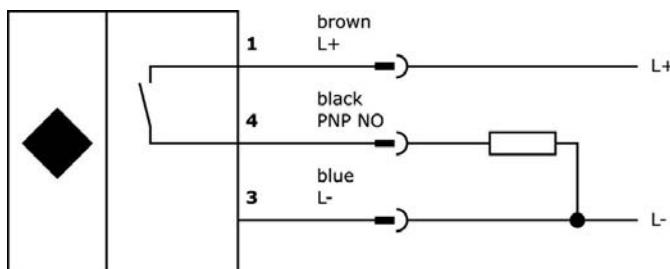
Ambient temperature	-25 - 75°C
---------------------	------------

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	120 x 100 x 12 mm
gross weight	16 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing