

## INR40106

### Inductive sensors • Increased switching distance

sensor inductive, Ø4mm 35long, Non-flush, Sn: 5, 10-30V DC, PNP NO, Cable 2m PUR (Polyurethane), IP67, Stainless steel 1.4305



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	100mA
Short-circuit protection	Yes
No-load current	10mA
Line diameter	3mm
Switching distance	5mm
Switching frequency	3000Hz
Voltage drop	2.5V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

#### Mechanical features

Alignment of cable entry	axial
Design	Cylinder plain
Diameter	4mm
Cable length	2m
Cable infeed	axial
Length	35mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PET)
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PUR)
Ambient temperature	-25 - 70°C

## Other features

Ambient temperature	-25 - 70°C
---------------------	------------


## Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

## More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	123 x 77 x 25 mm
gross weight	50 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

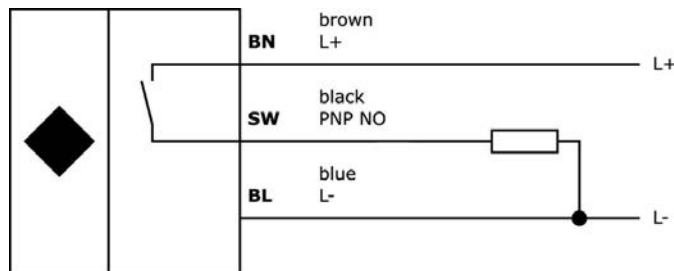

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).