

## PE991413

### Laser sensors • Through-beam sensors receivers

sensor laser, Through-beam sensor receiver, 94x50x34mm, aperture 30x0.5mm, Sn: 5m, 12-32V DC, PNP/NPN Push-pull, 0-10V, Connector M12 4pin, IP65, Aluminum+Glass, Laser diode, red light



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

#### Electrical features

Display	LED display
Resolution	0.15mm
Type of switching function	Schließer (NO bei PNP) Öffner (NC bei NPN)
Type of analog output	0 - 10V
Type of electrical connection	Connector M12
Type of switching output	PNP/NPN
Rated switching current	100mA
Setting procedure	Parameterization   Teach-In
Short-circuit protection	Yes
No-load current	30mA
No-load current, receiver	30mA
Number of pins	4
Switching distance	0 - 5000mm
Switching frequency	25000Hz
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Absolute repeat accuracy	0.015mm
Operating voltage (DC)	12 - 32V
Measurement frequency	300Hz

**Mechanical features**

Design	Cuboid
Width	34mm
Height	94mm
Storage temperature	85°C
Length	50mm
Degree of protection (IP)	IP65
Volume	Large
Active area material of sensor	glass
Housing material	Aluminum
Ambient temperature	-20 - 50°C

**Optical features**

Aperture width	0.5mm
Aperture length	30mm
Filter	Interference / polarizing filter
Light source	Laser diode, red light
Light beam form	Line
Wavelength of the sensor	670nm

**Other features**

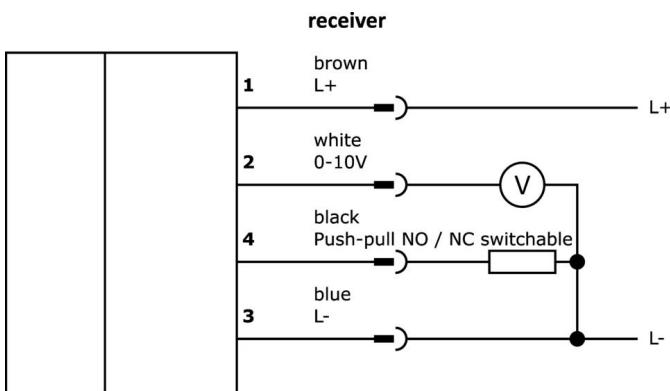
Scope of delivery	Receiver
Ambient temperature	-20 - 50°C
Version	Through-beam sensor receiver

**Classification**

ETIM 8	EC002716 Through-beam photoelectric sensor
--------	--

**More**

IPF Product Group	705 special devices (SI)
packaging dimensions	160 x 99 x 60 mm
gross weight	310 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).