



Product designation	Power contactor		
Product type designation	B180		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	275
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	275
	AC-1 ($\leq 55^\circ C$)	A	250
	AC-1 ($\leq 70^\circ C$)	A	200
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	185
	AC-4 (400V)	A	65
Rated operational power AC-3 ($T \leq 55^\circ C$)	400V	kW	100
Rated operational power AC-1 ($T \leq 40^\circ C$)	230V	kW	95
	400V	kW	160
	500V	kW	213
	690V	kW	298
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series	75V	A	260
	110V	A	120
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series	75V	A	260
	110V	A	170
	220V	A	150
	330V	A	—
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series	75V	A	260
	110V	A	170
	220V	A	170
	330V	A	150
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 4 poles in series	75V	A	260
	110V	A	170
	220V	A	170

	330V	A	170
	460V	A	150
IEC max current I_e in DC3-DC5 with $L/R \leq 15ms$ with 1 poles in series			
	75V	A	180
	110V	A	90
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15ms$ with 2 poles in series			
	75V	A	180
	110V	A	140
	220V	A	100
	330V	A	—
	460V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15ms$ with 3 poles in series			
	75V	A	180
	110V	A	160
	220V	A	140
	330V	A	100
	460V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15ms$ with 4 poles in series			
	75V	A	180
	110V	A	160
	220V	A	160
	330V	A	160
	460V	A	100
Short-time allowable current for 10s (IEC/EN60947-1)			A 1500
Protection fuse			
	gG (IEC)	A	315
	aM (IEC)	A	200
Making capacity (RMS value)			A 1850
Breaking capacity at voltage			
	440V	A	1850
	500V	A	1600
	690V	A	1480
Resistance per pole (average value)			m? 0.3
Power dissipation per pole (average value)			
	I _{th}	W	20.3
	AC3	W	9.7
Tightening torque for terminals			
	min	Nm	18
	max	Nm	18
	min	lbin	13.3
	max	lbin	13.3
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1
	min	lbin	0.74
	max	lbin	0.74
Max number of wires simultaneously connectable			Nr. 2
Conductor section			
	AWG/Kcmil	max	300 kcmil

Power terminal protection according to IEC/EN 60529	IP00					
Mechanical features						
Operating position						
	normal allowable		Vertical plan ±30°			
Fixing			Screw			
Weight		g	6120			
Conductor section						
AWG/kcmil conductor section		max	300 kcmil			
Operations						
Mechanical life		cycles	10000000			
Electrical life		cycles	1000000			
Safety related data						
Performance level B10d according to EN/ISO 13489-1						
	rated load	cycles	1000000			
	mechanical load	cycles	10000000			
Mirror contacts according to IEC/EN 609474-4-1			yes			
EMC compatibility			yes			
AC coil operating						
Rated AC voltage at 50/60Hz, 60Hz		min	V			
		max	V			
			220			
			240			
AC operating voltage						
of 50/60Hz coil powered at 50Hz						
pick-up		min	%Us			
		max	%Us			
			80			
			110			
drop-out						
		min	%Us			
		max	%Us			
			20			
			60			
of 50/60Hz coil powered at 60Hz						
pick-up		min	%Us			
		max	%Us			
			80			
			110			
drop-out						
		min	%Us			
		max	%Us			
			20			
			60			
of 60Hz coil powered at 60Hz						
pick-up		min	%Us			
		max	%Us			
			80			
			110			
drop-out						
		min	%Us			
		max	%Us			
			20			
			60			
AC average coil consumption at 20°C						
of 50/60Hz coil powered at 50Hz		in-rush	VA			
		holding	VA			
			300			
			10			
of 50/60Hz coil powered at 60Hz		in-rush	VA			
		holding	VA			
			300			
			10			
Dissipation at holding ≤20°C 50Hz		W	10			

DC coil operating

DC rated control voltage

min	V	220
max	V	240

DC operating voltage

pick-up

min	%Us	80
max	%Us	110

drop-out

min	%Us	20
max	%Us	60

 Average coil consumption $\leq 20^{\circ}\text{C}$

in-rush	W	300
holding	W	10

Max cycles frequency

Mechanical operation

cycles/h 2400

Operating times

Average time for Us control

in AC

Closing NO

min	ms	60
max	ms	100

Opening NO

min	ms	25
max	ms	60

in DC

Closing NO

min	ms	60
max	ms	100

Opening NO

min	ms	25
max	ms	60

UL technical data

Full-load current (FLA) for three-phase AC motor

at 480V	A	180
at 600V	A	144

Yielded mechanical performance

for three-phase AC motor

200/208V	HP	60
220/230V	HP	75
460/480V	HP	150
575/600V	HP	150

General USE

Contactor

AC current	A	275
------------	---	-----

Short-circuit protection fuse, 600V

Standard fault

Short circuit current	kA	10
Fuse rating	A	500
Fuse class		RK5


Ambient conditions

Temperature

Operating temperature


min	°C	-50
-----	----	-----

	max	°C	70
Storage temperature	min	°C	-60
	max	°C	80
Max altitude	m		3000
Resistance & Protection			
Pollution degree			3
Dimensions			

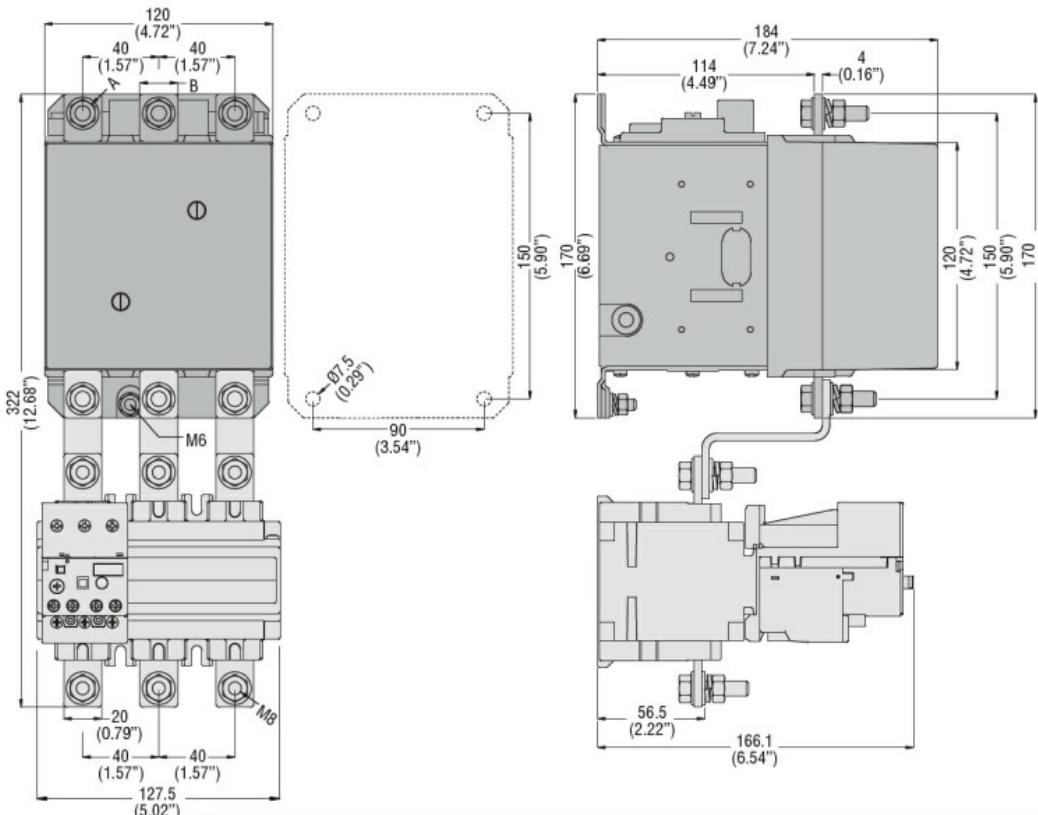

CONTACTOR TYPE	A	B
B115	M6	15 (0.59")
B145	M8	20 (0.79")
B180	M8	20 (0.79")

Wiring diagrams

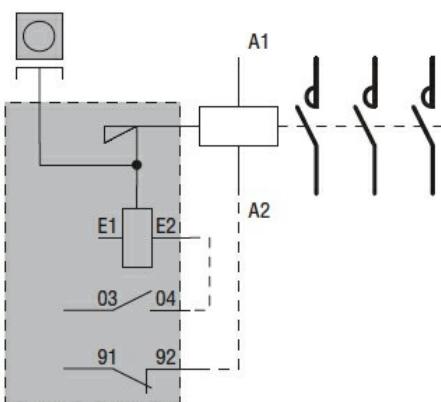

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching