



Product designation

Power contactor

Product type designation

BGF09

Contact characteristics

Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min max	Hz Hz 25 400
IEC Conventional free air thermal current I_{th}	A	20
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$) AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) AC-4 (400V)	A A A 20 9 4
Rated operational power AC-3 ($T \leq 55^\circ\text{C}$)	230V 400V 415V 440V 500V 690V	kW kW kW kW kW kW 2.2 4 4.3 4.5 5 5
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V 400V 500V 690V	kW kW kW kW 8 14 16 22
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	$\leq 24\text{V}$ 48V 75V 110V 220V	A A A A A 12 10 4 3 —
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	$\leq 24\text{V}$ 48V 75V 110V 220V	A A A A A 15 14 9 8 —
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	$\leq 24\text{V}$ 48V 75V 110V 220V	A A A A A 16 16 10 10 2
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series		

	≤24V	A	16
	48V	A	16
	75V	A	10
	110V	A	10
	220V	A	2
IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	≤24V	A	7
	48V	A	6
	75V	A	2
	110V	A	1
	220V	A	–
IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	≤24V	A	8
	48V	A	8
	75V	A	5
	110V	A	4
	220V	A	–
IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	≤24V	A	10
	48V	A	10
	75V	A	6
	110V	A	5
	220V	A	0,8
IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	≤24V	A	10
	48V	A	10
	75V	A	6
	110V	A	5
	220V	A	0,8
Short-time allowable current for 10s (IEC/EN60947-1)		A	96
Protection fuse			
	gG (IEC)	A	20
	aM (IEC)	A	10
Making capacity (RMS value)		A	92
Breaking capacity at voltage			
	440V	A	72
	500V	A	72
	690V	A	72
Resistance per pole (average value)		mΩ	10
Power dissipation per pole (average value)			
	I _{th}	W	4
	AC3	W	0.81
Tightening torque for terminals			
	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Max number of wires simultaneously connectable		Nr.	2

Conductor section	AWG/Kcmil			max		12
Flexible w/o lug conductor section				min	mm ²	0.75
				max	mm ²	2.5
Flexible c/w lug conductor section				min	mm ²	1.5
				max	mm ²	2.5
Flexible with insulated spade lug conductor section				min	mm ²	1.5
				max	mm ²	2.5
Power terminal protection according to IEC/EN 60529						IP20 when wired
Mechanical features						
Operating position				normal allowable	Vertical plan ±30°	
Fixing				Screw / DIN rail 35mm		
Weight					g	224
Conductor section	AWG/kcmil conductor section			max		12
Auxiliary contact characteristics						
Thermal current I _{th}					A	10
IEC/EN 60947-5-1 designation				A600 - Q600		
Operating current AC15				230V	A	3
				400V	A	1.9
				500V	A	1.4
Operating current DC12				110V	A	2.9
Operating current DC13				24V	A	2.9
				48V	A	1.4
				60V	A	1.1
				125V	A	0.3
				220V	A	0.1
				600V	A	0.6
Operations						
Mechanical life				cycles	20000000	
Electrical life				cycles	500000	
Safety related data						
Performance level B10d according to EN/ISO 13489-1				rated load	cycles	500000
				mechanical load	cycles	20000000
Mirror contacts according to IEC/EN 60947-4-1				yes		
EMC compatibility				yes		
DC coil operating						
DC rated control voltage					V	125
DC operating voltage	pick-up			min	%U _s	75

drop-out	max	%Us	115
	min	%Us	10
	max	%Us	25

Average coil consumption $\leq 20^{\circ}\text{C}$

in-rush	W	3.2
holding	W	3.2

Max cycles frequency

Mechanical operation	cycles/h	3600
----------------------	----------	------

Operating times

Average time for Us control

in AC

Closing NO

min	ms	12
max	ms	21

Opening NO

min	ms	9
max	ms	18

Closing NC

min	ms	17
max	ms	26

Opening NC

min	ms	7
max	ms	17

in DC

Closing NO

min	ms	18
max	ms	25

Opening NO

min	ms	2
max	ms	3

Closing NC

min	ms	3
max	ms	5

Opening NC

min	ms	11
max	ms	17

UL technical data

Full-load current (FLA) for three-phase AC motor

at 480V	A	7.6
at 600V	A	6.1

Yielded mechanical performance

for single-phase AC motor

110/120V	HP	0.5
230V	HP	1.5

for three-phase AC motor

200/208V	HP	2
220/230V	HP	3
460/480V	HP	5
575/600V	HP	5

General USE

Contactor

AC current	A	20
------------	---	----

Short-circuit protection fuse, 600V

High fault

Short circuit current	kA	100
Fuse rating	A	30
Fuse class		J

Standard fault

Short circuit current	kA	5
Fuse rating	A	30

Contact rating of auxiliary contacts according to UL

A600 - Q600

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	+70

Storage temperature

min	°C	-60
max	°C	+80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

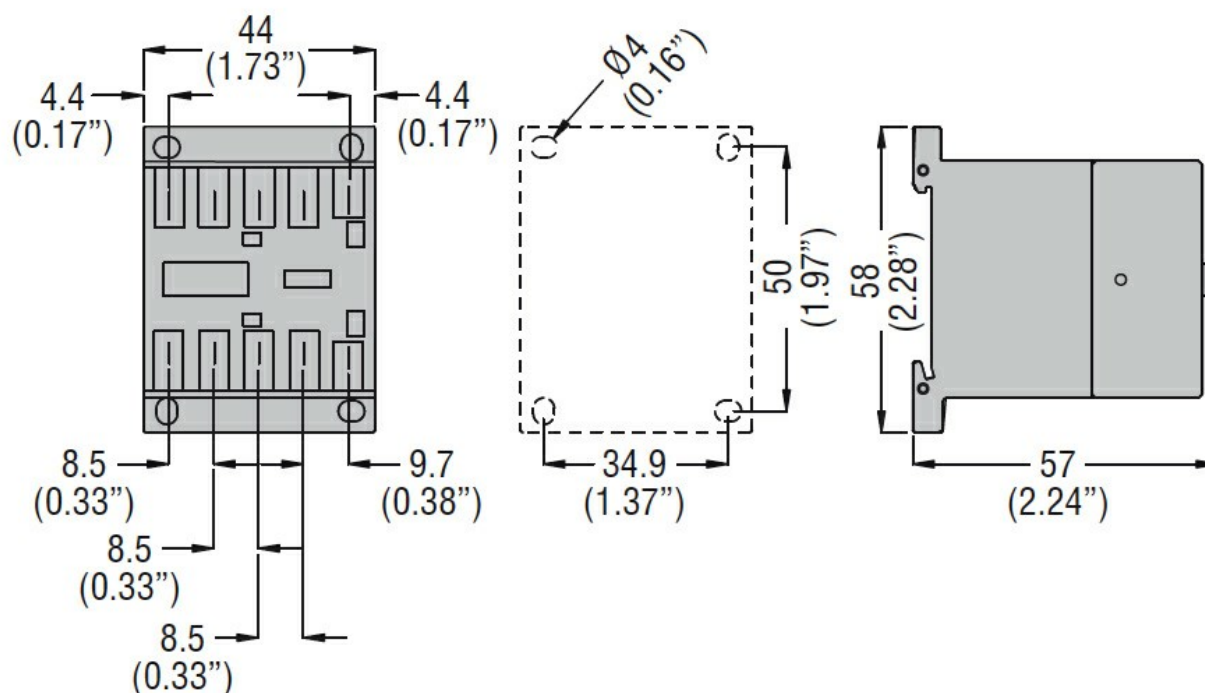

Wiring diagrams

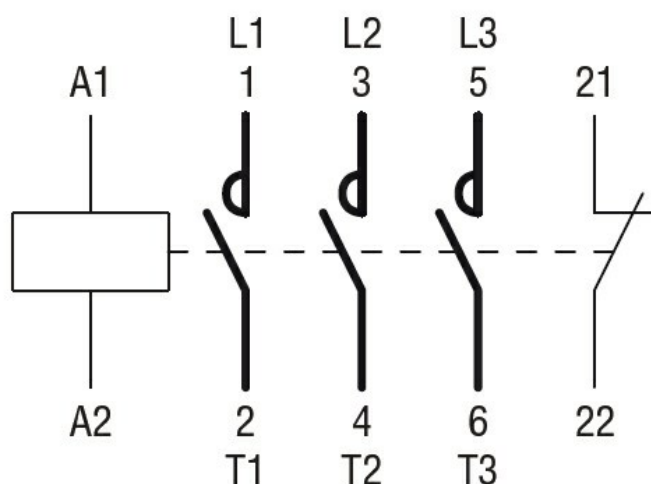

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching