



Product designation
Product type designation

Power contactor
BFK150

Contact characteristics

Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min Hz	25
	max Hz	400
IEC Conventional free air thermal current I_{th}	A	165
Rated operational power AC-6b ($T \leq 40^\circ C$)	230V kvar	50
	400V kvar	100
	440...480V kvar	115
	690V kvar	150
Short-time allowable current for 10s (IEC/EN60947-1)	A	1200
Protection fuse	gG (IEC)	A 160
Making capacity (RMS value)	A	1500
Breaking capacity at voltage	440V A	1200
	500V A	1025
	690V A	905
Resistance per pole (average value)	m Ω	0.45
Power dissipation per pole (average value)	I_{th} W	12
Tightening torque for terminals	min Nm	6
	max Nm	7
	min lbin	4.4
	max lbin	5.2
Tightening torque for coil terminal	min Nm	0.8
	max Nm	1
	min lbin	0.59
	max lbin	0.74
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	
	max	2/0
Flexible w/o lug conductor section	min mm ²	1.5
	max mm ²	70
Flexible c/w lug conductor section	min mm ²	1.5

	max	mm ²	70
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			
Operating position			
	normal allowable		Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight		g	2095
Conductor section			
AWG/kcmil conductor section			
	max		2/0
Operations			
Mechanical life		cycles	15000000
Electrical life		cycles	800000
Safety related data			
Performance level B10d according to EN/ISO 13489-1			
	rated load	cycles	400000
	mechanical load	cycles	15000000
EMC compatibility			yes
AC coil operating			
Rated AC voltage at 50/60Hz		V	230
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up		min	%Us 80
		max	%Us 110
drop-out			
		min	%Us 20
		max	%Us 55
of 50/60Hz coil powered at 60Hz			
pick-up		min	%Us 85
		max	%Us 110
drop-out			
		min	%Us 40
		max	%Us 55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz			
		in-rush	VA 300
		holding	VA 20
of 50/60Hz coil powered at 60Hz			
		in-rush	VA 300
		holding	VA 17
of 60Hz coil powered at 60Hz			
		in-rush	VA 300
		holding	VA 20
Dissipation at holding ≤20°C 50Hz		W	6.5
Max cycles frequency			
Mechanical operation		cycles/h	1500
Operating times			
Average time for Us control			
in AC			
Closing NO			

Opening NO	min	ms	16
	max	ms	32
	min	ms	9
	max	ms	24

UL technical data

General USE

Contactor

AC current A 165

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	70

Storage temperature

min	°C	-60
max	°C	80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

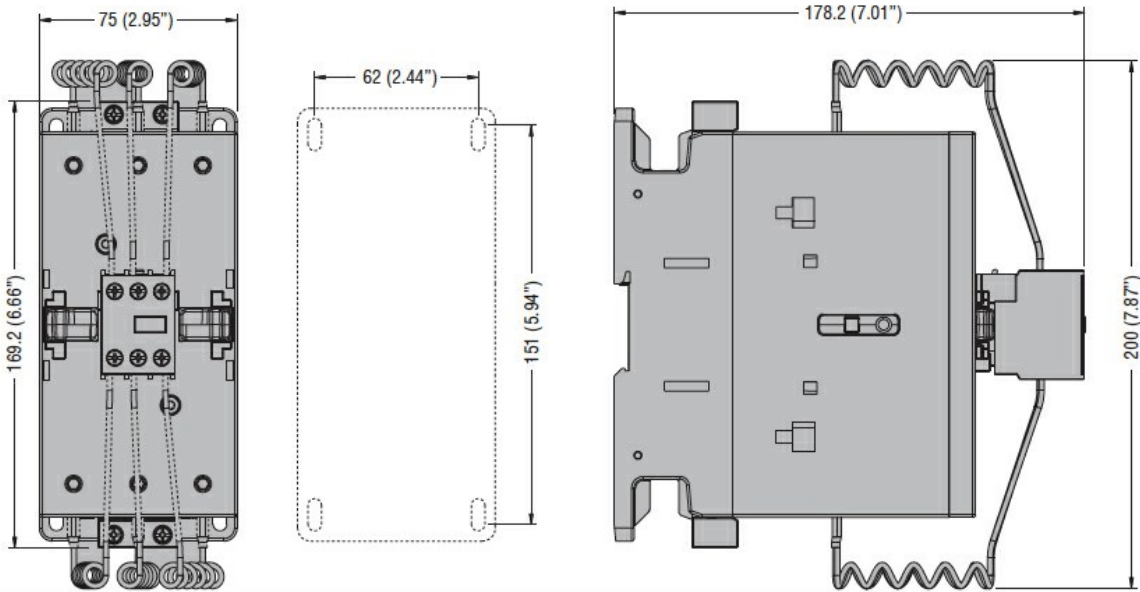

Wiring diagrams

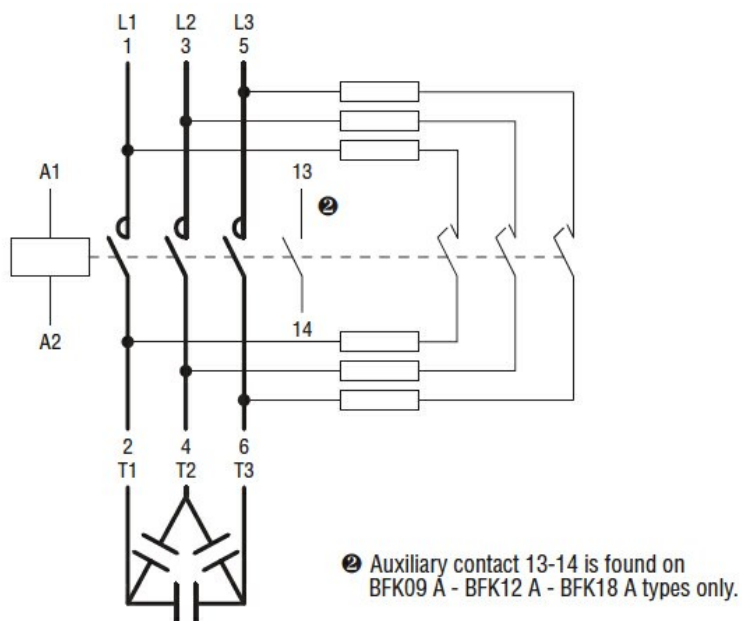

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC001079 -
Capacitor
contactor