



Key operated
KCN

Product designation

Product type designation

General characteristics

Material

Housing

Polymer
thermoplastic
Angled "T"

Key shape

Contact characteristics

Type of contact

2NC Slow action

Thermal current I_{th}

A

10

IEC/EN 60947-5-1 designation

A600 Q600

Rated insulation voltage U_i

V

690

Rated impulse withstand voltage U_{imp}

kV

6

Insulation class

II

Short-circuit protection with fuse

Class/A

10 gG/SC
QUICK FUSE

Switching speed

min
max

m/s
m/s

0.5
1.5

IEC Conventional free air thermal current I_{th}

A

10

Resistance per pole (average value)

m?

<10

Mechanical features

Operating head fixing

Locking bayonet
insert

Operating torque

N
lb

8
1.8

Tightening torque (Max)

Switch fixing

Nm
lbin

2.5
22.1

Contact terminals

Nm
lbin

0.8
7

Body lid screw fixing

Nm
lbin

0.8
7

Conductor section

AWG/Kcmil

min
max

16
14

IEC

min
max

mm²
mm²

1or 2
2.5

Cable connection

Self-releasing
screw terminal

Cable entry	M20 on the sides	
Weight	g	107

Operations

Mechanical life	cycles	100000
B10d	cycles	100000
Mechanical operation	cycles/h	3600

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+70


Resistance & Protection

IP degree

Terminals	IP20
Body housing	IP65


Pollution degree	3
------------------	---

Dimensions

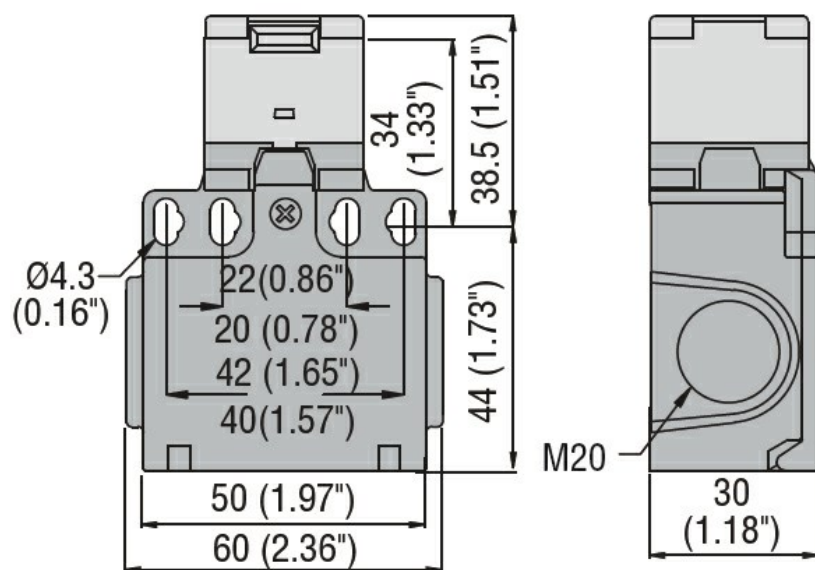

Wiring diagrams

Slow action

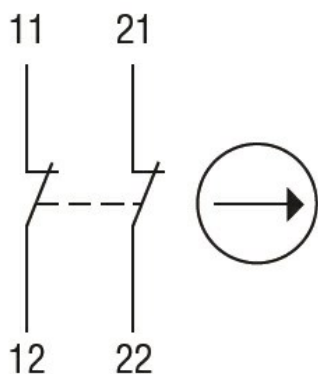

2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch