



Hinge operating
KCP

Product designation

Product type designation

General characteristics

Material

Housing

Rod

Polymer
thermoplastic
Long solid

Contact characteristics

Type of contact		2NC Slow action
Thermal current Ith	A	10
IEC/EN 60947-5-1 designation		A600 Q300
Rated insulation voltage Ui	V	690
Rated impulse withstand voltage Uimp	kV	6
Insulation class		II
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE

Switching speed

min	m/s	0.5
max	m/s	1.5

IEC Conventional free air thermal current Ith	A	10
Resistance per pole (average value)	m?	<10

Mechanical features

Operating head fixing		Locking bayonet insert
-----------------------	--	---------------------------

Operating torque

Ncm	15
ozin	21.2

Tightening torque (Max)

Switch fixing

Nm	2.5
lbin	22.1

Contact terminals

Nm	0.8
lbin	7

Body lid screw fixing

Nm	0.8
lbin	7

Conductor section

AWG/Kcmil

min	16
max	14

IEC

min	mm ²	1or 2
max	mm ²	2.5

Cable connection

Self-releasing
screw terminal

Cable entry M20 on the sides

Operations

Mechanical life	cycles	100000
B10d	cycles	100000
Mechanical operation	cycles/h	3600

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


IP degree

Terminals	IP20
Body housing	IP65

Pollution degree


3

Dimensions

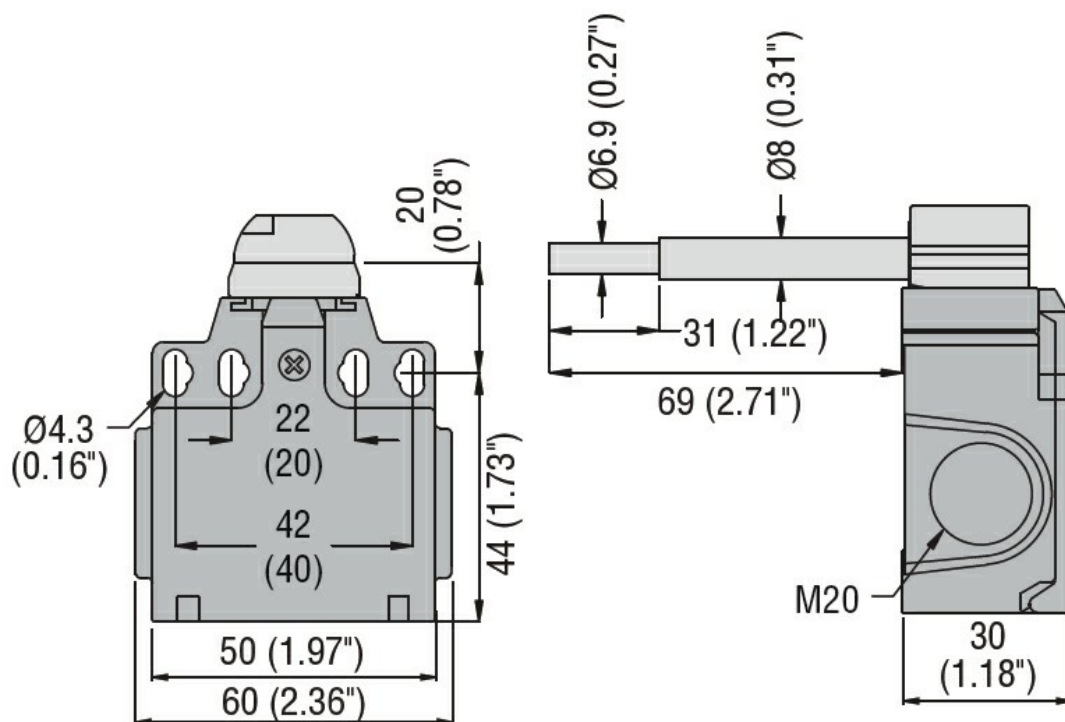

Wiring diagrams

Slow action

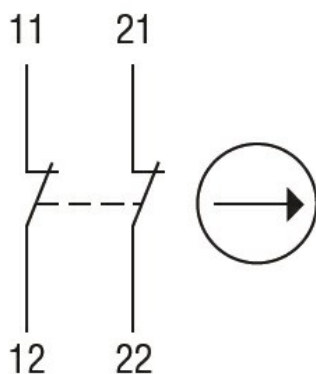

2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch