




Product designation	Variable speed drives	
Product type designation	VLB3	
<b>General characteristics</b>		
Rated power supply voltage		400...480VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current	A	13
Rated output power	kW	5.5
Rated output power	HP	7.5 (Heavy load) / 10 (Standard load)
EMC filter	Built-in EMC suppressor cat. C2	
Communication port	RS485, Modbus- RTU	
<b>Technical features</b>		
Input type	Three-phase	
Rated mains voltage	VAC	400...480
Operating mains voltage range	VAC	340...528
Rated mains frequency	Hz	50/60
Operating mains frequency range	Hz	45...65
Rated mains current without mains choke	17.2 (heavy load) / 18.3 (standard load)	
Rated mains current with mains choke	12.4 (heavy load) / 14.5 (standard load)	
Output type	Three-phase	
Output voltage range	VAC	0...480
Output frequency range	Hz	0...599
Current overload	%/s	150% for 60s; 200% for 3s
Apparent output power	8.7 (heavy load) / 10.5 (standard load)	
Power loss	4kHz: 145W (heavy load) / 173 (standard load)	
Brake chopper	Yes	
Switching frequency	2...16kHz	
Max motor cable length	Shielded	Without EMC category m 100


	Category C1	m	3
	Category C2	m	20
	Category C3	m	35
Unshielded	Without EMC category	m	200
<b>Functions</b>			
Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless		
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0... 10VDC or -10... +10VDC Current signals: 0/4... 20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer		
3-wire control	Yes		
S-shape curves	Yes		
Slip compensation	Yes		
Flying restart	Yes		
Access to DC bus	Yes		
DC braking	Yes		
DC injection at start	Yes		
PID control	Yes, with sleep and rinse function		
Sequencer (programmable frequency/time cycles)	Yes		
Preset speeds	Yes		
Motorpotentiometer	Yes		
Different parameter configuration sets	Yes		
Parameters changeover function	Yes		
Favorite parameters menu	Yes		
Autotuning	No		
Safe torque Off (STO) safety function	Optional		
PTC probe input	Yes		

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i <sup>2</sup> t) Overspeed Speed reverse						
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)						
<b>Input and Output</b>							
Number of digital input	Nr. 5						
Digital input type	Selectable PNP or NPN logic						
Number of digital output	Nr. 2						
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output						
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC						
Number of analog input	Nr. 2						
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA						
Number of analog output	Nr. 1						
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA						
<b>Ambient conditions</b>							
Temperature	<table> <tr> <td>Operating temperature</td> <td>min °C</td> <td>-10</td> </tr> <tr> <td></td> <td>max °C</td> <td>+55</td> </tr> </table>	Operating temperature	min °C	-10		max °C	+55
Operating temperature	min °C	-10					
	max °C	+55					

			switching frequency 2 or 4kHz: 2.5%/°C over 45°C
		Current derating	switching frequency 8 or 16kHz: 2.5%/°C over 40°C
Storage temperature	min °C	-25	
	max °C	+60	
Relative humidity	%	5...95% (with no condensing)	
Max altitude	m	4000m (over 1000m derate the rated current by 5%/1000m)	
Maximum Pollution degree		2	
Overvoltage category		III up to 2000m altitude (II above 2000m)	
<b>Housing</b>			
Installation position		Vertical	
IP degree of protection		IP20	
Dimensions (W x H x D)	mm	90 x 278 x 130	
Weight	Kg	2.45	
<b>Dimensions</b>			

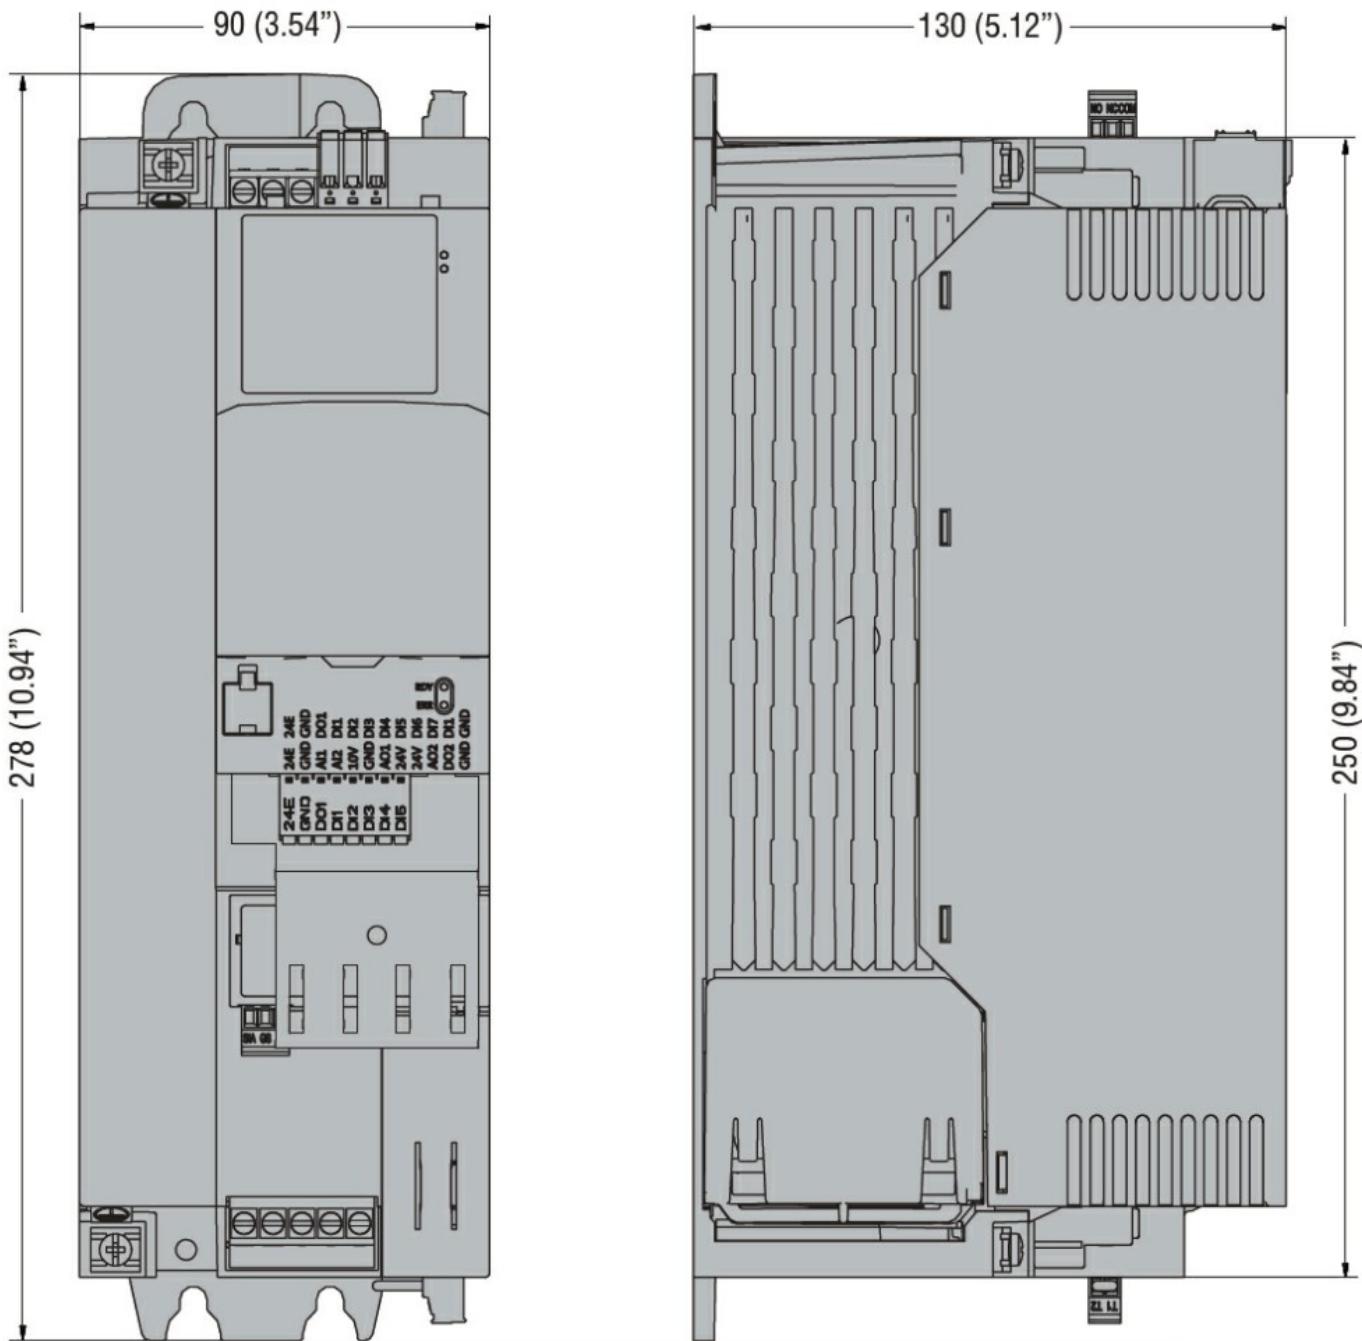

## Wiring diagrams

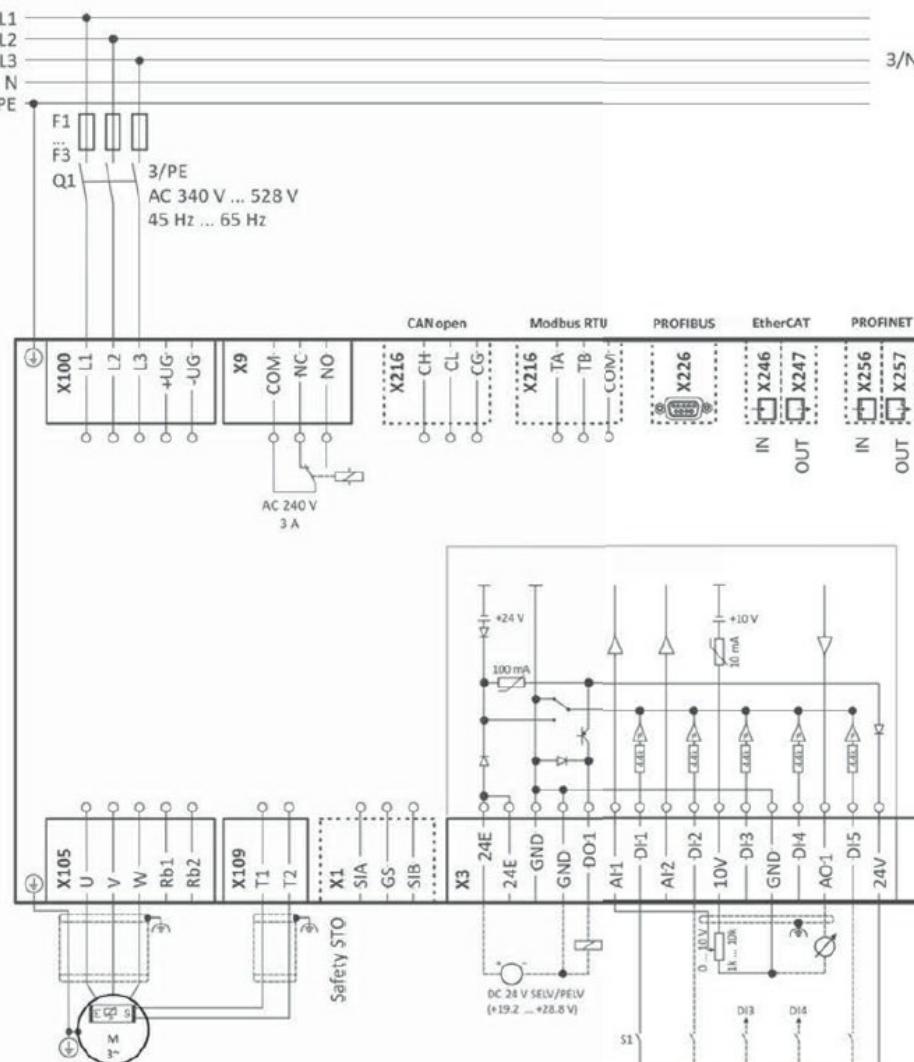

### Certifications and compliance

#### Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

#### Certificates

CSA

cULus

EAC

RCM

### ETIM classification

#### ETIM 8.0

EC001857 -  
Frequency  
converter =< 1 kV