



15WAC-DC Reliable Industrial Adaptor

GS15U series



■ Features :

- Universal AC input / Full range
- 2 pole USA plug, Class II power unit
- No load power consumption<0.075W
- **Energy efficiency Level VI**
- Comply with EISA 2007/DoE
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- **Various DC plug quick adapter accessory available**
(Plug kit sold separately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 2 years warranty


■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

■ Description

GS15U is a highly reliable, 15W wall-mounted style single-output green adaptor series. This product is a class II power unit (no FG), equipped with a 2-Pin standard USA AC power plug, adopting the input range from 90VAC to 264VAC. The entire series supplies different models with output voltages ranging between 5VDC and 48VDC that can satisfy the demands for various types of consumer electronic devices. With the efficiency up to 87% and the extremely low no-load power consumption below 0.075W, GS15U is compliant with USA EISA 2007/DoE. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case, providing the double insulation that effectively prevents electrical shock.

■ Model Encoding

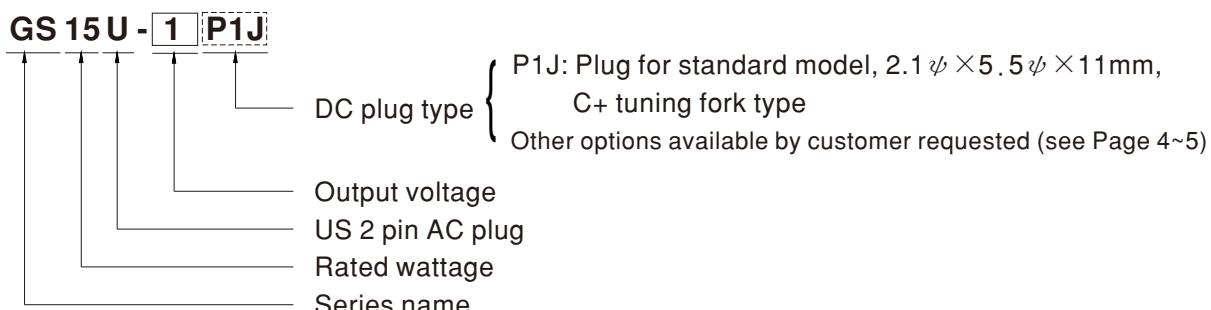

SPECIFICATION


ORDER NO.		GS15U-1P1J	GS15U-11P1J	GS15U-2P1J	GS15U-3P1J	GS15U-4P1J	GS15U-5P1J	GS15U-6P1J	GS15U-8P1J							
OUTPUT	SAFETY MODEL NO.	GS15U-1	GS15U-1-1	GS15U-2	GS15U-3	GS15U-4	GS15U-5	GS15U-6	GS15U-8							
	DC VOLTAGE Note.2	5V	7.5V	9V	12V	15V	18V	24V	48V							
	RATED CURRENT	2.40A	1.60A	1.66A	1.25A	1.00A	0.83A	0.625A	0.31A							
	CURRENT RANGE	0 ~ 2.40A	0 ~ 1.60A	0 ~ 1.66A	0 ~ 1.25A	0 ~ 1.00A	0 ~ 0.83A	0 ~ 0.625A	0 ~ 0.31A							
	RATED POWER	12W	12W	15W	15W	15W	15W	15W	15W							
	ripple & noise (max.) Note.3	50mVp-p	80mVp-p	80mVp-p	80mVp-p	100mVp-p	120mVp-p	150mVp-p	240mVp-p							
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%							
	LINE REGULATION Note.5	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%							
	LOAD REGULATION Note.6	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%							
SETUP, RISE, HOLD UP TIME		3000ms, 50ms, 10ms at full load														
INPUT	VOLTAGE RANGE	90 ~ 264VAC 135 ~ 370VDC														
	FREQUENCY RANGE	47 ~ 63Hz														
	EFFICIENCY (Typ.)	80%	82.5%	85%	85%	85%	85%	85.5%	87%							
	AC CURRENT	0.4A / 100VAC														
	INRUSH CURRENT (max.)	Cold start 30A / 115VAC 50A / 230VAC														
PROTECTION	LEAKAGE CURRENT(max.)	0.25mA / 240VAC														
	OVERLOAD	105 ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed														
	OVER VOLTAGE	>120% rated output voltage Protection type : Clamp by zener diode														
	WORKING TEMP.	0 ~ +50°C (Refer to "Derating Curve")														
ENVIRONMENT	WORKING HUMIDITY	20% ~ 90% RH non-condensing														
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing														
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)														
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes														
SAFETY & EMC (Note. 7)	SAFETY STANDARDS	UL62368-1, CSA C22.2 NO. 62368-1, EAC TP TC 004 approved														
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC														
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH														
	EMC EMISSION	Parameter	Standard				Test Level / Note									
		Conducted emission	FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B)				Class B									
		Radiated emission	FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B)				Class B									
OTHERS	MTBF	500Khrs min. MIL-HDBK-217F(25°C)														
	DIMENSION	34*71*50mm (L*W*H)														
	PACKING	150g ; 84pcs / 14Kg / CARTON														
CONNECTOR	PLUG	See page 4~5 ; Other type available by customer requested														
	CABLE	See page 4~5 ; Other type available by customer requested														
NOTE	1.All parameters are specified at 115VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µF & 47µF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx															




15W AC-DC Reliable Industrial Adaptor

GS15U series

■ Derating Curve



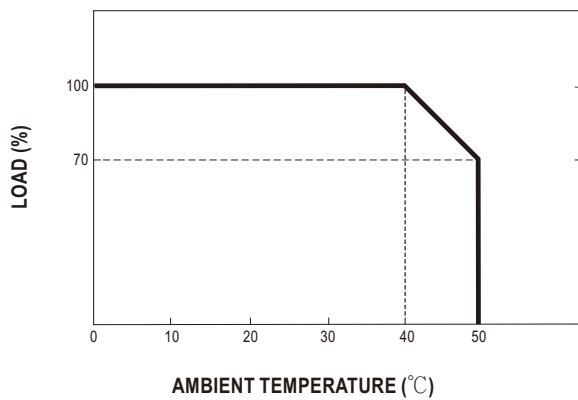


■ Static Characteristics

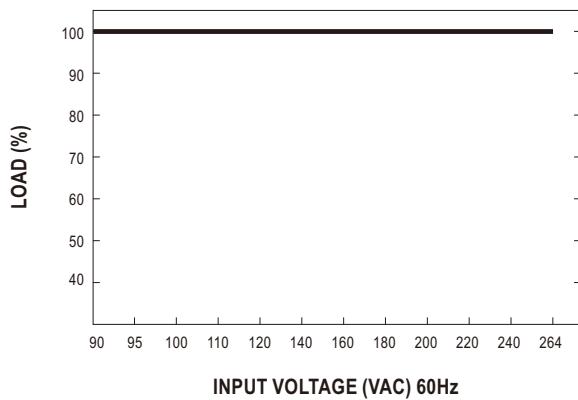

■ Mechanical Specification

Unit:mm

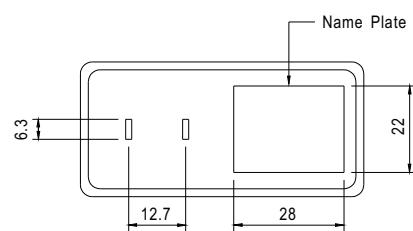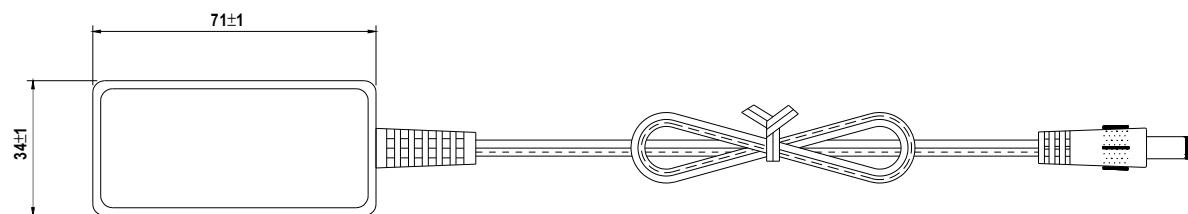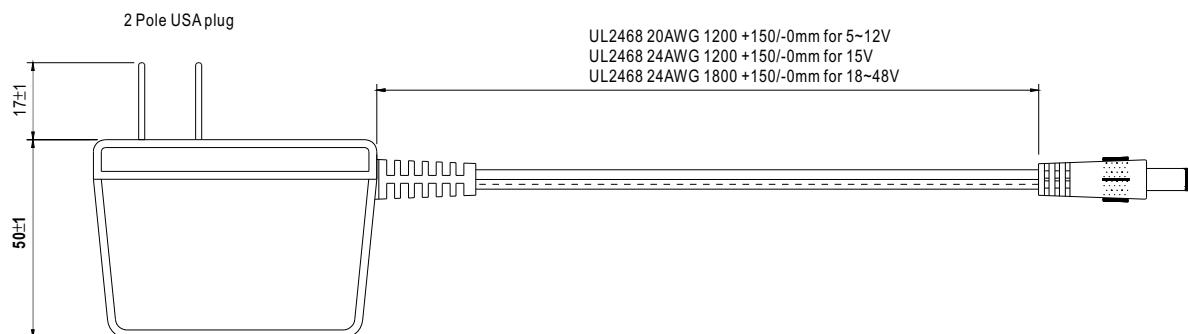

■ DC output plug

- ◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
 	 Outside - - - - - Inside
	 Outside + - - - - Inside

- ◎ DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:







- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A	B	C	Quick Adapter Accessory
		OD	ID	L	
 (Straight)	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style		Type No.	A	C	None
 (Straight)	Type No.	OD	ID	L	
	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
	P2LR	5.5	2.5	9.5	
Lock Style		Type No.	A	C	None
 Floating Locking	Type No.	OD	ID	L	
	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
	P2C(S760K)	5.53	2.03	9.52	
Min. Pin Style		Type No.	A	C	Available (Current rating: 5A max.)
 EIAJ equivalent	Type No.	OD	ID	L	
	P3A	2.35	0.7	11.0	
	P3B	4.0	1.7	11.0	
	P3C	4.75	1.7	11.0	



15W AC-DC Reliable Industrial Adaptor

GS15U series

Center Pin Style	Type No.	A	B	C	D	Quick Adapter Accessory	
		OD	ID	L	Center Pin		
	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	P4B	6.5	4.4	11.0	1.4		
	P4C	7.4	5.1	11.0	0.6		
Min. DIN 3 Pin with Lock (male)	Type No.	Pin Assignment				Available (Current rating: 7.5A max.)	
		PIN No.		Output			
		1		+Vo			
	R6B	2		-Vo		Available (Current rating: 7.5A max.)	
		3		+Vo			
Min. DIN 4 Pin with Lock (male)		Pin Assignment				Available (Current rating: 7.5A max.)	
	R7B	PIN No.		Output			
		1		+Vo			
		2		-Vo			
		3		-Vo			
		4		+Vo			
Min. DIN 4 Pin with Lock (female)	R7BF	Pin Assignment				None	
		PIN No.		Output			
		1		+Vo			
		2		-Vo			
		3		-Vo			
		4		+Vo			
Stripped and tinned leads	by customer	Pin Assignment				None	
		PIN No.		Output			
		1 (White)		+Vo			
Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)		2 (Black)		-Vo			

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>