



45W AC-DC PCB-Mount Green Power Module

IRM-45 series



(IRM-45)



(IRM-45-xxST)



LPS (except for 5V) UL62368-1

BS EN/IEC 62368-1
 BS EN/EN60335-1

R3100
RoHS

TPTC004

IEC62368-1

CB CE UKCA

ECO

Automate

Industrial

Security

Network

Telecom

■ Features

- 3.43"x2.05"compact size
- PCB,chassis or screw terminal mounting version
- Universal input 85~305VAC
- No load power consumption<0.15W
- EMI Class B without additional components
- Wide operating temp. range -30~70°C
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation Class II
- Over voltage category III
- Pass LPS(Except for 5V)
- 3 years warranty

■ Description

IRM-45 is a 45W miniature (87*52*29.5mm) AC-DC module-type power supply, ready to be soldered onto the PCB boards of various kinds of electronic instruments or industrial automation equipments. This product allows the universal input voltage range of 85~305VAC. The 94V-0 flame retardant plastic case and the fully-potted silicone enhance the heat dissipation. PCB mounting style model(Blank) meet the anti-vibration demand up to 2G and screw terminal style model (ST) meet the anti-vibration demand up to 5G; moreover, it provides the fundamental resistance to dust and moisture.

With the high efficiency up to 90.5% and the extremely low no-load power consumption below 0.15W, IRM-45 series fulfills the worldwide regulation for the low power consumption requirement for electronics. The entire series is a Class II design (no FG pin), incorporating the built-in EMI filtering components, enabling the compliance with BS EN/EN55032 Class B; the supreme EMC features keep the end electronic units from electromagnetic interference. In addition to the PCB mounting style model, IRM-45 series also offers the screw terminal style model (ST).

■ Model Encoding



SPECIFICATION


MODEL	IRM-45-5 □	IRM-45-12 □	IRM-45-15 □	IRM-45-24 □	IRM-45-48 □						
OUTPUT	DC VOLTAGE	5V	12V	15V	24V						
	RATED CURRENT	8A	3.8A	3A	1.9A						
	CURRENT RANGE	0 ~ 8A	0 ~ 3.8A	0 ~ 3A	0 ~ 1.9A						
	RATED POWER	40W	45.6W	45W	45.6W						
	RIPPLE & NOISE (max.) Note.2	80mVp-p	150mVp-p	180mVp-p	200mVp-p						
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.5%	±2.5%	±2.5%						
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%						
	LOAD REGULATION	±1.0%	±1.0%	±0.5%	±0.5%						
	SETUP, RISE TIME	1000ms, 30ms/230VAC	2000ms, 30ms/115VAC at full load								
INPUT	HOLD UP TIME (Typ.)	50ms/230VAC	12ms/115VAC at full load								
	VOLTAGE RANGE	85 ~ 305VAC									
	FREQUENCY RANGE	47 ~ 440Hz									
	EFFICIENCY (Typ.)	83.5%	87.5%	88.5%	89.5%						
	AC CURRENT (Typ.)	1.5A/115VAC	0.9A/230VAC	0.75A/277VAC							
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC	60A/230VAC								
PROTECTION	LEAKAGE CURRENT	< 0.25mA/277VAC									
	OVERLOAD	115%~160% rated output power									
		Protection type : Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE	5.25 ~ 6.75V	12.6 ~ 16.2V	15.75 ~ 20.25V	25.2 ~ 32.4V						
		Protection type : Shut off o/p voltage, clamping by zener diode			50.4 ~ 64.8V						
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20 ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)									
	VIBRATION	Blank:10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes									
		ST:10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes									
	LEAD TEMPERATURE	260±5°C, 5s (max.)									
SAFETY & EMC (Note.5)	OVER VOLTAGE CATEGORY	III; According to EN62368-1; altitude up to 2000 meters									
	OPERATING ALTITUDE Note.4	2000 meters									
	SAFETY STANDARDS	IEC62368-1, UL62368-1, TUV BS EN/EN62368-1, BS EN/EN60335-1, EAC TP TC 004, BSMI CNS14336-1 approved									
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC									
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION	Parameter	Standard	Test Level / Note							
		Conducted	BS EN/EN55032(CISPR32), CNS13438	Class B							
		Radiated	BS EN/EN55032(CISPR32), CNS13438	Class B							
		Harmonic Current (Note 5)	BS EN/EN1000-3-2	Class A							
		Voltage Flicker	BS EN/EN1000-3-3	-----							
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN1000-6-2									
		Parameter	Standard	Test Level / Note							
		ESD	BS EN/EN1000-4-2	Level 3, 8KV air; Level 2, 4KV contact, criteria A							
		Radiated Susceptibility	BS EN/EN1000-4-3	Level 3, criteria A							
		EFT/Burst	BS EN/EN1000-4-4	Level 3, criteria A							
		Surge	BS EN/EN1000-4-5	Level 4, 2KV/L-N, criteria A							
		Conducted	BS EN/EN1000-4-6	Level 3, criteria A							
		Magnetic Field	BS EN/EN1000-4-8	Level 4, criteria A							
		Voltage Dips and interruptions	BS EN/EN1000-4-11	>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods							
OTHERS	MTBF	1212Khrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	PCB mounting style : 87*52*29.5mm (L*W*H) Screw terminal style : 109*52*33.5mm (L*W*H)									
	PACKING	PCB mounting style : 0.195Kg;60pcs/12.7Kg/0.94CUFT Screw terminal style :0.228Kg; 50pcs/12.4Kg/0.56CUFT									
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.										
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.										
	3. Tolerance : includes set up tolerance, line regulation and load regulation.										
	4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).										
	5. The power supply is considered as an independent unit ,but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)										
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx											




45W AC-DC PCB-Mount Green Power Module

IRM-45 series


■ Block Diagram

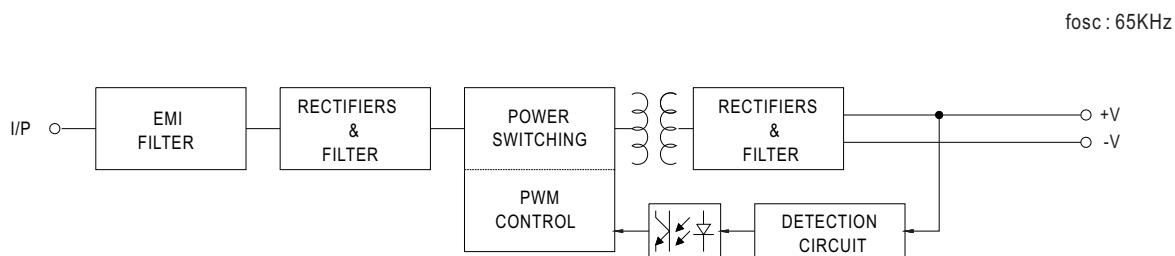

■ Derating Curve

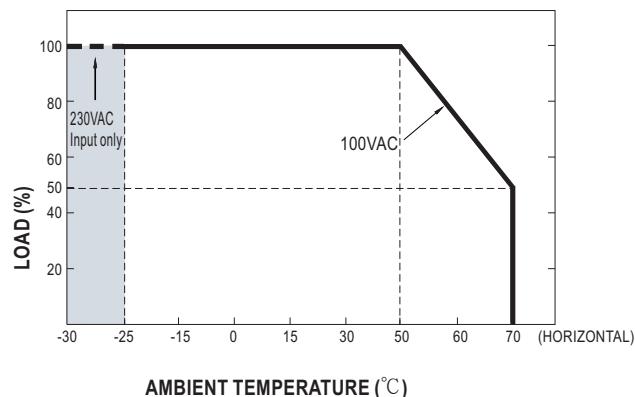


■ Output Derating VS Input Voltage

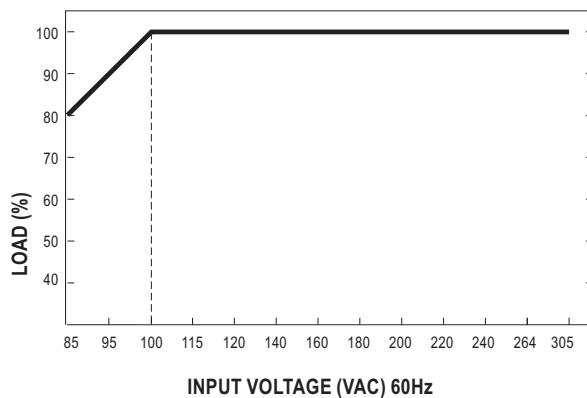


Mechanical Specification

Case No.IRM60 Unit:mm

- PCB mounting style
(IRM-45)

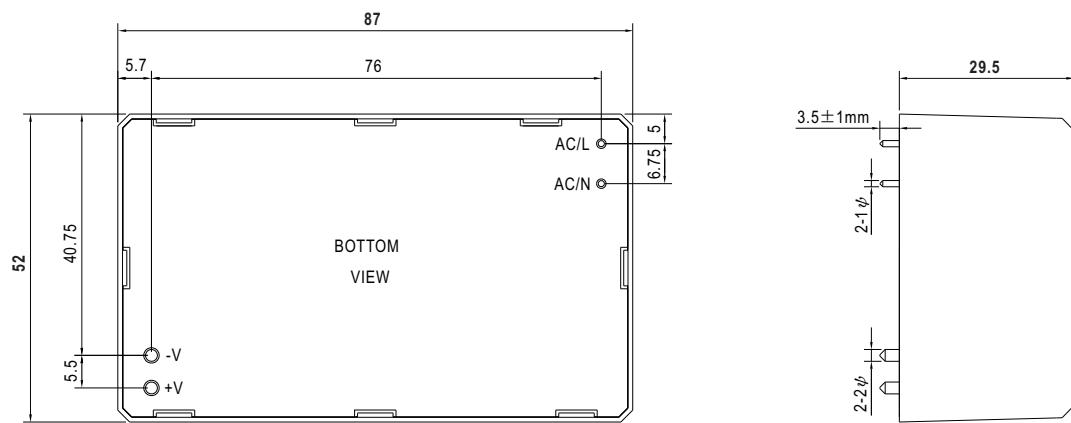
 AC/L, AC/N P/N diameter:1 ϕ
 +V, -V P/N diameter:2 ϕ

- Screw terminal style
(IRM-45-xxST)

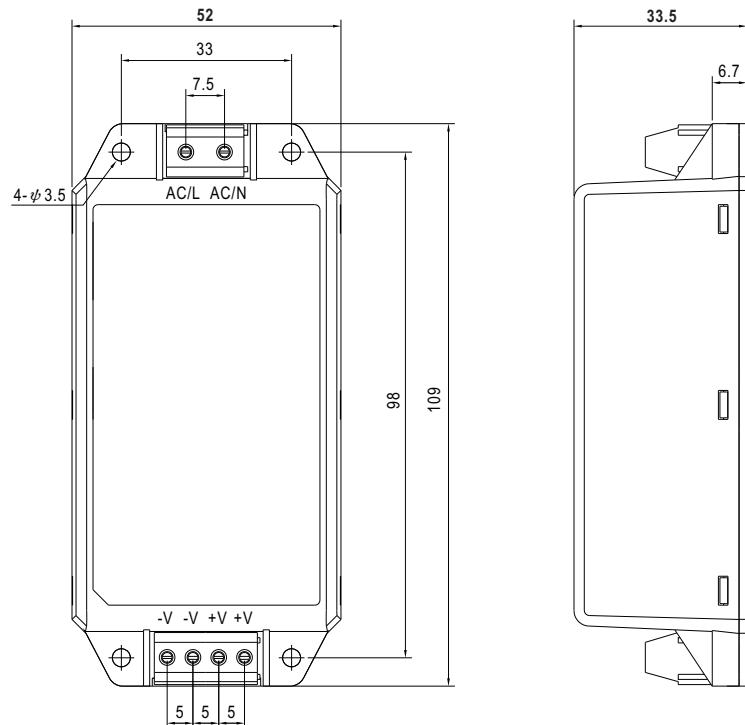
Installation Manual

 Please refer to : <http://www.meanwell.com/manual.html>