




Thru-beam sensor LD28/LV28-F1/47/76a/82b/105



- Universal series with highly versatile fields of use
- Resistant against noise: reliable operation under all conditions
- Highly visible LED as alignment aid in receiver optics
- Emitter with test input
- Version with red light


Universal thru-beam sensor, large housing design, 30 m detection range, red light, 25 kHz transmission frequency, light/dark on, DC version, 2 PNP outputs, test input, pre-fault output, M12 plug



Dimensions

Transmitter

Receiver

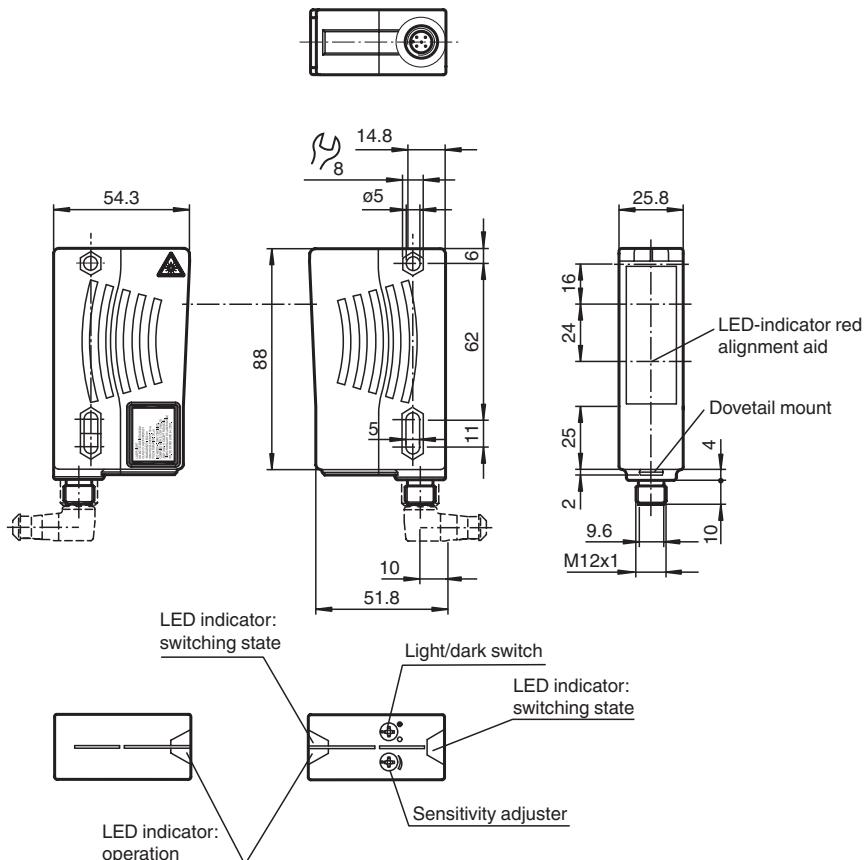

Technical Data

System components

Emitter

LD28-F1/76a/105

Release date: 2021-11-11 Date of issue: 2021-11-11 Filename: 115578_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Receiver	LV28-F1/47/82b/105	
General specifications		
Effective detection range	0 ... 30 m	
Threshold detection range	40 m	
Light source	LED	
Light type	modulated visible red light , 660 nm	
Alignment aid	LED red (in receiver lens) illuminated constantly: beam is interrupted, flashes: reaching switching point, off: sufficient stability control	
Transmitter frequency	F1 = 25 kHz	
Diameter of the light spot	approx. 0.6 m at 30 m	
Angle of divergence	Emitter 1.2°, Receiver 5°	
Ambient light limit	50000 Lux	
Functional safety related parameters		
MTTF _d	620 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	90 %	
Indicators/operating means		
Operation indicator	LED green	
Function indicator	LED yellow: 1. LED lit constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point	
Control elements	sensitivity adjustment (Adjustment to < 25% of the effective operating range) , Light-on/dark-on changeover switch	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	Emitter: ≤ 50 mA Receiver: ≤ 35 mA
Input		
Test input		emitter deactivation at +U _B (I _{max.} < 3 mA at 30 V DC)
Output		
Pre-fault indication output		1 PNP transistor, short-circuit protected, protected from reverse polarity, open collector, U _{max} = 30 V DC, I _{max} = 0.2 A The output becomes inactive if the signal level has fallen below the function reserve for approx. 10 s (yellow and red LEDs flash). If the light beam is interrupted four times during this period, the output immediately becomes inactive.
Switching type		light/dark on, switchable
Signal output		2 PNP, complementary, short-circuit protected, reverse polarity protected , open collectors
Switching voltage		max. 30 V DC
Switching current		max. 200 mA
Switching frequency	f	1000 Hz
Response time		0.5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
EAC conformity		TR CU 020/2011
Protection class		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed , Class 2 power source
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 75 °C (-40 ... 167 °F)
Mechanical specifications		


Technical Data

Housing width	25.8 mm
Housing height	88 mm
Housing depth	54.3 mm
Degree of protection	IP67
Connection	5-pin, M12 x 1 plastic connector
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	140 g (emitter and receiver)

Connection Assignment

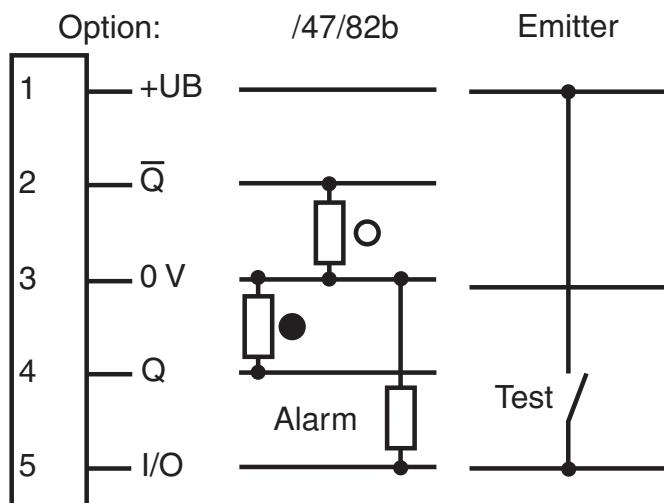

Connection Assignment



Wire colors in accordance with EN 60947-5-2



1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)

Characteristic Curve

Characteristic response curve



LD28/LV2; LA28/LK28

Offset Y [mm]

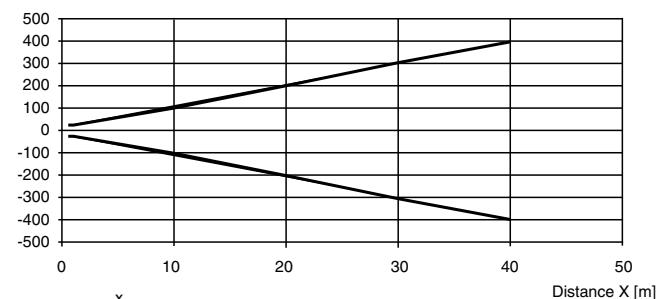

Relative received light strength



Stability control

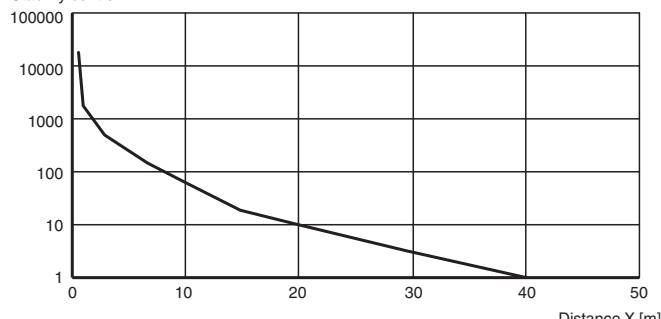

Light spot diameter = f (Distance)

LD28/LV28;
LA28/LK28

Diameter in mm

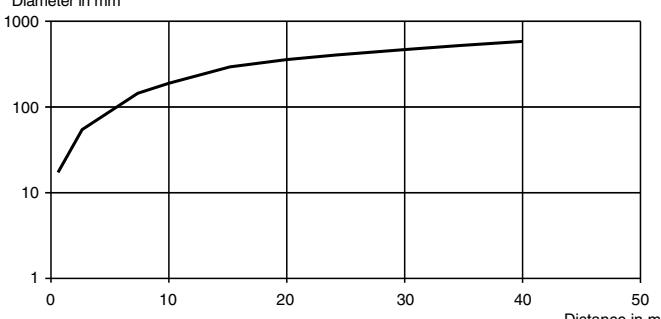

Accessories

**OMH-05**Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm**OMH-21**

Mounting bracket: mounting aid for sensors in the RL* series

**OMH-22**

Mounting aid for RL* series

Accessories

	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-RL28-C	Weld slag cover model