



Cable gland

CP-CGL-SLT-5/16-M20 5pcs


- Suitable for 5/16" flexible coated conduit

Cable gland M20 for cable diameter 4 ... 8.3 mm and 5/16" flexible coated conduit

Function

The cable gland is used in conjunction with a suitable flexible conduit and a suitable sensor adapter to form a cable protection system for sensors. The purpose of this system is to protect the sensor wiring in harsh environments.

Dimensions

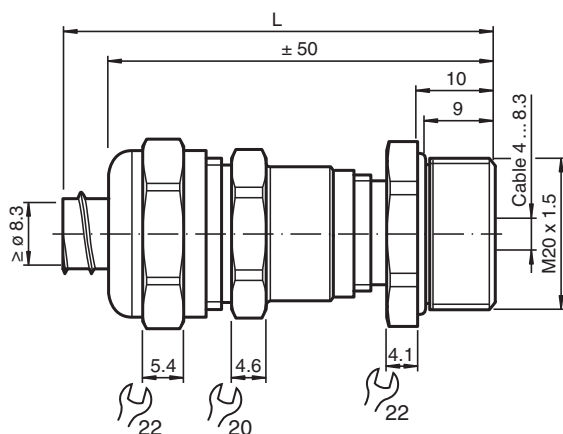

Technical Data

Mechanical specifications

Clamping range (D)	
Seal insert	outer seal: for cable diameter 6 ... 8.3 mm outer seal + inner seal: for cable diameter 4 ... 6 mm
Thread type	metric
Thread size	M20 x 1.5
Degree of protection	IP65
Material	
Cable gland	brass, nickel-plated
Seal	Seal two-piece , synthetic rubber EDPM V0
Clamping ring	PVC
O-Ring	NBR

Technical Data

Mass	66 g
General information	
Supplementary information	observe mounting instructions

Matching system components

	CP-CDT-SLT-5/16-10M	5/16" flexible coated conduit 10 m
	CP-ADP-SLT-5/16-M18 5pcs	Sensor adapter for M18 sensors and 5/6" flexible coated conduit
	CP-ADP-SLT-5/16-M30 5pcs	Sensor adapter for M30 sensors and 5/6" flexible coated conduit
	LOCKNUT M20 NICKEL BRASS	Nut, nickel-plated brass