



KTX-WB9114225UZZZ

KTX

CONTRAST SENSORS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	part no.
KTX-WB9114225UZZZ	1219608

Other models and accessories → www.sick.com/KTX

Detailed technical data

Features

Special applications	Standard
Device type	Standard
Dimensions (W x H x D)	30 mm x 53 mm x 78.5 mm
Sensing distance	≤ 13 mm
Sensing distance tolerance	± 5 mm
Housing design	Large
Light source	LED, RGB ¹⁾
Wave length	470 nm, 525 nm, 625 nm
Light emission	Short device side
Light spot size	0.9 mm x 3.8 mm
Light spot direction	Vertical ²⁾
Receiving filters	None
Teach-in mode	1-point teach-in, 2-point teach-in, teach-in dynamic, auto mode
Output function	Light/dark switching
Delay time	Adjustable
Special features	Complete access to all functions after unlockingAll general sensor functions are available when the sensor is unlocked using the plus/minus pushbutton - same functionality as standard KTX
Delivery status	2-point teach-in
Parameter presets	Key lock active, initially only teach-in possible
Setting the key lock	Standard Teach-in
Safety-related parameters	

¹⁾ Average service life: 100,000 h at T_U = +25 °C.²⁾ In relation to long side of housing.

MTTF _D	291 years
-------------------	-----------

1) Average service life: 100,000 h at T_U = +25 °C.

2) In relation to long side of housing.

Interfaces

Analog	✓, Analog output (voltage)
Analog output	
Number	Q _A
Type	1
Voltage	Voltage output
	0 V ... 10 V
Digital output	
Number	Q ₁
	1
Digital input	
Number	I _{n1}
	1

Electronics

Supply voltage	10.8 V DC ... 28.8 V DC ¹⁾
Ripple	≤ 5 V _{pp} ²⁾
Current consumption	< 100 mA ³⁾
Switching frequency	50 kHz ⁴⁾ 5)
Response time	10 µs ⁶⁾ 7)
Jitter	5 µs ⁸⁾
Switching output	Push-pull: PNP/NPN
Switching output (voltage)	Push-pull: PNP/NPN HIGH = U _V - 3 V/LOW ≤ 3 V
Output current I_{max.}	100 mA ⁹⁾
Input, teach-in (ET)	Teach: U = 10 V ... < V _S
Input, blanking input (AT)	Blanked: U = 10 V ... < U _V
Input, fine/coarse (F/C)	Coarse: U = 10 V ... < U _V
Input, light/dark (L/D)	Light: U = 10 V ... < U _V
Retention time (ET)	25 ms, non-volatile memory
Protection class	III
Circuit protection	U _V connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression

1) Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

2) May not fall below or exceed U_V tolerances.

3) Without load.

4) With light/dark ratio 1:1.

5) 1-point teach-in (color mode): 16 kHz.

6) Signal transit time with resistive load.

7) 1-point teach-in (color mode): 30 µs.


8) 1-point teach-in (color mode): 15 µs.

9) Total current of all Outputs.

Enclosure rating	IP67																										
<p>¹⁾ Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.</p> <p>²⁾ May not fall below or exceed U_y tolerances.</p> <p>³⁾ Without load.</p> <p>⁴⁾ With light/dark ratio 1:1.</p> <p>⁵⁾ 1-point teach-in (color mode): 16 kHz.</p> <p>⁶⁾ Signal transit time with resistive load.</p> <p>⁷⁾ 1-point teach-in (color mode): 30 µs.</p> <p>⁸⁾ 1-point teach-in (color mode): 15 µs.</p> <p>⁹⁾ Total current of all Outputs.</p>																											
Mechanics																											
<table border="1"> <tr> <td>Housing material</td><td>VISTAL®</td></tr> <tr> <td>Optics material</td><td>COP</td></tr> <tr> <td>Connection type</td><td>Plug, M12, 5-pin</td></tr> <tr> <td>Weight</td><td>94 g</td></tr> </table>		Housing material	VISTAL®	Optics material	COP	Connection type	Plug, M12, 5-pin	Weight	94 g																		
Housing material	VISTAL®																										
Optics material	COP																										
Connection type	Plug, M12, 5-pin																										
Weight	94 g																										
Ambient data																											
<table border="1"> <tr> <td>Ambient operating temperature</td><td>-20 °C ... +60 °C</td></tr> <tr> <td>Ambient temperature, storage</td><td>-25 °C ... +75 °C</td></tr> <tr> <td>Shock load</td><td>According to IEC 60068-2-27 (30 g/11 ms)</td></tr> <tr> <td>UL File No.</td><td>E181493</td></tr> </table>		Ambient operating temperature	-20 °C ... +60 °C	Ambient temperature, storage	-25 °C ... +75 °C	Shock load	According to IEC 60068-2-27 (30 g/11 ms)	UL File No.	E181493																		
Ambient operating temperature	-20 °C ... +60 °C																										
Ambient temperature, storage	-25 °C ... +75 °C																										
Shock load	According to IEC 60068-2-27 (30 g/11 ms)																										
UL File No.	E181493																										
Certificates																											
<table border="1"> <tr> <td>EU declaration of conformity</td><td>✓</td></tr> <tr> <td>UK declaration of conformity</td><td>✓</td></tr> <tr> <td>ACMA declaration of conformity</td><td>✓</td></tr> <tr> <td>Moroccan declaration of conformity</td><td>✓</td></tr> <tr> <td>China-RoHS</td><td>✓</td></tr> <tr> <td>cULus certificate</td><td>✓</td></tr> <tr> <td>Photobiological safety (IEC EN 62471)</td><td>✓</td></tr> </table>		EU declaration of conformity	✓	UK declaration of conformity	✓	ACMA declaration of conformity	✓	Moroccan declaration of conformity	✓	China-RoHS	✓	cULus certificate	✓	Photobiological safety (IEC EN 62471)	✓												
EU declaration of conformity	✓																										
UK declaration of conformity	✓																										
ACMA declaration of conformity	✓																										
Moroccan declaration of conformity	✓																										
China-RoHS	✓																										
cULus certificate	✓																										
Photobiological safety (IEC EN 62471)	✓																										
Classifications																											
<table border="1"> <tr> <td>ECLASS 5.0</td><td>27270906</td></tr> <tr> <td>ECLASS 5.1.4</td><td>27270906</td></tr> <tr> <td>ECLASS 6.0</td><td>27270906</td></tr> <tr> <td>ECLASS 6.2</td><td>27270906</td></tr> <tr> <td>ECLASS 7.0</td><td>27270906</td></tr> <tr> <td>ECLASS 8.0</td><td>27270906</td></tr> <tr> <td>ECLASS 8.1</td><td>27270906</td></tr> <tr> <td>ECLASS 9.0</td><td>27270906</td></tr> <tr> <td>ECLASS 10.0</td><td>27270906</td></tr> <tr> <td>ECLASS 11.0</td><td>27270906</td></tr> <tr> <td>ECLASS 12.0</td><td>27270906</td></tr> <tr> <td>ETIM 5.0</td><td>EC001820</td></tr> <tr> <td>ETIM 6.0</td><td>EC001820</td></tr> </table>		ECLASS 5.0	27270906	ECLASS 5.1.4	27270906	ECLASS 6.0	27270906	ECLASS 6.2	27270906	ECLASS 7.0	27270906	ECLASS 8.0	27270906	ECLASS 8.1	27270906	ECLASS 9.0	27270906	ECLASS 10.0	27270906	ECLASS 11.0	27270906	ECLASS 12.0	27270906	ETIM 5.0	EC001820	ETIM 6.0	EC001820
ECLASS 5.0	27270906																										
ECLASS 5.1.4	27270906																										
ECLASS 6.0	27270906																										
ECLASS 6.2	27270906																										
ECLASS 7.0	27270906																										
ECLASS 8.0	27270906																										
ECLASS 8.1	27270906																										
ECLASS 9.0	27270906																										
ECLASS 10.0	27270906																										
ECLASS 11.0	27270906																										
ECLASS 12.0	27270906																										
ETIM 5.0	EC001820																										
ETIM 6.0	EC001820																										

ETIM 7.0	EC001820
ETIM 8.0	EC001820
UNSPSC 16.0901	39121528


Dimensional drawing

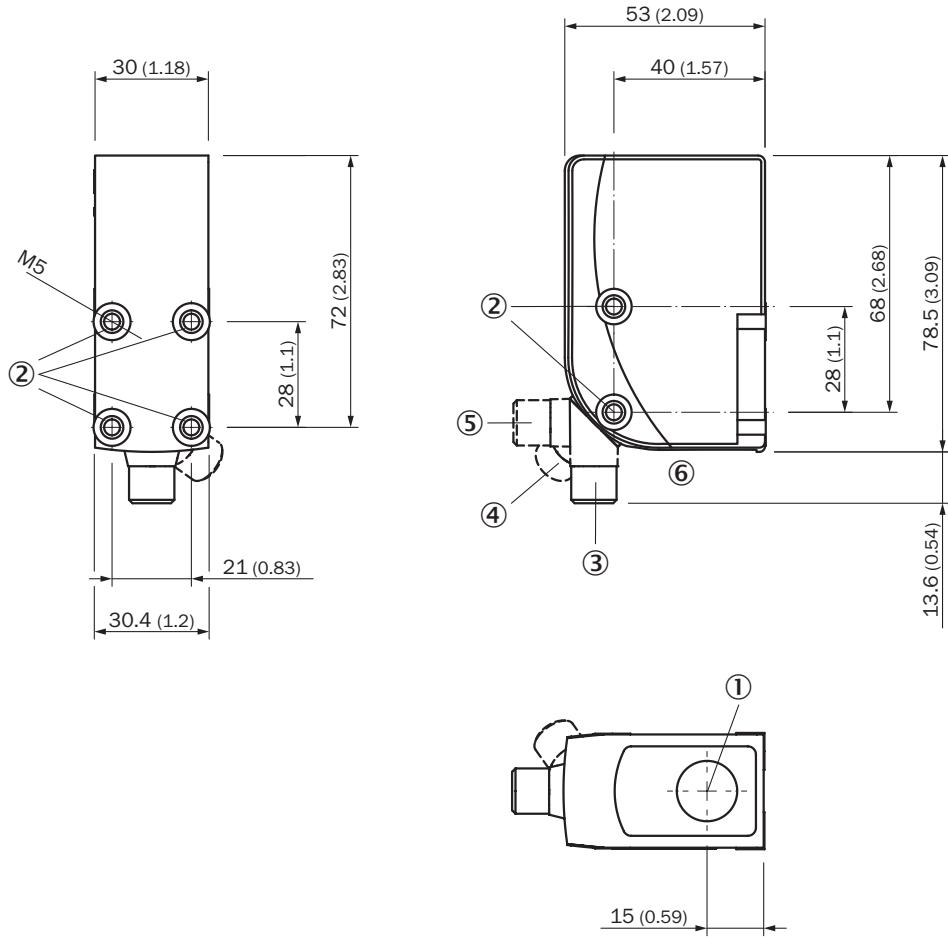

Dimensions in mm (inch)

- ① Optical axis
- ② Threaded mounting hole M5
- ③ M12 male connector, delivery state
- ④ M12 male connector, end stop right
- ⑤ M12 male connector, end stop left
- ⑥ display and adjustment elements

display and adjustment elements

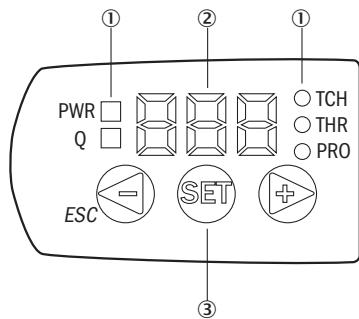


① LED status indicator

② Display

③ Navigation buttons


Connection diagram Cd-385



KTS/KTX Prime - setting the switching threshold (2-point teach-in)


Suitable for manual positioning of the object to be detected, e.g. marks and background.

1. Position mark



When setting the contrasts to be detected, "1st" flashes.
Press set button.

2. Position background




When setting the contrasts to be detected, "2nd" flashes. Press set button.
The Quality of Teach is displayed.

KTS/KTX Prime - Setting the switching threshold (teach-in dynamic)


Suitable for teaching in moving objects.

1. Position background




Press the Set pushbutton to start the teach-in process.

2. Move at least the mark and background using the light spot


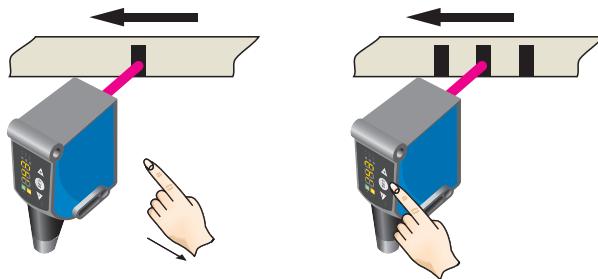


The display lights up during repeat length detection (---).



Press the Set pushbutton to end the teach-in process.
The Quality of Teach is displayed.

Example

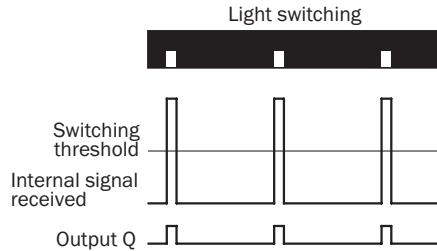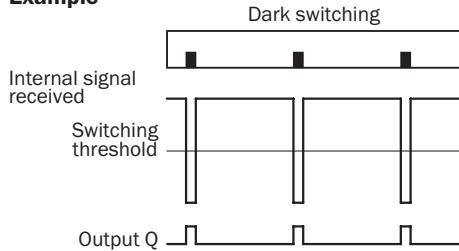

Switching characteristics

The optimum emitted light is selected automatically (at RGB variants).

Static teach-in: light/dark setting is defined using teach-in sequence.

Dynamic teach-in: switching output active on mark, if background is longer in the field of view during the teach-in.


The switching threshold is set in the center between the background and the mark.

Keylock (activation and deactivation): Press and hold the "+" pushbutton > 10 s.

The Q-LED (yellow) flashes and the "Err" error message appears on the display.

Sensing distance Sensing distance 13 mm, light spot direction horizontal/vertical

Sensitivity in %

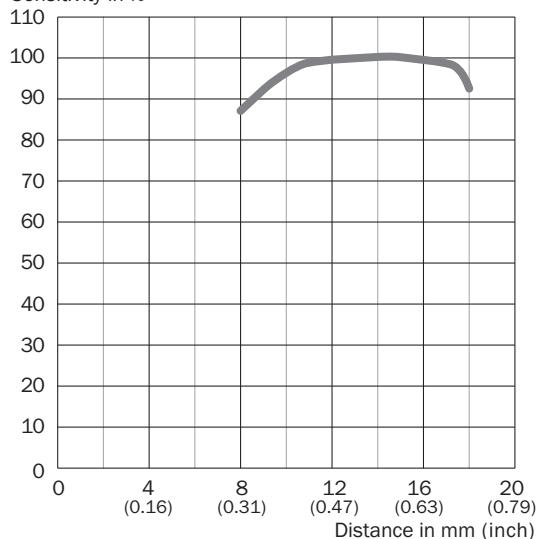

Recommended accessories

Other models and accessories → www.sick.com/KTX

	Brief description	Type	part no.
Mounting systems			
	<ul style="list-style-type: none"> Description: Plate G for universal clamp bracket Material: Steel Details: Steel, zinc coated Items supplied: Universal clamp (2022726), mounting hardware Usable for: W34, LUT3, KT5-2, KT10, CS8, W24-2, KT8, KT8 	BEF-KHS-G01	2022464
connectors and cables			
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 5-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 5 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones 	YF2A15-050VB5XLEAX	2096240
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 5-pin, straight, A-coded Description: Unshielded Connection systems: Screw-type terminals Permitted cross-section: ≤ 0.75 mm² Note: For field bus technology 	STE-1205-G	6022083

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com