



WLL180T-F232S01

WLL180

FIBER-OPTIC SENSORS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	part no.
WLL180T-F232S01	6041509

Included in delivery: BEF-WLL180 (1)

Other models and accessories → www.sick.com/WLL180

Detailed technical data

Features

Device type	Fiber-optic amplifier	
Device type detail	Expansion unit	
Functional principle detail	Depending on the optical fiber cable used	
Sensing range max.	Depending on the optical fiber cable used	
Emitted beam	Light source	LED
	Type of light	Visible red light
Key LED figures		
Normative reference	EN 62471:2008-09 IEC 62471:2006, modified	
LED risk group marking	Free group	
Wave length	650 nm	
Average service life	100,000 h at $T_a = +25$ °C	
Adjustment		
Wire/pin	For deactivating the sender and executing the test logic/for setting the sensing range/synchronization with input signal	
Display + operating buttons	For configuring the sensor parameters	
Display		
LED yellow	Status of digital outputPermanently on: Switching output activePermanently off: Digital output not active	
Display	Display of sensor functions	
Special features	Switching frequency with object: 90.9 Hz	
Items supplied	BEF-WLL180 mounting bracket	

Safety-related parameters

T_M (mission time)	20 years
-------------------------------------	----------

Electronics

Supply voltage U_B	12 V DC ... 24 V DC ¹⁾
Ripple	$\leq 10\%$ ²⁾
Current consumption	$\leq 50\text{ mA}$ ³⁾
Protection class	III
Digital output	
Number	1
Type	PNP ⁴⁾
Switching mode	Light/dark switching
Switching mode selector	Manually selectable
Circuit protection outputs	Reverse polarity protected
	Overcurrent protected
	Short-circuit protected
Response time	$\leq 16\text{ }\mu\text{s}$
	$\leq 70\text{ }\mu\text{s}$
	$\leq 250\text{ }\mu\text{s}$
	$\leq 2,000\text{ }\mu\text{s}$
	$\leq 8,000\text{ }\mu\text{s}$
Switching frequency	31.2 kHz
	7.1 kHz
	2 kHz
	250 Hz
	62.5 Hz
Time functions	Without time delay, off delay, switch-on delay, ON and OFF delay, one shot
Delay time	Programmable, 0 ms ... 9,999 ms
Pin/Wire assignment	
Function of pin 4/black (BK)	Digital output, received light → Output Q1 HIGH
Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured
Function of pin 2/white (WH)	Teach-in input
Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured

1) $\pm 10\%$.

2) May not fall below or exceed U_y tolerances.

3) Without load.

4) Selectable via menu.

Mechanics

Housing	Rectangular
Dimensions (W x H x D)	10.5 mm x 34.6 mm x 71.9 mm
Connection	Cable, 2-wire
Connection detail	
Deep-freeze property	Do not bend below 0 °C
Conductor size	0.2 mm ²
Length of cable (L)	2 m

Material	
Housing	Plastic, ABS/PC
Cable	Plastic, PVC
Weight	25 g

Ambient data

Enclosure rating	IP50 (EN 60529)
Ambient operating temperature	-25 °C ... +55 °C ¹⁾
Ambient temperature, storage	-25 °C ... +70 °C
Typ. Ambient light immunity	Artificial light: ≤ 3,000 lx Sunlight: ≤ 10,000 lx
Shock resistance	50 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 55 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % ... 85 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
RoHS certificate	✓

¹⁾ Operating temperature fluctuates according to number of devices connected: 4–8 devices: -25 °C ... +50 °C (output current 50 mA) / 9–16 devices: -25 °C ... +45 °C (output current 20 mA).

Smart Task

Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot) Switch-on delay and pulse
-----------------------	--

Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China-RoHS	✓
Photobiological safety (DIN EN 62471) certificate	✓

Classifications

ECLASS 5.0	27270905
ECLASS 5.1.4	27270905
ECLASS 6.0	27270905
ECLASS 6.2	27270905
ECLASS 7.0	27270905
ECLASS 8.0	27270905
ECLASS 8.1	27270905
ECLASS 9.0	27270905
ECLASS 10.0	27270905
ECLASS 11.0	27270905


ECLASS 12.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
ETIM 7.0	EC002651
ETIM 8.0	EC002651
UNSPSC 16.0901	39121528

Adjustments WLL180




- ③ Locking the fiber-optic cables
- ⑦ LED indicator orange, lights up when switching output is active
- ⑧ Numeric display 2 x 4-digit; green: switching threshold, operating mode; red: actual value, Teach-in and function parameter
- ⑨ step pushbutton > (manual switching threshold: higher/next function parameter)
- ⑩ step pushbutton < (manual switching threshold: lower/previous function parameter)
- ⑪ Mode/Enter-button
- ⑫ Teach-in button

Connection type




Connection diagram Cd-138



*) Only base unit

Dimensional drawing Expansion unit

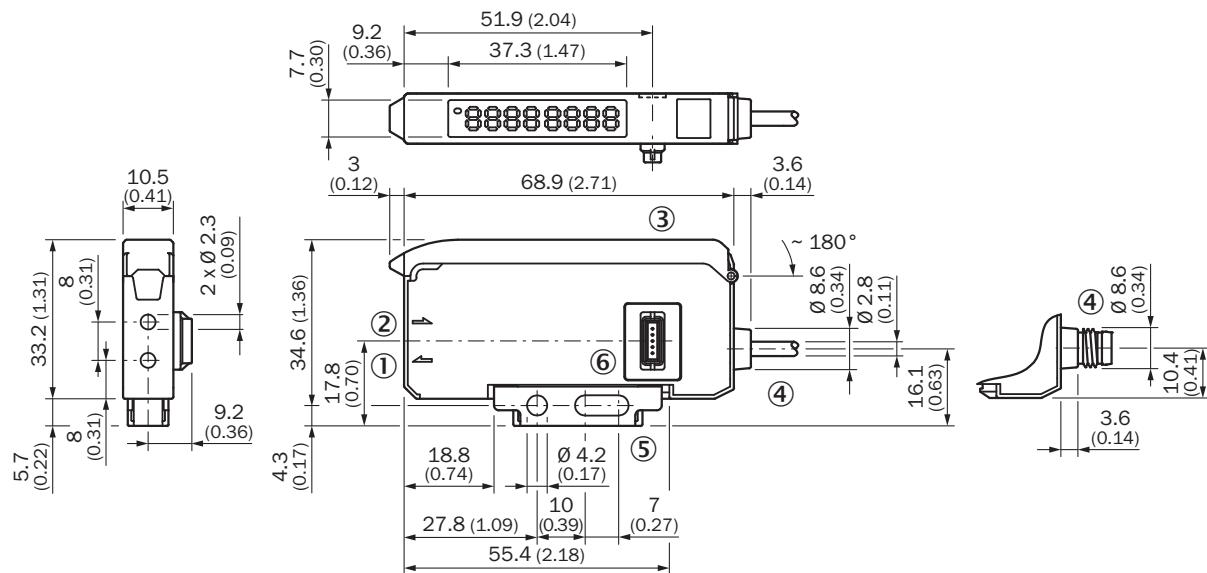

Dimensions in mm (inch)

- ① Sender LED, installation of LL3 fibre-optic cable (sender fibre)
- ② Receiver, installation of LL3 fibre optic cable (receiver fibre)
- ③ protective hood opens approx. 180°
- ④ Connection
- ⑤ Mounting bracket, included with delivery
- ⑥ bus connector

Recommended accessories

Other models and accessories → www.sick.com/WLL180

	Brief description	Type	part no.
fiber-optic sensors			
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), KTL180• Functional principle: Proximity system• Fiber length: 2,000 mm• Thread diameter (housing): M6• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel• Included with delivery: Mounting, 2 x M6 hexagon nut, 2 x washer, FC fiber cutter (5304141)	LL3-DB01	5308074
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T)• Functional principle: Proximity system• Fiber length: 2,000 mm• Thread diameter (housing): M3• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel• Included with delivery: Mounting, 2 x M3 hexagon nut, 2 x washer, adapter sleeves, BF-WLL160-13 (1.3 mm) adapter sleeves, FC fiber cutter (5304141)	LL3-DT01	5308076
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T)• Functional principle: Proximity system• Fiber length: 2,000 mm• Smooth sleeve diameter: 3 mm• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel• Included with delivery: Adapter sleeves, 1 x BF-WLL160-10 (1.0 mm) adapter sleeve, 1 x BF-WLL160-13 (1.3 mm) adapter sleeve, FC fiber cutter (5304141)	LL3-DR11	5326000
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex• Functional principle: Proximity system• Fiber length: 2,000 mm• Thread diameter (housing): M6• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Plastic• Included with delivery: Mounting, 1 x M6 hexagon nut, FC fiber cutter (5304141)	LL3-DV05	5322549
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex• Functional principle: Proximity system• Fiber length: 2,000 mm• Thread diameter (housing): M6• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel• Included with delivery: Mounting, 2 x M6 hexagon nut, 2 x washer, FC fiber cutter (5304141)	LL3-DB02	5308083
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex, KTL180• Functional principle: Proximity system• Fiber length: 2,000 mm• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Plastic• Included with delivery: Adapter sleeves, BF-WLL160-10 (1.0 mm) adapter sleeves, FC fiber cutter (5304141)	LL3-DC38	5322472
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex• Functional principle: Through-beam system• Fiber length: 2,000 mm• Thread diameter (housing): M4• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel• Included with delivery: Mounting, 4 x M4 hexagon nut, 4 x washer, FC fiber cutter (5304141)	LL3-TB01	5308050
	<ul style="list-style-type: none">• For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex• Functional principle: Through-beam system• Fiber length: 20,000 mm• Thread diameter (housing): M12• Fiber material: Plastic• Jacket material: Plastic• Fiber head material: Stainless steel	LL3-TX01	5324173

	Brief description	Type	part no.
	<ul style="list-style-type: none"> Included with delivery: Mounting, 4 x M12 hexagon nut, FC fiber cutter (5304141), protective cladding for fiber head For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex Functional principle: Through-beam system Fiber length: 2,000 mm Thread diameter (housing): M4 Fiber material: Plastic Jacket material: Plastic Fiber head material: Plastic Included with delivery: Mounting, 2 x M4 hexagon nut, FC fiber cutter (5304141) 	LL3-TV05	5322546
	<ul style="list-style-type: none"> For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex Functional principle: Through-beam system Fiber length: 2,000 mm Optical fiber head array width: 40 mm Fiber material: Plastic Jacket material: Plastic Fiber head material: Plastic Included with delivery: Mounting, 4 x M3 Phillips-head screw, FC fiber cutter (5304141), protective cladding for fiber head 	LL3-TS40	5323971
	<ul style="list-style-type: none"> For fiber optic amplifiers: WLL80, WLL180, GLL170(T), WLL24 Ex Functional principle: Through-beam system Fiber length: 2,000 mm Smooth sleeve diameter: 6 mm Fiber material: Plastic Jacket material: Chemical-resistant plastic Fiber head material: Chemical-resistant plastic Included with delivery: FC fiber cutter (5304141) 	LL3-TY01	5308066

integration modules and adapters

	<ul style="list-style-type: none"> Description: EtherCAT coupler for WLL180T, KTL180 and AOD1. Features: EtherCAT; transmission rates of up to 100 Mbaud; M12 EtherCAT connection; M8 voltage supply connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details 	WI180C-EC	6068089
	<ul style="list-style-type: none"> Description: PROFINET coupler for WLL180T, KTL180 and AOD1. Features: PROFINET IRT; transmission rates 10 Mbaud – 100 Mbaud; M12 PROFINET connection; M8 voltage supply connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details 	WI180C-PN	6068088
	<ul style="list-style-type: none"> Description: IO-Link Smart Sensor Gateway for WLL180T, KTL180 and AOD1; Features: IO-Link; COM3; M8 connection, 4-pin; full read/write functionality for the process and service data of the connected sensors. See operating instructions for additional information and technical details 	WI180C-IOA00	6071650

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com