

## Filter Fan



## Description

|                            |                                               |
|----------------------------|-----------------------------------------------|
| <b>Order Number:</b>       | 4411A3000                                     |
| <b>Colour:</b>             | RAL 7035                                      |
| <b>Housing Material:</b>   | ABS Plastic                                   |
| <b>Ingress Protection:</b> | IP 54, Type 12, 3R                            |
| <b>Optional:</b>           | Different housing colors available on request |
| <b>Approvals:</b>          | CE, cURus, cULus, CSA                         |

### Accessories:



[Hose-proof protection hood FC 4000 200](#)



[Hose-proof protection hood FC 4000 200 FDA](#)



[Adjustable Thermostat NO](#)

## Technical Data


|                                     |                        |
|-------------------------------------|------------------------|
| <b>Operating Temperature Range:</b> | -10°C - 55°C           |
| <b>Air flow unimpeded:</b>          | 130 m³/h               |
| <b>Static pressure:</b>             | 100 Pa                 |
| <b>Dimensions A x B x C (D+E):</b>  | 204 x 204 x 95.5 mm    |
| <b>Weight:</b>                      | 1.2 kg                 |
| <b>Cut out dimensions:</b>          | 177 x 177 (+1.5) mm    |
| <b>Voltage / Frequency:</b>         | 120 V ~ 60 Hz          |
| <b>Rated current:</b>               | 0.18 A                 |
| <b>Power consumption:</b>           | 15 W                   |
| <b>Degree of separation:</b>        | 85% - DIN 24185        |
| <b>Wall thickness:</b>              | 1 - 2.1 mm             |
| <b>Filter class:</b>                | G3 according to EN 779 |
| <b>Installation:</b>                | Elastic clips          |
| <b>Noise level:</b>                 | 44 dB(A)               |

Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview Product Group Filter fans & exhaust filters](#)

### Air flow:


Q = Air flow [m<sup>3</sup>/h]

P = Static pressure [Pa]

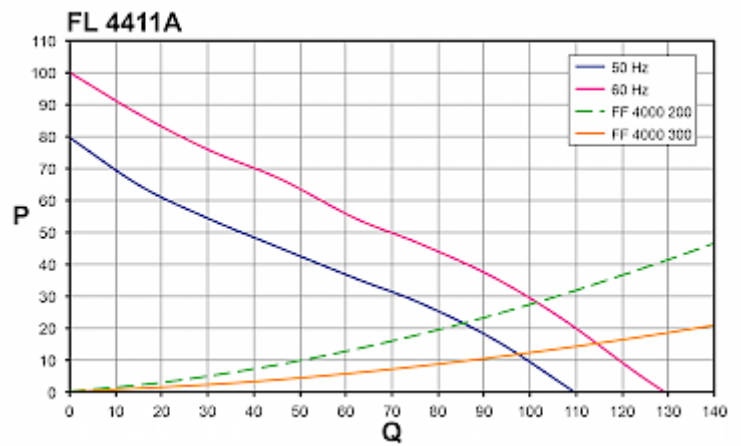

[click image to enlarge](#)

### Cut Out Dimension:

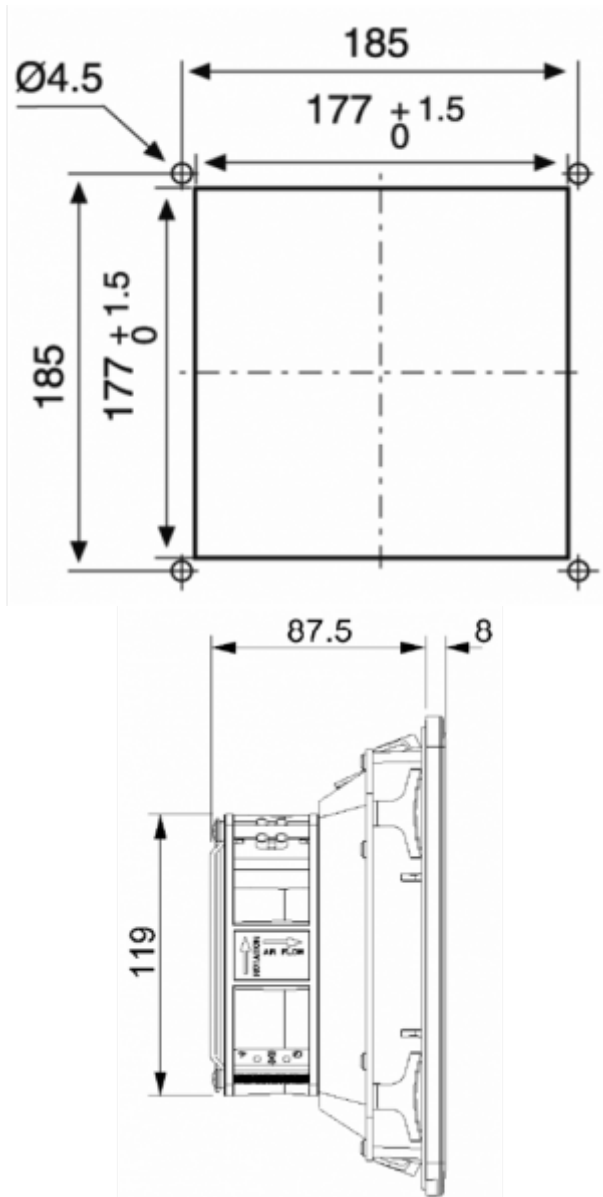

[click image to enlarge](#)

## Order Information

|                                         |               |
|-----------------------------------------|---------------|
| <b>In RAL 9005</b>                      | 4411A3003     |
| <b>With TYPE 3R protection part no.</b> | 4411A3033     |
| <b>Taric code</b>                       | 84145915      |
| <b>GTIN (EAN)</b>                       | 5350604100350 |