



SEMITOP® 3

IGBT Module

SK10GD12T4ET

Features

- One screw mounting module
- Trench4 IGBT technology
- CAL4 technology FWD
- Integrated NTC temperature sensor


Typical Applications*

Remarks

- $V_{CE,sat}$, V_F = chip level value

Absolute Maximum Ratings		$T_s = 25^\circ\text{C}$, unless otherwise specified		
Symbol	Conditions	Values		Units
IGBT				
V_{CES}	$T_j = 25^\circ\text{C}$	1200		V
I_C	$T_j = 175^\circ\text{C}$ $T_s = 25^\circ\text{C}$ $T_s = 70^\circ\text{C}$	17	A	
		15	A	
I_{CRM}	$I_{CRM} = 3 \times I_{Cnom}$	24		A
V_{GES}		± 20		V
t_{psc}	$V_{CC} = 800\text{ V}$; $V_{GE} \leq 15\text{ V}$; $T_j = 150^\circ\text{C}$ $V_{CES} < 1200\text{ V}$	10		μs
Inverse Diode				
I_F	$T_j = 175^\circ\text{C}$ $T_s = 25^\circ\text{C}$ $T_s = 70^\circ\text{C}$	15	A	
		12	A	
I_{FRM}	$I_{FRM} = 3 \times I_{Fnom}$	24		A
Module				
$I_{t(RMS)}$				A
T_{vj}		-40 ... +175		$^\circ\text{C}$
T_{stg}		-40 ... +125		$^\circ\text{C}$
V_{isol}	AC, 1 min.	2500		V

Characteristics		$T_s = 25^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 0,3\text{ mA}$	5	5,8	6,5	V
I_{CES}	$V_{GE} = 0\text{ V}$, $V_{CE} = V_{CES}$ $T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$			1,0	mA
I_{GES}	$V_{CE} = 0\text{ V}$, $V_{GE} = 20\text{ V}$ $T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$		120		nA
V_{CEO}		1,1	1,3		V
	$T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	1	1,2		V
r_{CE}	$V_{GE} = 15\text{ V}$ $T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	93,8			$\text{m}\Omega$
		156			$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 8\text{ A}$, $V_{GE} = 15\text{ V}$ $T_j = 25^\circ\text{C}_{\text{chilev.}}$ $T_j = 150^\circ\text{C}_{\text{chilev.}}$	1,85	2,05		V
		2,25	2,45		V
C_{ies} C_{oes} C_{res}	$V_{CE} = 25$, $V_{GE} = 0\text{ V}$ $f = 1\text{ MHz}$	0,49			nF
		0,05			nF
		0,03			nF
Q_G	$V_{GE} = -7\text{ V} \dots +15\text{ V}$	37,5			nC
$t_{d(on)}$ t_r E_{on}	$R_{Gon} = 32\text{ }\Omega$ $di/dt = 1375\text{ A}/\mu\text{s}$	$V_{CC} = 600\text{ V}$ $I_C = 8\text{ A}$	16		ns
			14		ns
			0,41		mJ
$t_{d(off)}$ t_f E_{off}	$R_{Goff} = 32\text{ }\Omega$ $di/dt = 1375\text{ A}/\mu\text{s}$	$T_j = 150^\circ\text{C}$ $V_{GE} = \pm 15\text{ V}$	273		ns
			85		ns
			0,76		mJ
$R_{th(j-s)}$	per IGBT	2,2			K/W

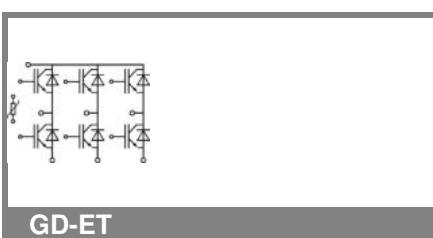

GD-ET



SEMITOP® 3

IGBT Module

SK10GD12T4ET

Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 8 \text{ A}$; $V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{\text{chiplev.}}$	2,38	2,71	V
		$T_j = 150 \text{ }^\circ\text{C}_{\text{chiplev.}}$	2,44	2,77	V
V_{FO}		$T_j = 25 \text{ }^\circ\text{C}$	1,3	1,5	V
		$T_j = 150 \text{ }^\circ\text{C}$	0,9	1,1	V
r_F		$T_j = 25 \text{ }^\circ\text{C}$	135	151,3	$\text{m}\Omega$
		$T_j = 150 \text{ }^\circ\text{C}$	192	208,8	$\text{m}\Omega$
I_{RRM}	$I_F = 8 \text{ A}$	$T_j = 150 \text{ }^\circ\text{C}$	15		A
Q_{rr}	$di/dt = 1375 \text{ A}/\mu\text{s}$		0,2		μC
E_{rr}	$V_{CC} = 600 \text{ V}$		0,41		mJ
$R_{th(j-s)D}$	per diode		2,7		K/W
M_s	to heat sink	2,25	2,5		Nm
w			30		g
Temperature sensor					
R_{100}	$T_s = 100 \text{ }^\circ\text{C}$ ($R_{25} = 5 \text{ k}\Omega$)		493 \pm 5%		Ω


Features

- One screw mounting module
- Trench4 IGBT technology
- CAL4 technology FWD
- Integrated NTC temperature sensor

Typical Applications*

Remarks

- $V_{CE,sat}$, V_F = chip level value

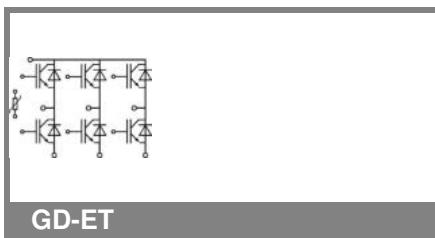

GD-ET

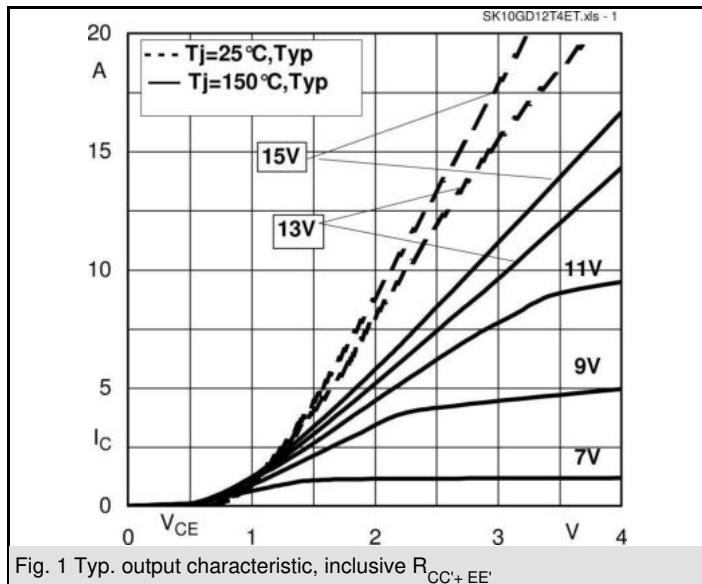


Fig. 1 Typ. output characteristic, inclusive $R_{CC} + EE'$

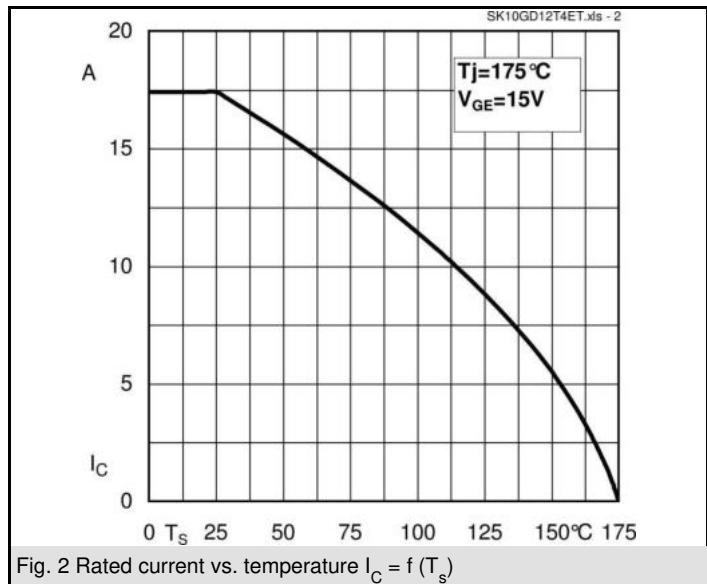


Fig. 2 Rated current vs. temperature $I_C = f(T_s)$

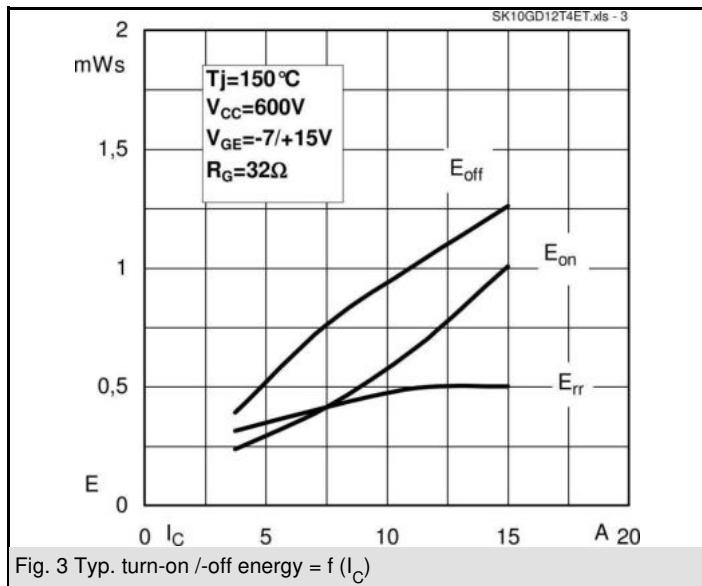


Fig. 3 Typ. turn-on /-off energy = f (I_C)

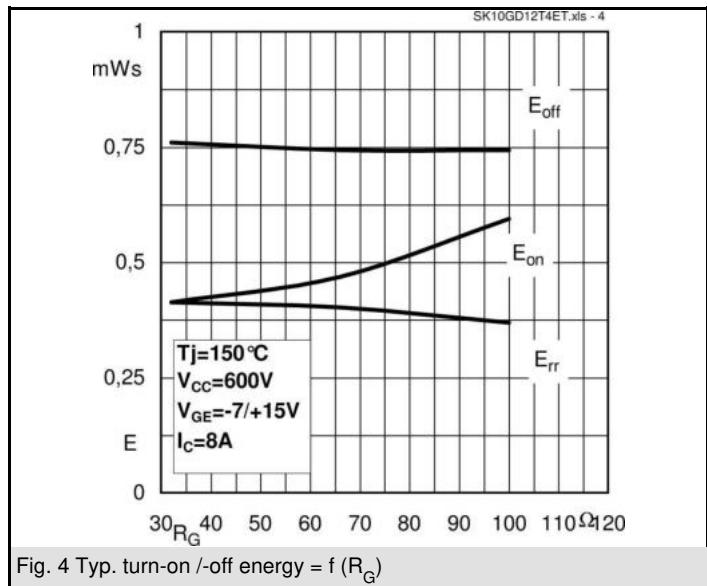


Fig. 4 Typ. turn-on /-off energy = f (R_G)

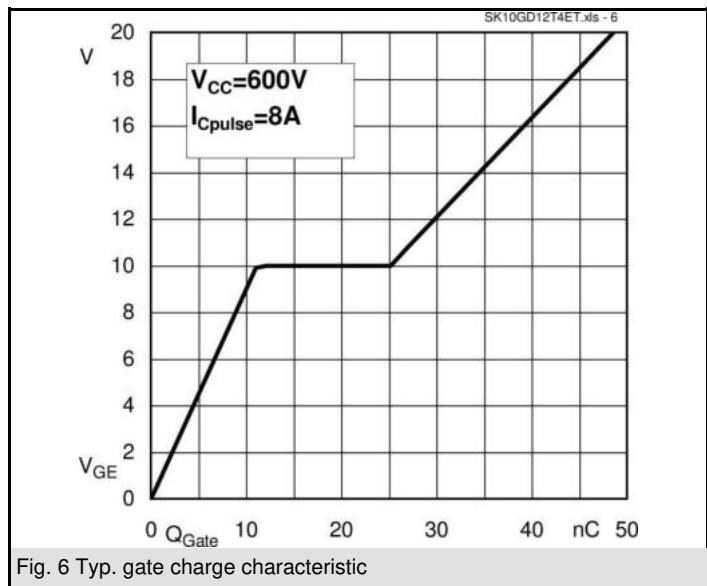


Fig. 6 Typ. gate charge characteristic

SK10GD12T4ET

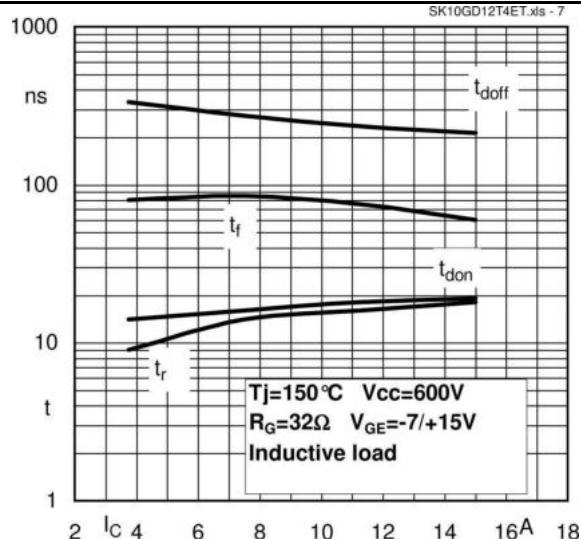


Fig. 7 Typ. switching times vs. I_C

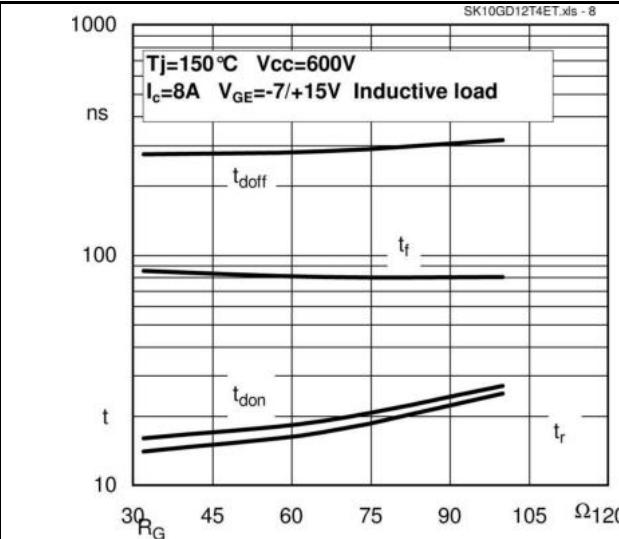


Fig. 8 Typ. switching times vs. gate resistor R_G



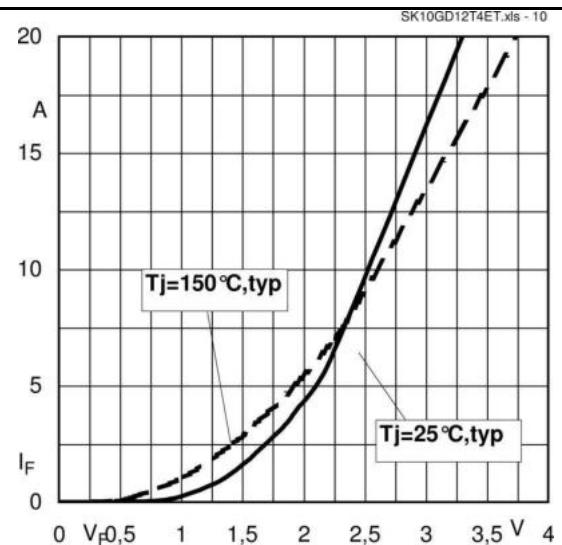


Fig. 10 CAL diode forward characteristic

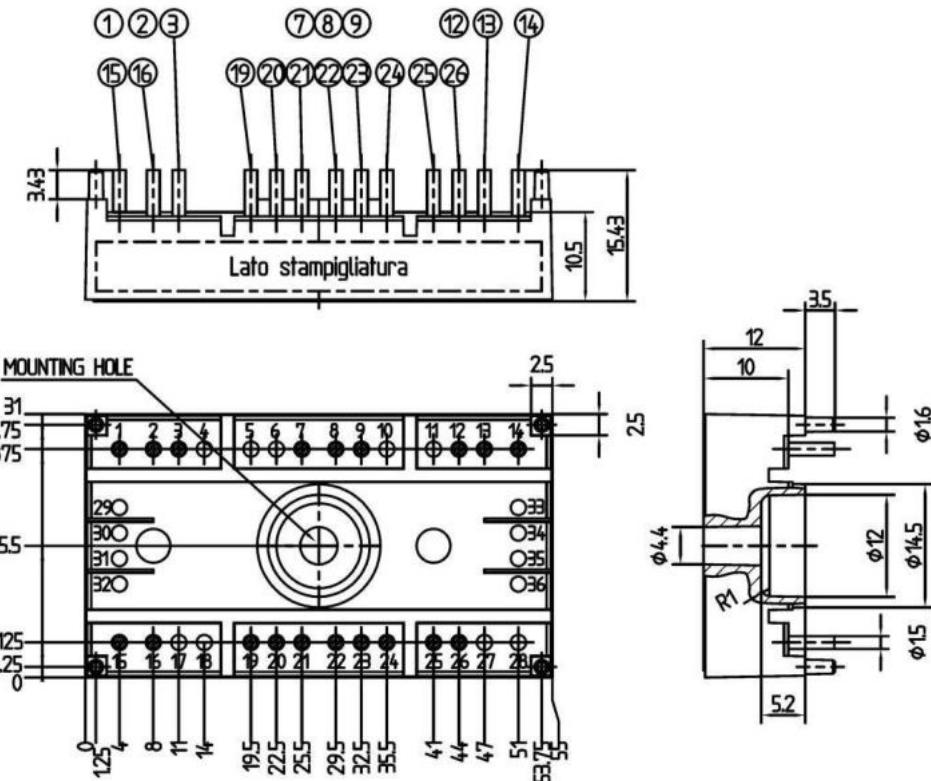

Case T52 (Suggested hole diameter for solder pins and plastic mounting pins: 2mm)

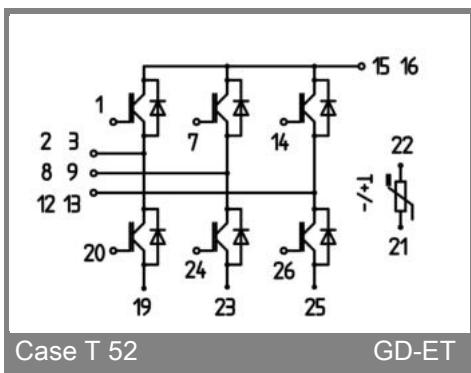

Case T 52

GD-ET

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, chapter IX.

*IMPORTANT INFORMATION AND WARNINGS

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.