



SEMIPONT® 2

Controllable Bridge Rectifiers

SKDH 100

Features

- Fully controlled three phase bridge rectifier
- Robust plastic case with screw terminals
- Large, isolated base plate
- Blocking voltage to 1400V
- High surge currents
- Easy chassis mounting
- UL recognized, file no. E 63 532


Typical Applications*

- For DC drives with a fixed direction of rotation
- Controlled field rectifiers for DC motors
- Controlled battery charger rectifiers

1) Painted metal shield of minimum 250 x 250 x 1 mm: $R_{th(c-a)} = 1,8 \text{ K/W}$

V_{RSM}	V_{RRM}, V_{DRM}	$I_D = 100 \text{ A}$ (full conduction) ($T_c = 84^\circ\text{C}$)
V	V	$SKDH 100/08$
800	800	$SKDH 100/12$
1200	1200	$SKDH 100/14$
1400	1400	

Symbol	Conditions	Values	Units
I_D	$T_c = 85^\circ\text{C}$ $T_a = 45^\circ\text{C}$; chassis ¹⁾ $T_a = 45^\circ\text{C}$; P13A/125 $T_a = 45^\circ\text{C}$; P1A/120	98 20 25 45	A A A A
I_{TSM}, I_{FSM}	$T_{vj} = 25^\circ\text{C}$; 10 ms $T_{vj} = 125^\circ\text{C}$; 10 ms	1000 850	A A
i^2t	$T_{vj} = 25^\circ\text{C}$; 8,3 ... 10 ms $T_{vj} = 125^\circ\text{C}$; 8,3 ... 10 ms	5000 3600	A ² s A ² s
V_T	$T_{vj} = 25^\circ\text{C}$; $I_T = 200 \text{ A}$	max. 1,95	V
$V_{T(TO)}$	$T_{vj} = 125^\circ\text{C}$;	max. 1	V
r_T	$T_{vj} = 125^\circ\text{C}$	max. 4,5	mΩ
I_{DD}, I_{RD}	$T_{vj} = 125^\circ\text{C}$; $V_{DD} = V_{DRM}$; $V_{RD} = V_{RRM}$	max. 15	mA
t_{gd}	$T_{vj} = 25^\circ\text{C}$; $I_G = 1 \text{ A}$; $di_G/dt = 1 \text{ A}/\mu\text{s}$	1	μs
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	1	μs
$(dv/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$	max. 500	V/μs
$(di/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$; $f = 50 \text{ Hz}$	max. 50	A/μs
t_q	$T_{vj} = 125^\circ\text{C}$; typ.	80	μs
I_H	$T_{vj} = 25^\circ\text{C}$; typ. / max.	100 / 200	mA
I_L	$T_{vj} = 25^\circ\text{C}$; $R_G = 33 \Omega$	250 / 400	mA
V_{GT}	$T_{vj} = 25^\circ\text{C}$; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25^\circ\text{C}$; d.c.	min. 150	mA
V_{GD}	$T_{vj} = 125^\circ\text{C}$; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 125^\circ\text{C}$; d.c.	max. 5	mA
$R_{th(j-c)}$	per thyristor / diode	0,85	K/W
	total	0,141	K/W
$R_{th(c-s)}$	total	0,05	K/W
T_{vj}		- 40 ... + 125	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 (3000)	V
M_s	to heatsink	5	Nm
M_t	to terminals	3	Nm
m		165	g
Case	SKDH	G 53	

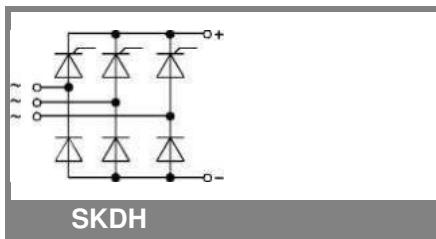

SKDH 100

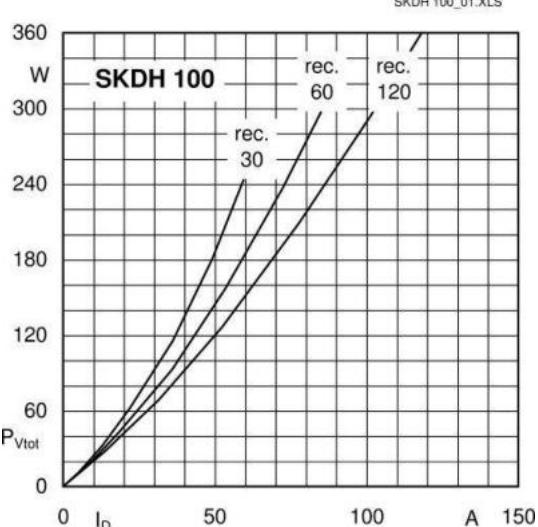


Fig. 1 Power dissipation vs. output current

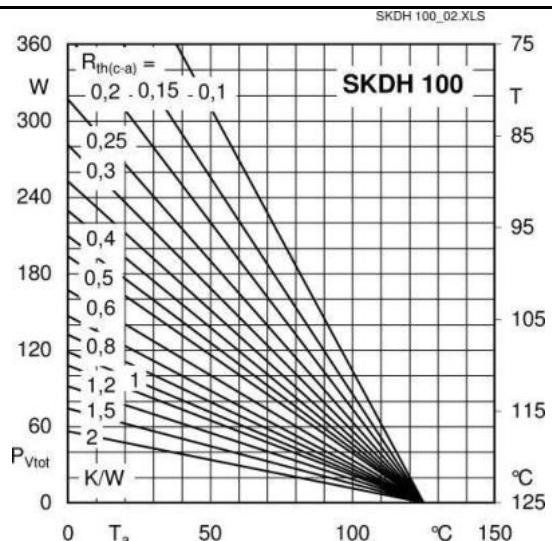


Fig. 2 Power dissipation vs. case temperature

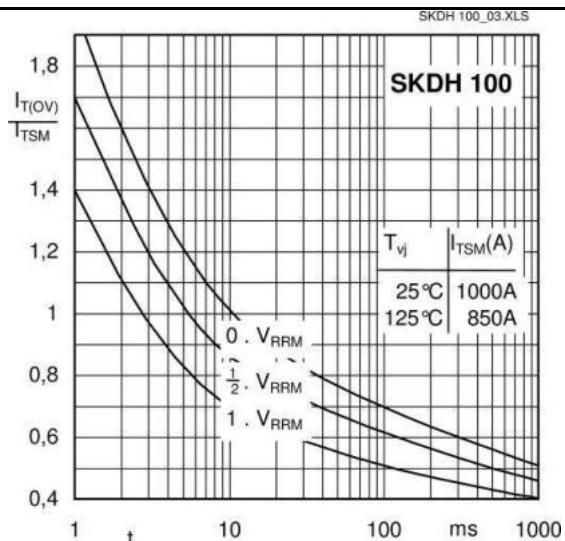


Fig. 5 Surge overload characteristics vs. time

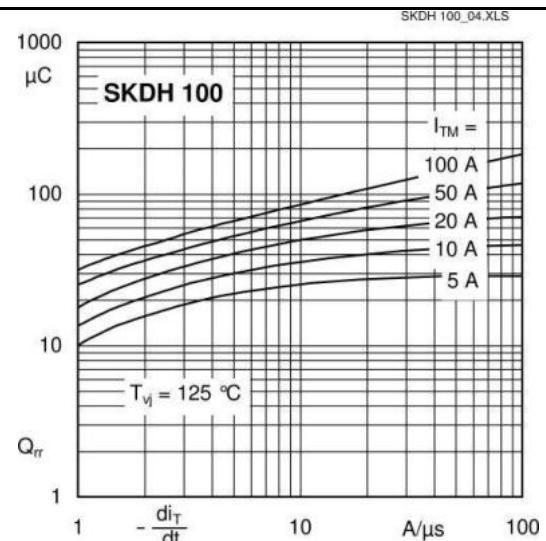


Fig. 8 Recovered charge vs. current decrease

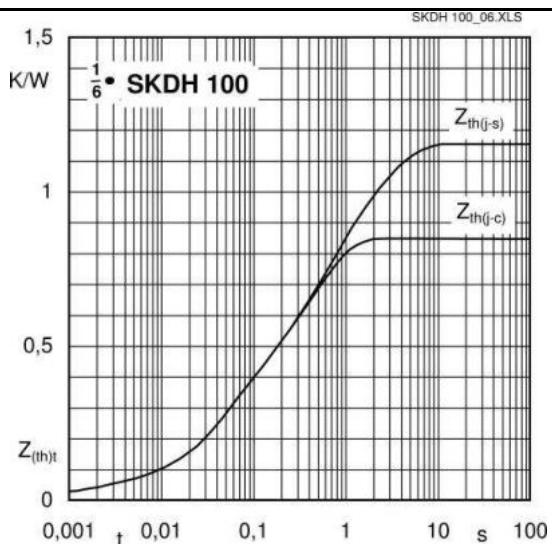


Fig. 12 Transient thermal impedance vs. time


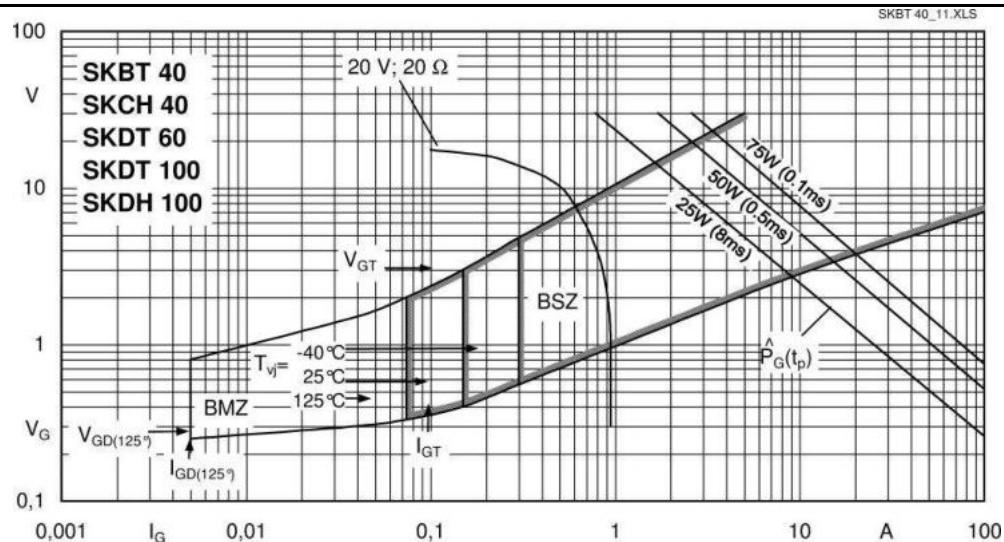


Fig. 11 Gate characteristics of a thyristor device

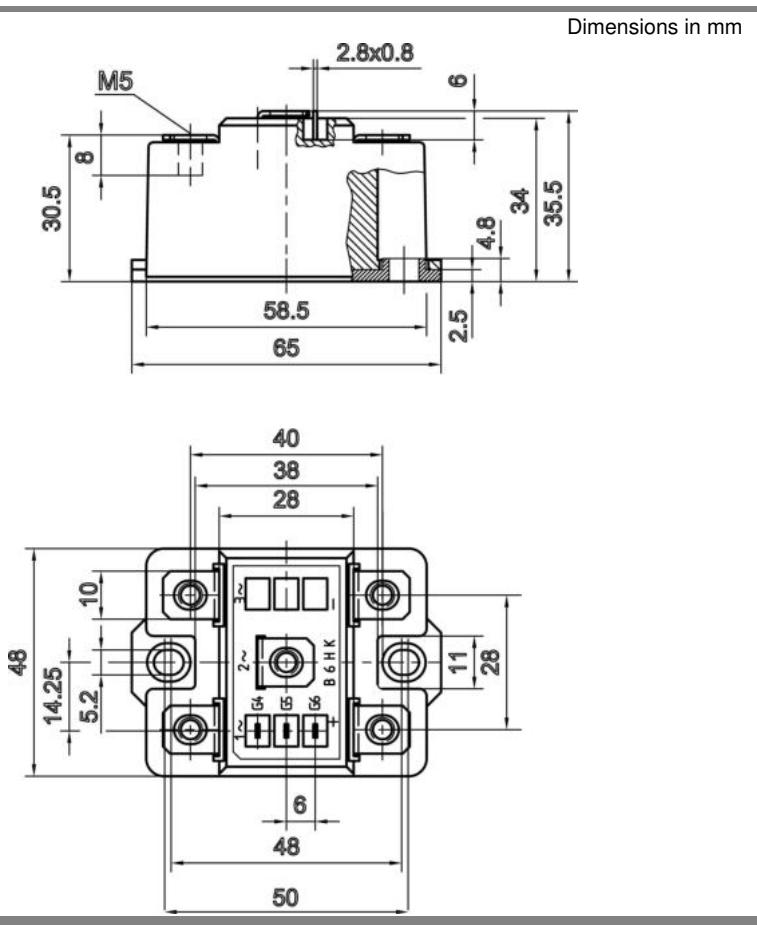

Case G 53

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.