



**SEMIPACK® 1**

## Thyristor / Diode Modules

### SKKT 92

### SKKT 92B

### SKKH 92

### Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532


### Typical Applications\*

- DC motor control (e. g. for machine tools)
- AC motor soft starters
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

1) See the assembly instructions







| $V_{RSM}$<br>V | $V_{RRM}, V_{DRM}$<br>V | $I_{TRMS} = 150$ A (maximum value for continuous operation)<br>$I_{TAV} = 95$ A (sin. 180; $T_c = 85$ °C) |             |             |
|----------------|-------------------------|-----------------------------------------------------------------------------------------------------------|-------------|-------------|
| 900            | 800                     | SKKT 92/08E                                                                                               | SKKT 92B08E | SKKH 92/08E |
| 1300           | 1200                    | SKKT 92/12E                                                                                               | SKKT 92B12E | SKKH 92/12E |
| 1500           | 1400                    | SKKT 92/14E                                                                                               | SKKT 92B14E | SKKH 92/14E |
| 1700           | 1600                    | SKKT 92/16E                                                                                               | SKKT 92B16E | SKKH 92/16E |
| 1900           | 1800                    | SKKT 92/18E                                                                                               | SKKT 92B18E | SKKH 92/18E |

| Symbol           | Conditions                                              | Values                 | Units |
|------------------|---------------------------------------------------------|------------------------|-------|
| $I_{TAV}$        | sin. 180; $T_c = 85$ (100) °C;                          | 95 (68 )               | A     |
| $I_D$            | P3/180; $T_a = 45$ °C; B2 / B6                          | 70 / 85                | A     |
|                  | P3/180F; $T_a = 35$ °C; B2 / B6                         | 140 / 175              | A     |
| $I_{RMS}$        | P3/180F; $T_a = 35$ °C; W1 / W3                         | 190 / 3 * 135          | A     |
| $I_{TSM}$        | $T_{vj} = 25$ °C; 10 ms                                 | 2000                   | A     |
|                  | $T_{vj} = 125$ °C; 10 ms                                | 1750                   | A     |
| $i^2t$           | $T_{vj} = 25$ °C; 8,3 ... 10 ms                         | 20000                  | A²s   |
|                  | $T_{vj} = 125$ °C; 8,3 ... 10 ms                        | 15000                  | A²s   |
| $V_T$            | $T_{vj} = 25$ °C; $I_T = 300$ A                         | max. 1,65              | V     |
| $V_{T(TO)}$      | $T_{vj} = 125$ °C                                       | max. 0,9               | V     |
| $r_T$            | $T_{vj} = 125$ °C                                       | max. 2                 | mΩ    |
| $I_{DD}, I_{RD}$ | $T_{vj} = 125$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$ | max. 20                | mA    |
| $t_{gd}$         | $T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs       | 1                      | μs    |
| $t_{gr}$         | $V_D = 0,67 * V_{DRM}$                                  | 2                      | μs    |
| $(di/dt)_{cr}$   | $T_{vj} = 125$ °C                                       | max. 150               | A/μs  |
| $(dv/dt)_{cr}$   | $T_{vj} = 125$ °C                                       | max. 1000              | V/μs  |
| $t_q$            | $T_{vj} = 125$ °C                                       | 100                    | μs    |
| $I_H$            | $T_{vj} = 25$ °C; typ. / max.                           | 150 / 250              | mA    |
| $I_L$            | $T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max.             | 300 / 600              | mA    |
| $V_{GT}$         | $T_{vj} = 25$ °C; d.c.                                  | min. 3                 | V     |
| $I_{GT}$         | $T_{vj} = 25$ °C; d.c.                                  | min. 150               | mA    |
| $V_{GD}$         | $T_{vj} = 125$ °C; d.c.                                 | max. 0,25              | V     |
| $I_{GD}$         | $T_{vj} = 125$ °C; d.c.                                 | max. 6                 | mA    |
| $R_{th(j-c)}$    | cont.; per thyristor / per module                       | 0,28 / 0,14            | K/W   |
| $R_{th(j-c)}$    | sin. 180; per thyristor / per module                    | 0,3 / 0,15             | K/W   |
| $R_{th(j-c)}$    | rec. 120; per thyristor / per module                    | 0,32 / 0,16            | K/W   |
| $R_{th(c-s)}$    | per thyristor / per module                              | 0,2 / 0,1              | K/W   |
| $T_{vj}$         |                                                         | - 40 ... + 125         | °C    |
| $T_{stg}$        |                                                         | - 40 ... + 125         | °C    |
| $V_{isol}$       | a. c. 50 Hz; r.m.s.; 1 s / 1 min.                       | 3600 / 3000            | V~    |
| $M_s$            | to heatsink                                             | 5 ± 15 % <sup>1)</sup> | Nm    |
| $M_t$            | to terminals                                            | 3 ± 15 %               | Nm    |
| $a$              |                                                         | 5 * 9,81               | m/s²  |
| $m$              | approx.                                                 | 95                     | g     |
| Case             | SKKT                                                    | A 46                   |       |
|                  | SKKT ...B                                               | A 48                   |       |
|                  | SKKH                                                    | A 47                   |       |

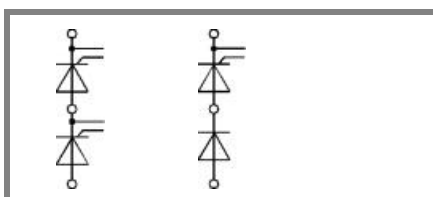

**SKKT**

**SKKH**

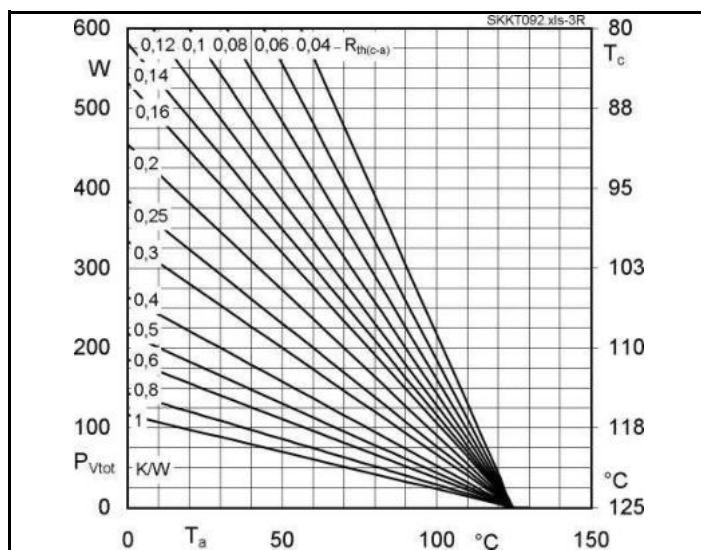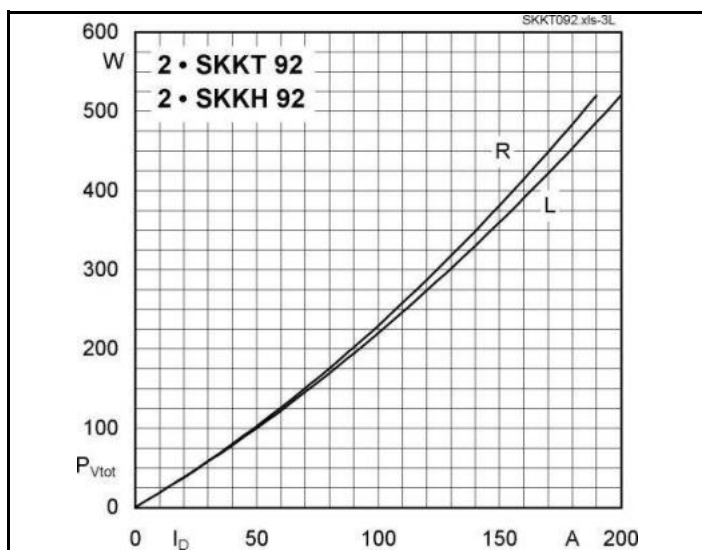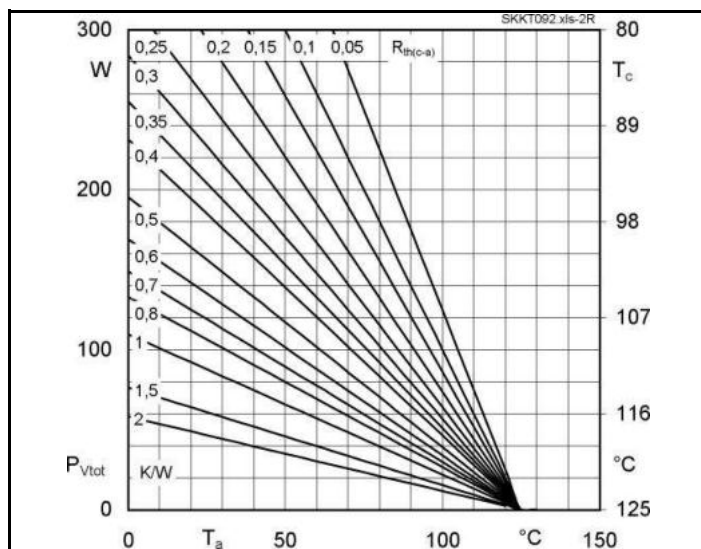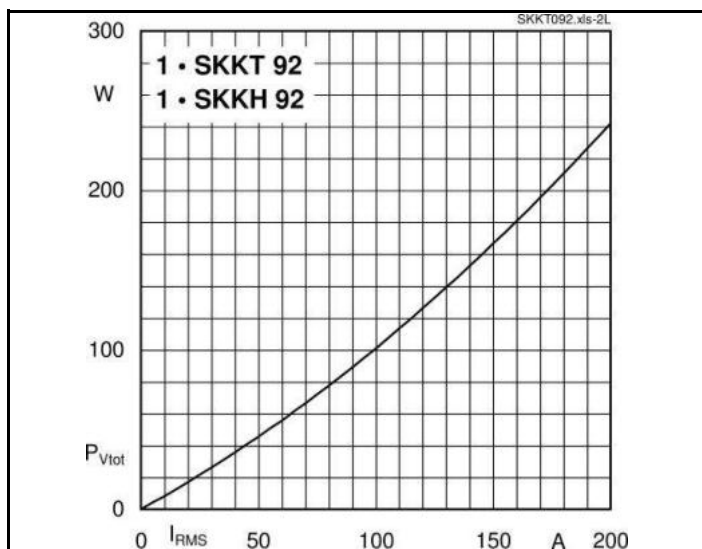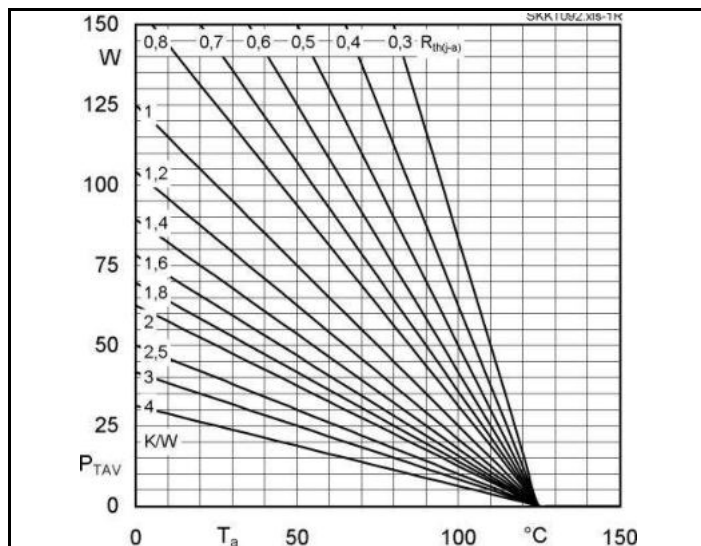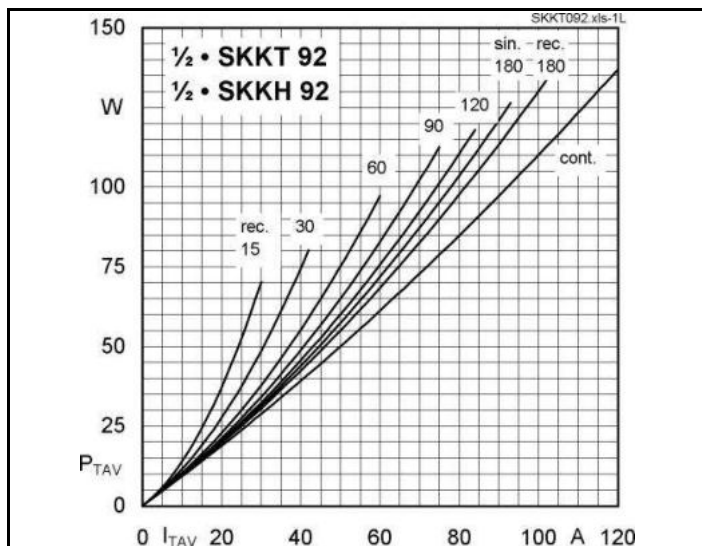

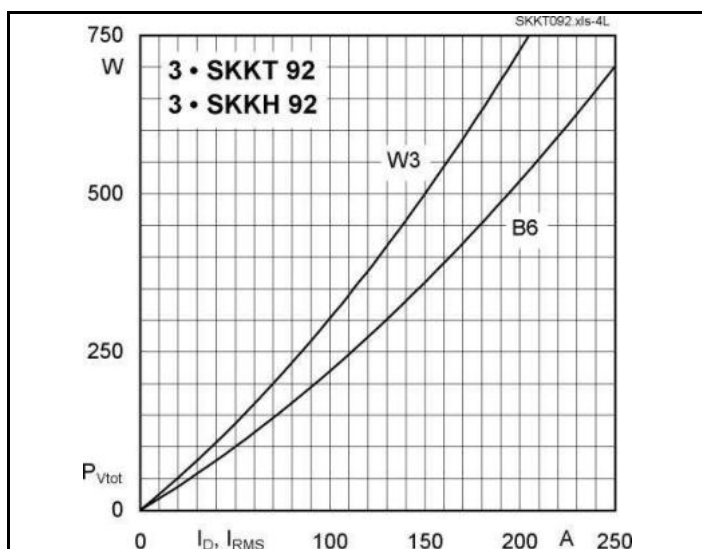


Fig. 4L Power dissipation of three modules vs. direct and rms current

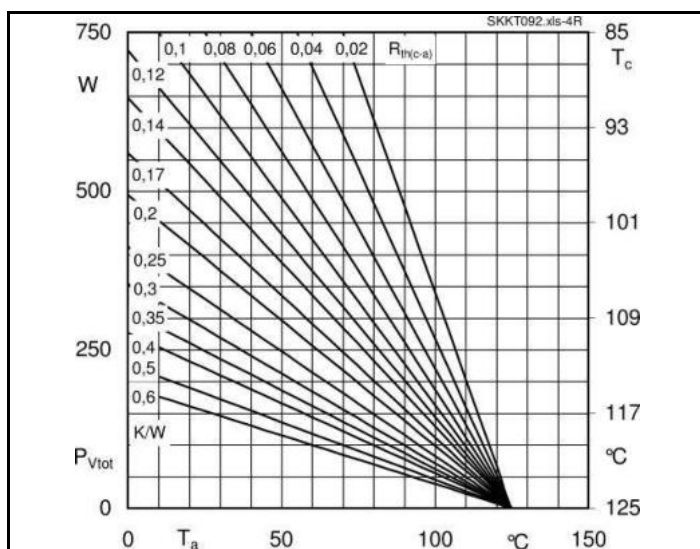


Fig. 4R Power dissipation of three modules vs. case temp.

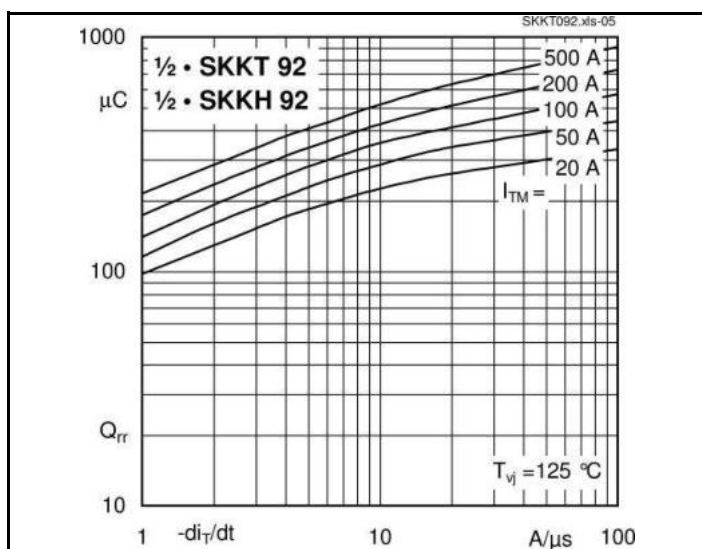


Fig. 5 Recovered charge vs. current decrease

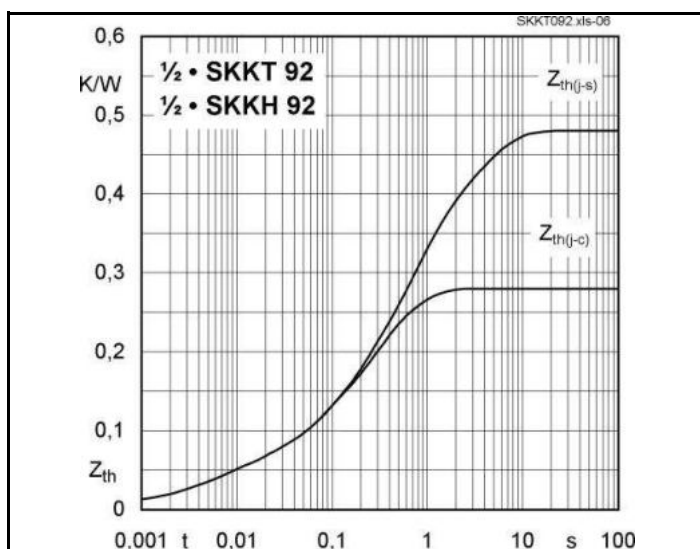


Fig. 6 Transient thermal impedance vs. time

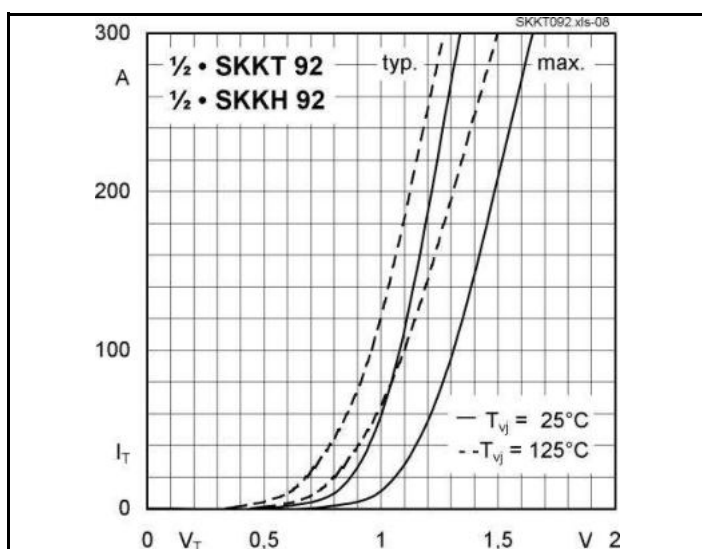


Fig. 7 On-state characteristics

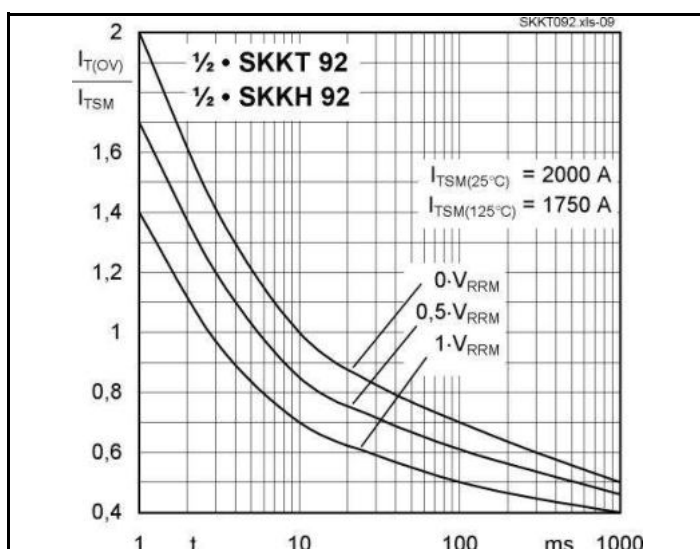


Fig. 8 Surge overload current vs. time





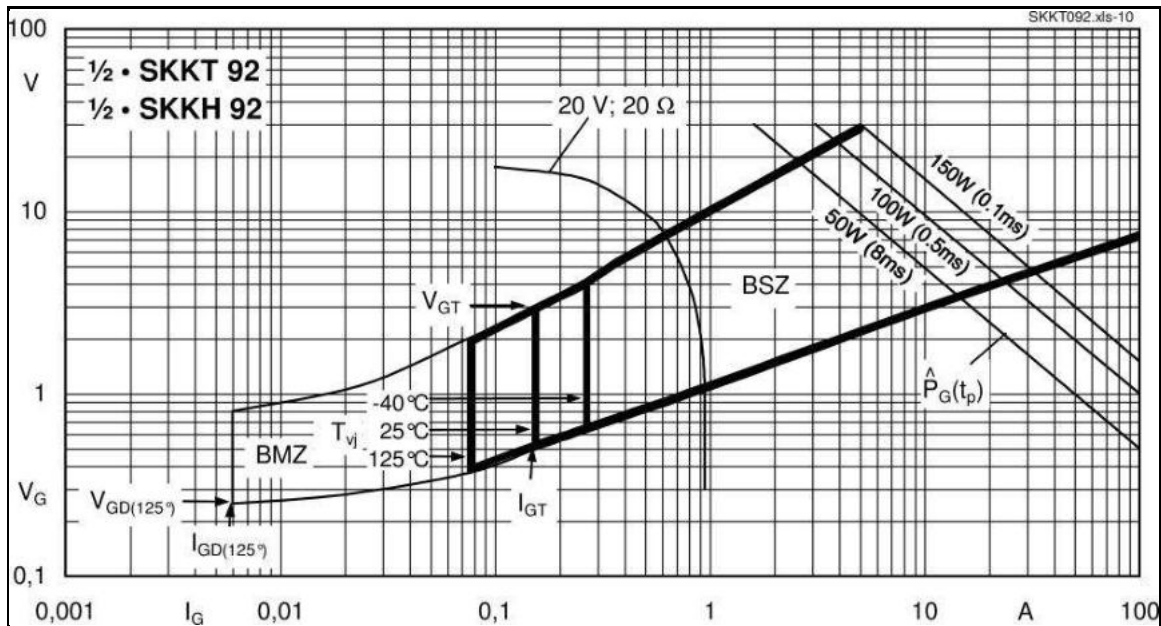


Fig. 9 Gate trigger characteristics

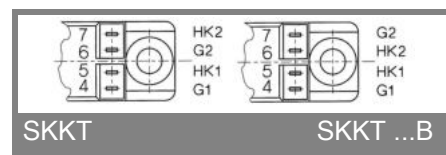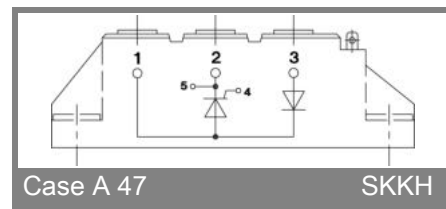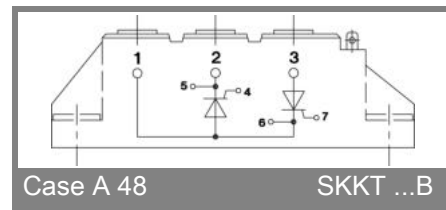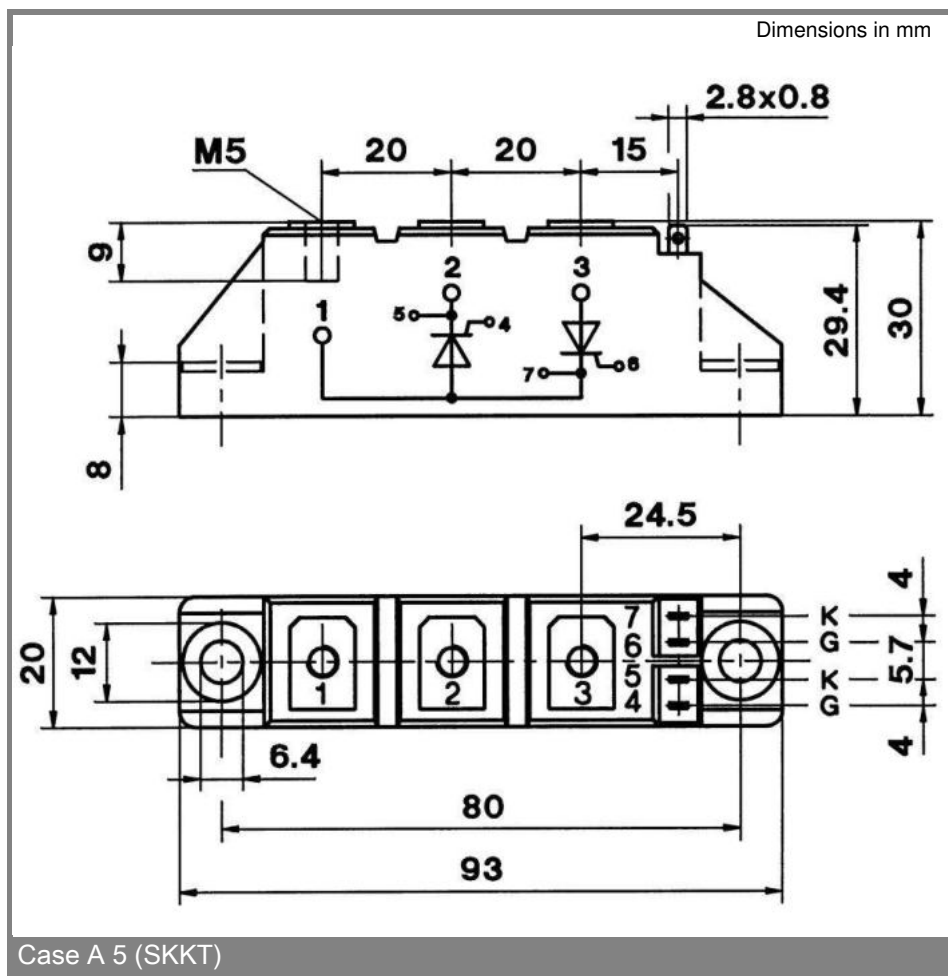

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.