

Glass Fiber-Optic Cable

Reflex Mode

081-207-202

Part Number



Technical Data

Optical Data

Fiber Bundle Diameter	0,8 mm
Range with Sensor Type U_88_	40 mm
Range with Sensor Type U_66_	20 mm
Range with Sensor Type U_55_	10 mm
Opening Angle	68 °
Fiber	Step Index
Fiber Diameter	50 µm
Fiber Distribution	statistical mixture

Mechanical Data

Temperature Range	-25...180 °C
Bending Radius	45 mm
Fiber-Optic Length	0,5 m
Jacket Material	CuZn, nickel-plated
Material End Sleeve	Stainless Steel
End Sleeve No.	7
Light Emission	straight

Fiber-Optic Cable Adapter No.


02

Suitable Mounting Technology No.

220

- A broad range of applications are possible due to the modular system design
- Stock types deliverable at short notice

Glass fiber optic cables are very flexible and can be used in applications with less space. Especially in applications with hot environment the metal casing fiber optic cables are the answer.

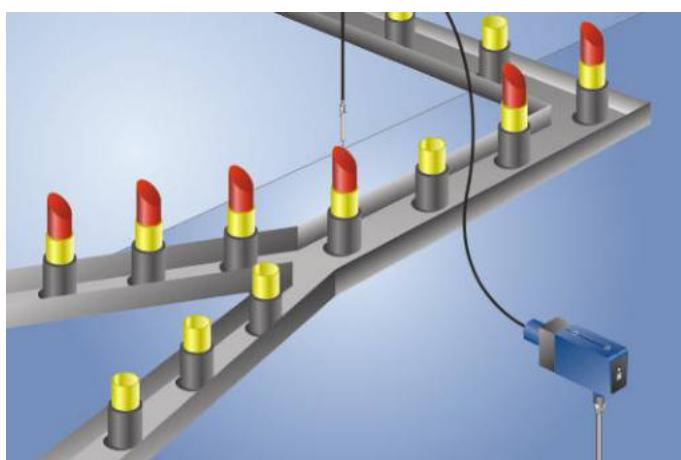

Fiber Optic Cable Combination

Choose your individual
Glass Fiber Optic Cable

1 First you have to choose the required range.
If you cannot find a suitable range please change to another Fiber bundle diameter. The range depends on the length of the Fiber optic cable and the switching range of the chosen wenglor sensor.

2 Choose the jacket and the endpoint.

3 Choose the right adapter for your wenglor sensor.

4 Choose the length of the Fiber arm (in 0,25 m steps).

