

# Flow Sensor

## FFAF022


Part Number



- **Display can be switched between flow and medium temperature**
- **Highest precision of its class**
- **Installation in any position**
- **Measurement independent of flow direction**
- **Simple operation via the display**
- **Temperature of the medium: 0 ... 100° C (140° C for 24 hours without current measurement)**

wenglor UniFlow flow sensors measure the flow rate of aqueous and oily media in closed piping systems.

UniFlow flow sensors are very easy to operate thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

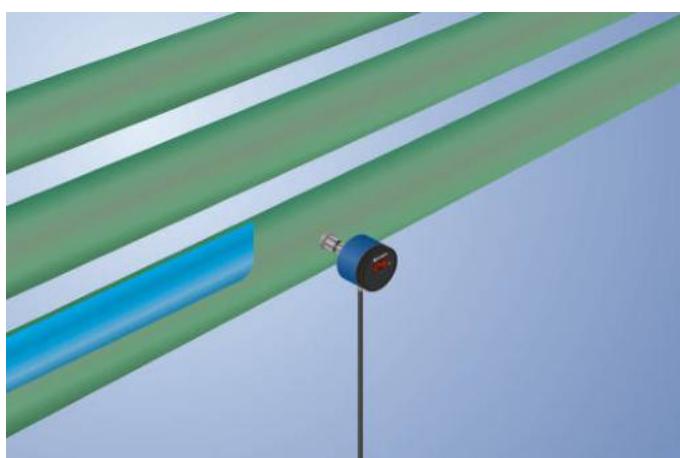

### Technical Data

#### Sensor-specific data

Selectable measuring range	10...300 cm/s
Measuring range 1	10...150 cm/s
Adjustable range 1	15...150 cm/s
Measuring range 2	20...300 cm/s
Adjustable range 2	30...300 cm/s
Medium	Water
Measuring error	2 %
Switching Hysteresis	5 %
Temperature gradient	30 K
Response time in case of temperature jump	10 s

#### Environmental conditions

Temperature of medium	0...100 °C
Temperature of the medium, short-term	140 °C
Ambient temperature	-20...70 °C
Mechanical Strength	60 bar
EMC	DIN EN 60947-5-9
Shock resistance per DIN IEC 68-2-27	30 g / 11 ms
Vibration resistance per DIN IEC 60068-2-6	20 g (10...2000 Hz)

#### Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (Ub = 24 V)	60 mA
Switching Outputs	1
Analog Output	4...20 mA Flow
Response Time	1...5 s
Switching Output/Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

#### Mechanical Data

Setting Method	Menu
Housing Material	PBT; PC; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4404; FKM
Degree of Protection	IP67 *
Connection	M12 x 1; 4-pin
Process Connection	G 1/2"
Process Connection Length (PCL)	47 mm
Probe Length (PL)	10 mm

#### Safety-relevant Data

MTTFd (EN ISO 13849-1)	1194,55 a
Diagnostic Coverage (DC)	0 %
Service Life TM (EN ISO 13849-1)	20 a

Analog output flow



PNP NO/NC switchable



Connection Diagram No.

533

Control Panel No.

A03

Suitable Connection Technology No.

21

Suitable Mounting Technology No.


903 | 905

\* Tested by wenglor

### Complementary Products


Seal G1/2" ZH5G002

Software

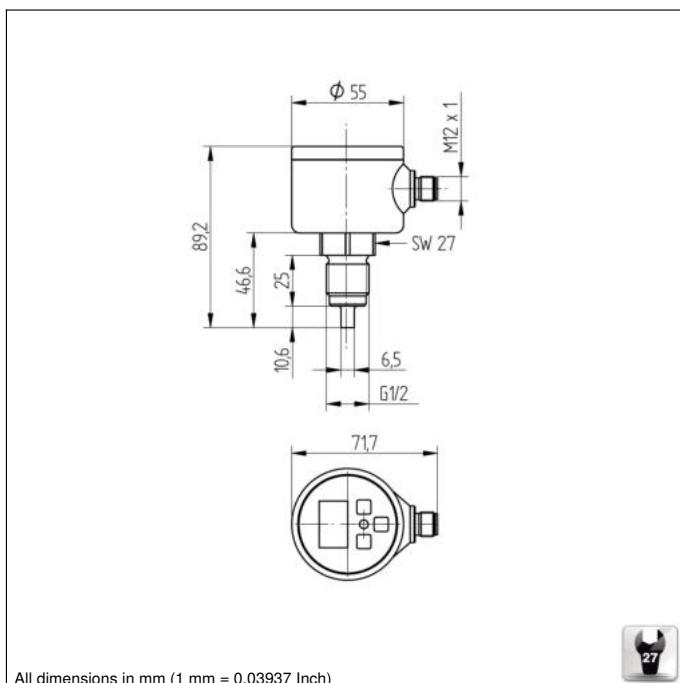


All dimensions in mm (1 mm = 0.03937 Inch)

### Ctrl. Panel

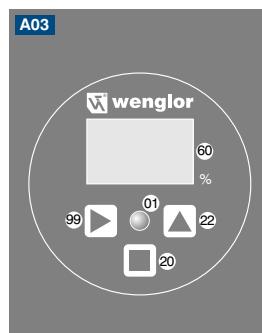

01 = Switching Status Indicator  
20 = Enter Button  
22 = UP Button  
60 = Display  
99 = Right button

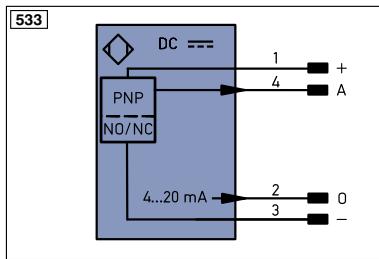

#### Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ā	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	E+	Receiver-Line
RDY	Ready	S+	Emitter-Line
GND	Ground	÷	Grounding
CL	Clock	SnR	Switching Distance Reduction
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path
IO-Link		Tx+/-	Ethernet Send Path
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)B(-)
IN	Safety Input	La	Emitted Light disengageable
SSO	Safety Output	Mag	Magnet activation
Signal	Signal Output	RES	Input confirmation
BL-D	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contactor Monitoring
EN0RS422	Encoder 0-pulse 0-0 (TTL)	ENArS422	Encoder A/A (TTL)
ENBrS422	Encoder B/B (TTL)	ENBrS422	Encoder B/B (TTL)

EN <sub>A</sub>	Encoder A
EN <sub>B</sub>	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY IN	Synchronization IN
SY OUT	Synchronization OUT
OL	Brightness output
M	Maintenance
rsv	reserved

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

