

Reflex Sensor with Background Suppression


OPT1508

Part Number



- **Energy-saving**
- **Optimized performance**
- **Scaled switching distance adjuster**
- **Time-saving installation with fast-clip mounting system**

These sensors have been specially designed for use in accumulation roller conveyors. Their compact design allows for installation between rollers below the transport level. High-precision background suppression makes it possible to reliably detect even black objects at up to 900 mm. The scaled switching-distance adjuster assures quick and simple adjustment to the desired distance. Thanks to the innovative fast-clip mounting system and quick wiring, the sensor are installed and ready for use in no time flat.

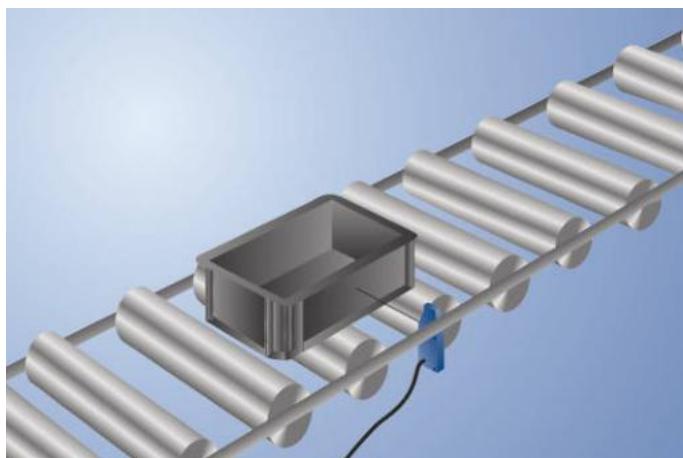

Technical Data

Optical Data

Range	900 mm
Switching Hysteresis	< 5 %
Light Source	Infrared Light
Wavelength	860 nm
Service Life (T = +25 °C)	100000 h
Risk Group (EN 62471)	1
Max. Ambient Light	90000 Lux
Opening Angle	3 °

Electrical Data

Supply Voltage	12...30 V DC
Current Consumption Sensor (Ub = 24 V)	< 16 mA
Switching Frequency	100 Hz
Response Time	5 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 0,9 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Logic	no
Protection Class	III


Mechanical Data

Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 x 1; 4-pin
PNP NO/NC antivalent	
Connection Diagram No.	754
Control Panel No.	OP1
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	421

Complementary Products

PNP-NPN Converter BG2V1P-N-2M

ZPTX001 Quick Mount

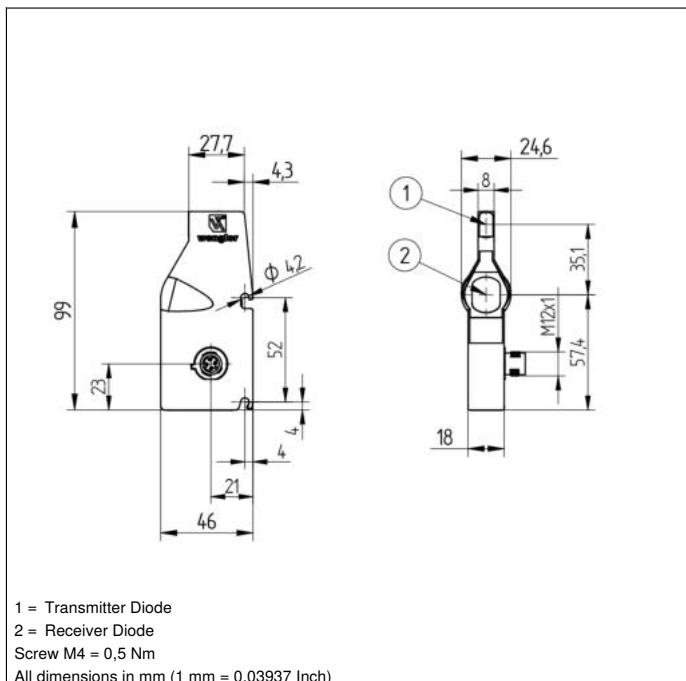


1 = Transmitter Diode

2 = Receiver Diode

Screw M4 = 0,5 Nm


All dimensions in mm (1 mm = 0.03937 Inch)

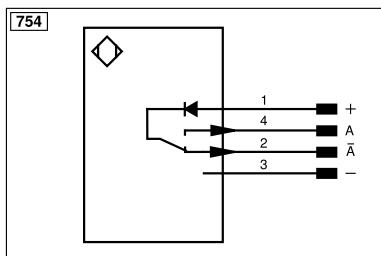

Legend						
+	Supply Voltage +	nc	Not connected	EN _{BrS422}	Encoder B/̄B (TTL)	
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A	
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENb	Encoder B	
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN	
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX	
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK	
Ā	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In	
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT	
T	Teach Input	AMV	Valve Output	OLT	Brightness output	
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance	
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved	
RxD	Interface Receive Path	SY	Synchronization		Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black	
RDY	Ready	E+	Receiver-Line	BN	Brown	
GND	Ground	S+	Emitter-Line	RD	Red	
CL	Clock	⊻	Grounding	OG	Orange	
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow	
Io-L	Io-Link	Rx/-/	Ethernet Receive Path	GN	Green	
PoE	over ether Ethernet	Tx/-/	Ethernet Send Path	BU	Blue	
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet	
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey	
Signal	Signal Output	Mag	Magnet activation	WH	White	
BL	Ethernet Gigabit bidirec. data line (A-D)	RES	Input confirmation	PK	Pink	
EN _{BrS422}	Encoder 0-pulse 0/̄0 (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow	
PT	Platinum measuring resistor	EN _{BrS422}	Encoder A/Ā (TTL)			

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

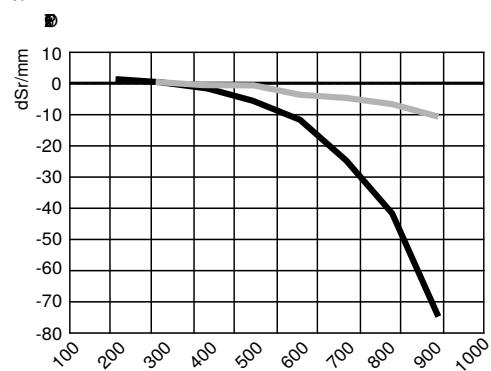

Sr = Switching Distance

dSr = Switching Distance Change

- black 6 % remission
- grey 18 % remission

