

Retro-Reflex Sensor for Transparent Objects

P1NK202

Part Number



- Condition monitoring
- IO-Link 1.1
- No blind spot from single-lens optics
- Special for glass, PET and films

The retro-reflex sensor for clear glass recognition works with red light and a reflector. Where conventional retro-reflex light barriers reach their limits, this retro-reflective barrier for clear glass recognition ensures that extremely shiny objects like glass, PET bottles, trays or film can be detected. Via the single-lens optic without blind spots, the sensor can detect objects even through small holes and gaps. The IO-Link interface can be used to configure retro-reflective barriers (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and signal values.




Technical Data

Optical Data	
Range	2600 mm
Reference Reflector/Reflector Foil	RQ100BA
Clear Glass Recognition	yes
Smallest Recognizable Part	see Table 2
Switching Hysteresis	< 5 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	2000 Hz
Switching frequency (speed mode)	3500 Hz
Response Time	0,25 ms
Response time (speed mode)	0,14 ms
Temperature Drift	< 3 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2690,44 a
IO-Link	●
PNP NO/NC antivalent	●
Connection Diagram No.	215
Control Panel No.	A28
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	350


Complementary Products

Dust Extraction Tube STAUBTUBUS-03
IO-Link Master
Reflector, Reflector Foil
Set Protective Housing Z1NS001
Software

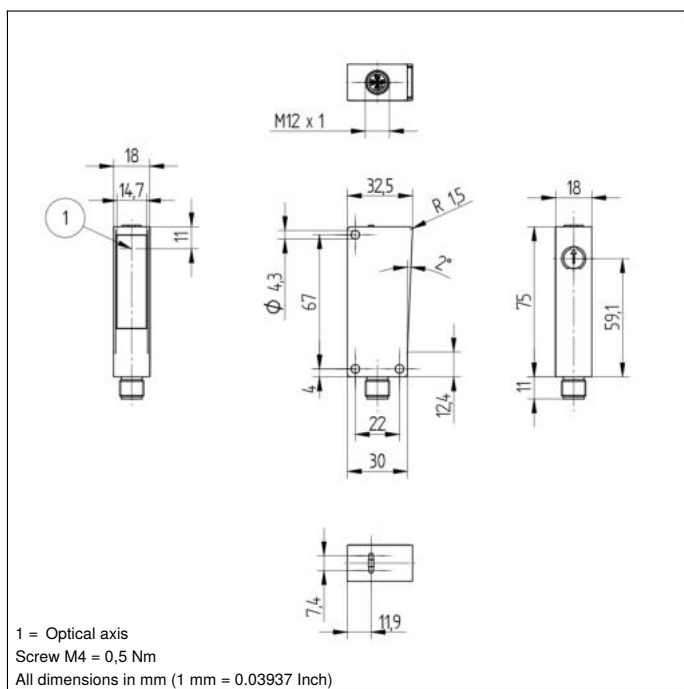


Ctrl. Panel

A28



05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning
68 = supply voltage indicator

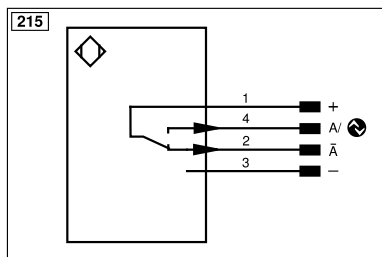

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENAR422	Encoder A/Ā (TTL)
		ENB422	Encoder B/B̄ (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		ACK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Table 1

Working Distance	0,5 m	1,3 m	2,6 m
Light Spot Diameter	30 mm	45 mm	80 mm

Table 2

Distance, Sensor to Reflector	0,5 m	1,3 m	2,6 m
Smallest Recognizable Part	1,5 mm	4 mm	15 mm

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...2,6 m	RR21_M	0...0,65 m
RE18040BA	0...1,5 m	ZRAE02B01	0...0,9 m
RQ84BA	0...1,8 m	ZRME01B01	0...0,25 m
RR84BA	0...2,2 m	ZRME03B01	0...1,1 m
RE9538BA	0...0,85 m	ZRMR02K01	0...0,3 m
RE6151BM	0...2 m	ZRMS02_01	0...0,5 m
RR50_A	0...1,55 m	RF505	0...0,4 m
RE6040BA	0...1,8 m	RF508	0...0,4 m
RE8222BA	0...1,1 m	RF258	0...0,4 m
RR34_M	0...1,2 m	ZRAF07K01	0...0,4 m
RE3220BM	0...0,9 m	ZRAF08K01	0...0,4 m
RE6210BM	0...0,5 m	ZRDF03K01	0...1,3 m
RR25_M	0...0,65 m	ZRDF10K01	0...1,4 m
RR25KP	0...0,35 m		

