


555 10000	DATA SHEET	
Valid from: 27.05.2020	SILVYN® BMC-M	

SILVYN® BMC-M is a brass coupler with two metric threads. Protection conduits can be extended by the coupler.



- Material:** Brass, nickel plated
- Features:** High mechanical strength
Corrosion resistant
- Temperature range:** -100°C up to +300°C
- Protection class:** Up to IP68, depended on the used SILVYN® Conduit system

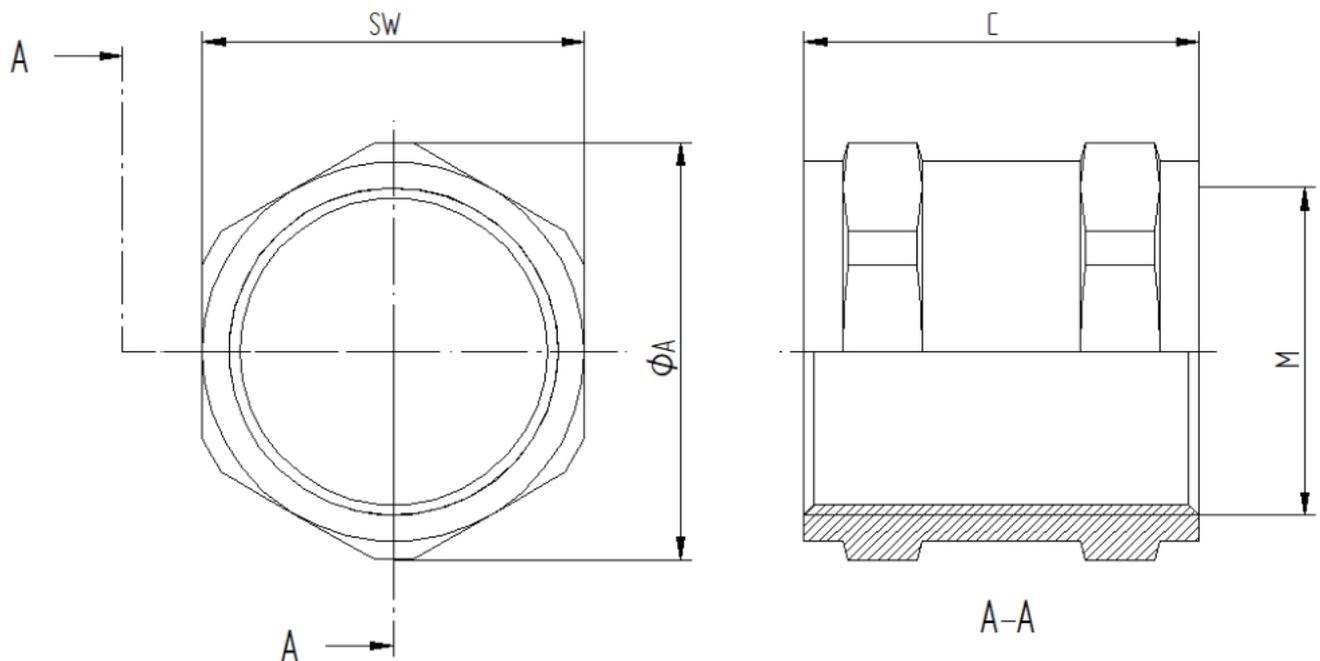

Dimension table:

Part No.	Description	Thread M mm	Length C mm	Diameter A mm	Wrench Size SW
5551 0000	SILVYN® BMC-M 16x1,5	16x1,5	22,5	22,0	20
5551 0010	SILVYN® BMC-M 20x1,5	20x1,5	25,0	26,4	24
5551 0020	SILVYN® BMC-M 25x1,5	25x1,5	30,0	31,9	29
5551 0030	SILVYN® BMC-M 32x1,5	32x1,5	32,5	38,5	35
5551 0040	SILVYN® BMC-M 40x1,5	40x1,5	34,0	53,0	48
5551 0050	SILVYN® BMC-M 50x1,5	50x1,5	38,0	63,8	58
5551 0060	SILVYN® BMC-M 63x1,5	63x1,5	45,0	77,0	70
5551 0070	SILVYN® BMC-M 75x1,5	75x1,5	45,0	93,0	84

AbN
automation

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1 /PDP Released: DAMU1/PDP	Document: DB55510000EN Version: 02	Page 1 of 1
---	---------------------------------------	-------------